



Pure Freude
an Wasser

GROHE



CATALOGUE 2024/2025

GROHE & GROHE SPA



GROHE SPA

GROHE

TABLE OF CONTENTS

| | | | |
|------------------|-------------------------|--|-----|
| SPA Bath faucets | Faucets and Ceramics | Allure Brilliant Icon 3D / Atrio Icon 3D | 14 |
| | | Atrio | 15 |
| | | Atrio Private Collection | 28 |
| | | Allure | 37 |
| | | Allure Brilliant | 49 |
| | | Allure Brilliant Private Collection | 56 |
| | | Grandera | 64 |
| | | Airio | 72 |
| | | Glass module and flush plates | 73 |
| SPA Showers | Showers and Thermostats | Aquasymphony | 76 |
| | | F-digital Deluxe | 77 |
| | | Rainshower Aqua Pure | 81 |
| | | Rainshower Aqua ceiling showers | 86 |
| | | Rainshower Aqua head showers | 89 |
| | | Rainshower Aqua body sprays | 91 |
| | | Rainshower Aqua hand showers | 92 |
| | | SPA shower accessories | 94 |
| | | SPA thermostats | 97 |
| Bath fittings | SmartControl | SmartControl mixers | 112 |
| | Fittings | Lineare | 115 |
| | | Eurocube | 121 |
| | | GROHE Plus | 126 |
| | | Essence | 132 |
| | | Eurodisc Cosmopolitan | 141 |
| | | Concetto | 144 |
| | | Eurostyle Cosmopolitan | 149 |
| | | Eurostyle | 153 |
| | | Cubeo | 159 |
| | | Eurocosmo | 163 |
| | | Eurosmart | 168 |
| | | Eurosmart Care | 174 |

GROHE

TABLE OF CONTENTS

| | | |
|---------------------|--------------------------------|-----|
| | Euroeco | 177 |
| | BauEdge | 182 |
| | BauLoop | 186 |
| | BauClassic | 190 |
| | BauCurve | 192 |
| | BauFlow | 193 |
| | Two Handle fittings | 195 |
| | Universal | 197 |
| | Bath sets | 198 |
| | Accessories | 199 |
| | Selection | |
| | Selection Cube | 204 |
| | Essentials | 207 |
| | Essentials Cube | 214 |
| | BauCosmopolitan | 218 |
| | Essentials Authentic | 221 |
| Thermostats | Grohtherm | 224 |
| | Grohtherm SmartControl | |
| | Grohtherm 2 handle trim sets | 232 |
| | Grohtherm 2000 | 237 |
| | Grohtherm Cube | 238 |
| | Grohtherm 1000 | 240 |
| | Grohtherm 1000 Performance | 242 |
| | Grohtherm 800 Cosmopolitan | 243 |
| | Grohtherm 800 | 244 |
| | Grohtherm 500 | 245 |
| Concealed solutions | GROHE Rapido SmartBox | 248 |
| | GROHE Rapido Shower Frame | 249 |
| | GROHE Rapido C / stop valves | 250 |
| | GROHE Rapido T | 251 |
| Showers | Shower Systems | 254 |
| | Rainshower System SmartControl | |
| | Rainshower SmartActive System | 256 |
| | Rainshower System | 258 |

GROHE

TABLE OF CONTENTS

| | | |
|------------------|--|-----|
| | Euphoria SmartControl System | 259 |
| | Euphoria System | 262 |
| | Tempesta System 250 | 266 |
| | Shower system accessories | 277 |
| Head showers | Head shower sets | 281 |
| | Head showers | 288 |
| | Accessories for head showers | 292 |
| Showers | Rainshower SmartActive | 294 |
| | Euphoria | 301 |
| | Tempesta | 308 |
| | Tempesta Cube | 314 |
| | Tempesta-F trigger sprays | 319 |
| | Shower hoses | 321 |
| | Shower accessories | 324 |
| Kitchen fittings | Water systems | |
| | GROHE Blue Professional | 332 |
| | GROHE Blue Home | 336 |
| | GROHE Blue Pure | 342 |
| | GROHE Blue accessories | 344 |
| | GROHE Red | 347 |
| Premium lines | K7 | 350 |
| | Zedra / Zedra SmartControl / Zedra Touch | 351 |
| | Essence | 353 |
| | Minta / Minta SmartControl / Minta Touch | 356 |
| | Eurocube | 360 |
| Competence lines | Eurodisc Cosmopolitan | 361 |
| | Concetto | 362 |
| | Eurocosmo | 364 |
| | Eurosmart | 365 |
| | Costa | 368 |
| | Bau Lines | 369 |
| | Kitchen accessories | 371 |

GROHE

TABLE OF CONTENTS

| | | |
|----------------------|----------------------|-----------------------------------|
| | Kitchen sinks | |
| | | Stainless steel sinks |
| | | 373 |
| | | Composite sinks |
| | | 382 |
| | | Kitchen sink accessories |
| | | 389 |
| Special faucets | Electronic fittings | |
| | | Eurocube E |
| | | 392 |
| | | Essence E |
| | | 394 |
| | | Europlus E |
| | | 397 |
| | | Eurosmart Cosmopolitan E |
| | | 399 |
| | | Euroeco Cosmopolitan E |
| | | 405 |
| | | Bau Cosmopolitan E |
| | | 407 |
| | Special thermostats | |
| | | Grohtherm Micro |
| | | 409 |
| | | Grohtherm Special |
| | | 410 |
| | Single-lever mixers | |
| | | Euroeco Special |
| | | 412 |
| | | Euroeco Single Sequential |
| | | 413 |
| | Self-closing faucets | |
| | | Eurosmart Cosmopolitan T |
| | | 414 |
| | | Euroeco Cosmopolitan T |
| | | 415 |
| Smart toilets | | |
| | | GROHE Sensia Pro |
| | | 418 |
| | | GROHE Sensia Arena |
| | | 420 |
| Ceramics | | |
| | | Essence |
| | | 424 |
| | | Cube Ceramic |
| | | 427 |
| | | Euro Ceramic |
| | | 430 |
| | | BauEdge Ceramic |
| | | 434 |
| | | Bau Ceramic |
| | | 435 |
| | | Acrylic shower trays |
| | | 441 |
| Installation Systems | Rapid SLX | Rapid SLX |
| | | 444 |
| | Rapid SL | Rapid SL for WC |
| | | 445 |
| | | Rapid SL for urinal |
| | | 450 |
| | | Rapid SL for wash basin and bidet |
| | | 451 |
| | | Rapid SL for support rails |
| | | 453 |
| | | Rapid SL accessories |
| | | 454 |
| | | Rapido Shower Frame |
| | | 455 |
| | Uniset | Uniset frames and accessories |
| | | 456 |

GROHE

TABLE OF CONTENTS

| | | | |
|--------------------------|--------|-----------------------------------|-----|
| Flushing systems | WC | Flushing cisterns | 462 |
| | | Accessories for flushing cisterns | 463 |
| | | WC flush valves | 466 |
| | | Electronic actuations for WC | 468 |
| | Urinal | Electronic actuations for urinal | 470 |
| | | Urinal flush valves | 473 |
| Actuations | WC | Flush plates for WC | 476 |
| | | GROHE Fresh | 483 |
| | | Flush plates for WC flush valves | 484 |
| | Urinal | Flush plates for urinal | 485 |
| Connections and Security | | Angle valves | 488 |
| | | Safety systems | 490 |
| Survey of contents | | | 491 |





G R O H E S P A

SALUS PER AQUAM
HEALTH THROUGH WATER

Nothing compares to the power of water –
it is cleansing, invigorating and healing.

A true elixir of life, water gives us precious moments of indulgent bliss. By harnessing these positive effects, we can switch off from the noise of the outside world to find peace for body, mind and soul. By immersing ourselves in soothing water rituals, we can inspire the senses to find equilibrium and hidden strength. Guided by the underlying belief that water is the source of vital energy, GROHE has revitalized GROHE SPA as a timeless sub-brand. A decade after GROHE SPA was first launched, our passion for water is tangible in every detail of every product.

Aimed at architects, designers and specifiers, as well as high-end showrooms, GROHE SPA represents the apex of what we can achieve. We are redefining what is possible to lift innovation, technology and precision to uncharted levels. We curate only the most exclusive, luxurious products to create exquisite places of retreat. Progressive designs are fused with carefully selected colors, materials and finishes. Versatile customization options transform the bathroom into a home spa, impeccably tailored to individual preferences.

GROHE SPA bathes us in blissful new multisensory experiences. Soothing, memorable and distinctive – just like the calming sound of water.





GROHE SPA BATH FAUCETS









CONTENTS

| | |
|--|----|
| Allure Brilliant Icon 3D / Atrio Icon 3D | 14 |
| Atrio | 15 |
| Atrio Private Collection | 28 |
| Allure | 37 |
| Allure Brilliant | 49 |
| Allure Brilliant Private Collection | 56 |
| Grandera | 64 |
| Airio | 72 |
| Glass module and flush plates | 73 |




GROHE SPA

ALLURE BRILLIANT ICON 3D /
ATRIO ICON 3D
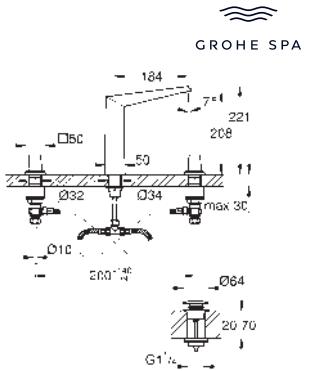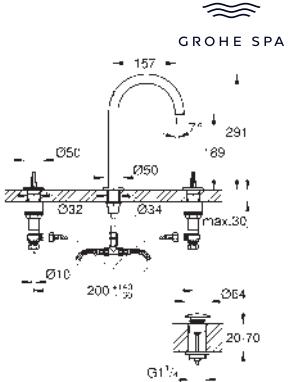
| Ref. no. | Colour |
|--|--|
|   | 20 635 SD0 stainless steel Allure Brilliant 3-hole wall-mount basin mixer GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min spout with integrated mousseur red and blue markings on handles for hot and cold water valves hot/cold with ceramic headparts flexible connection hoses between spout and side valves projection 256 mm technical data flow pressure min 0.5 bar recommended pressure 1.0 - 5.0 bar if static pressure is more than 5 bar fit pressure reducer avoid major pressure differences between cold and hot water supply max. temperature hot water inlet: 80°C recommended temperature hot water inlet (energy saving): 60°C |
|   | 20 634 SD0 stainless steel Allure Brilliant 3-hole deck-mount basin mixer GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min spout with integrated mousseur red and blue markings on handles for hot and cold water valves hot/cold with ceramic headparts Push-open waste set 1 1/4" flexible connection hoses between spout and side valves technical data flow pressure min 0.5 bar recommended pressure 1.0 - 5.0 bar if static pressure is more than 5 bar fit pressure reducer avoid major pressure differences between cold and hot water supply max. temperature hot water inlet: 80°C recommended temperature hot water inlet (energy saving): 60°C |
|   | 20 664 SD0 stainless steel Atrio Icon 3D 3-hole deck-mount basin mixer GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min open spout for pure laminar water flow red and blue markings on handles for hot and cold water valves hot/cold with ceramic headparts Push-open waste set 1 1/4" flexible connection hoses between spout and side valves technical data flow pressure min 0.5 bar recommended pressure 1.0 - 5.0 bar if static pressure is more than 5 bar fit pressure reducer avoid major pressure differences between cold and hot water supply max. temperature hot water inlet: 80°C recommended temperature hot water inlet (energy saving): 60°C |
|   | 20 665 SD0 stainless steel Atrio Icon 3D 3-hole wall-mount basin mixer GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min open spout for pure laminar water flow red and blue markings on handles for hot and cold water valves hot/cold with ceramic headparts flexible connection hoses between spout and side valves projection 235 mm technical data flow pressure min 0.5 bar recommended pressure 1.0 - 5.0 bar if static pressure is more than 5 bar fit pressure reducer avoid major pressure differences between cold and hot water supply max. temperature hot water inlet: 80°C recommended temperature hot water inlet (energy saving): 60°C |



GROHE SPA

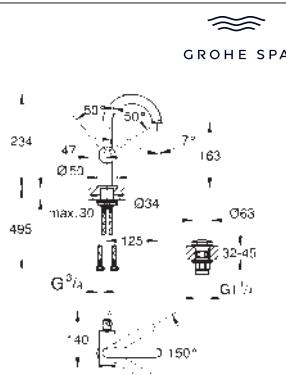GROHE
ATRIOSPA BATH
FAUCETS

Ref. no.

Colour

| | |
|------------|-----------------------|
| 24 363 000 | chrome |
| 24 363 DC0 | supersteel |
| 24 363 GL0 | cool sunrise |
| 24 363 GN0 | brushed cool sunrise |
| 24 363 DAO | warm sunset |
| 24 363 DLO | brushed warm sunset |
| 24 363 AL0 | brushed hard graphite |

Atrio

Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove 28 mm ceramic cartridge

with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow


maximum flow rate (at 3 bar): 5 l/min

swivel tubular C-spout with mousseur, stop limiter

adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

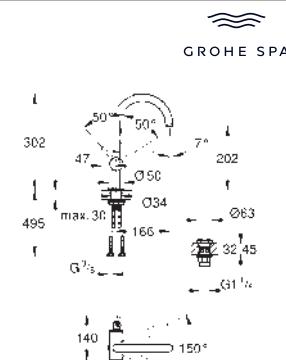

| | |
|------------|-----------------------|
| 24 362 000 | chrome |
| 24 362 DC0 | supersteel |
| 24 362 GL0 | cool sunrise |
| 24 362 GN0 | brushed cool sunrise |
| 24 362 DAO | warm sunset |
| 24 362 DLO | brushed warm sunset |
| 24 362 AL0 | brushed hard graphite |

Atrio

Single-lever basin mixer 1/2"

L-Size

GROHE SilkMove 28 mm ceramic cartridge

with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow


maximum flow rate (at 3 bar): 5 l/min

swivel tubular C-spout with mousseur, stop limiter

adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

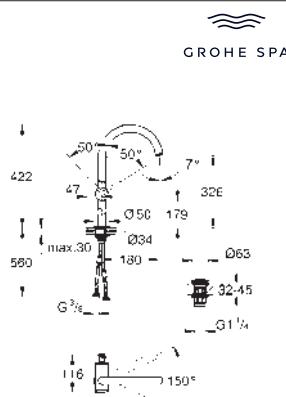

| | |
|------------|-----------------------|
| 24 365 000 | chrome |
| 24 365 DC0 | supersteel |
| 24 365 GL0 | cool sunrise |
| 24 365 GN0 | brushed cool sunrise |
| 24 365 DAO | warm sunset |
| 24 365 DLO | brushed warm sunset |
| 24 365 AL0 | brushed hard graphite |

Atrio

Single-lever basin mixer 1/2"

XL-Size

for free-standing basins

GROHE SilkMove 28 mm ceramic cartridge

with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow


maximum flow rate (at 3 bar): 5 l/min

swivel tubular C-spout with mousseur, stop limiter

adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

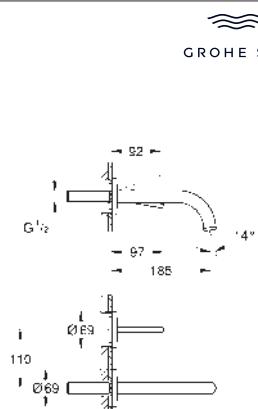

GROHE SPA

Ref. no.

Colour

| | |
|------------|-----------------------|
| 29 410 000 | chrome |
| 29 410 DC0 | supersteel |
| 29 410 GLO | cool sunrise |
| 29 410 GN0 | brushed cool sunrise |
| 29 410 DAO | warm sunset |
| 29 410 DL0 | brushed warm sunset |
| 29 410 AL0 | brushed hard graphite |

Atrio

Two-hole basin mixer joystick

wall mounted

without concealed body

final installation for 23 429

GROHE FeatherControl Joystick cartridge

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

centre distance 110 mm

projection 185 mm


GROHE SPA

| | |
|------------|-----------------------|
| 29 406 000 | chrome |
| 29 406 DC0 | supersteel |
| 29 406 GLO | cool sunrise |
| 29 406 GN0 | brushed cool sunrise |
| 29 406 DAO | warm sunset |
| 29 406 DL0 | brushed warm sunset |
| 29 406 AL0 | brushed hard graphite |

ditto, projection 221 mm

23 429 000

Rough-in for Joystick 2-hole basin mixers

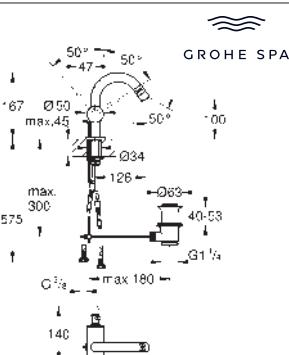

GROHE SPA

| | |
|------------|-----------------------|
| 24 364 000 | chrome |
| 24 364 DC0 | supersteel |
| 24 364 GLO | cool sunrise |
| 24 364 GN0 | brushed cool sunrise |
| 24 364 DAO | warm sunset |
| 24 364 DL0 | brushed warm sunset |
| 24 364 AL0 | brushed hard graphite |

Atrio

Single-lever bidet mixer 1/2"


GROHE SilkMove 28 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish

tubular C-spout with ball-joint mousseur

pop-up waste set 1 1/4"

flexible connection hoses

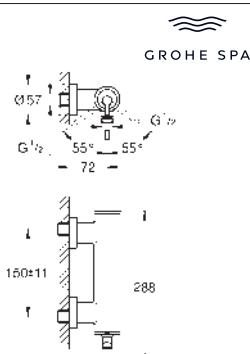

GROHE SPA

| | |
|------------|-----------------------|
| 24 366 000 | chrome |
| 24 366 DC0 | supersteel |
| 24 366 GLO | cool sunrise |
| 24 366 GN0 | brushed cool sunrise |
| 24 366 DAO | warm sunset |
| 24 366 DL0 | brushed warm sunset |
| 24 366 AL0 | brushed hard graphite |

Atrio

Single-lever shower mixer 1/2"

wall mounted

GROHE SilkMove 35 mm ceramic cartridge


GROHE Long-Life finish

adjustable flow rate limiter

shower bottom outlet with integrated non return-valve

covered S-unions

protected against backflow

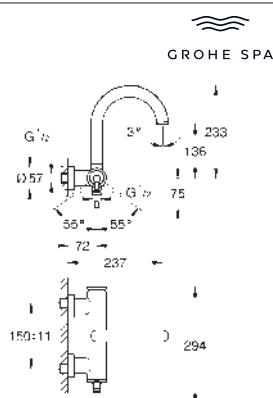

Ref. no.

Colour

| | |
|------------|-----------------------|
| 24 367 000 | chrome |
| 24 367 DC0 | supersteel |
| 24 367 GL0 | cool sunrise |
| 24 367 GN0 | brushed cool sunrise |
| 24 367 DAO | warm sunset |
| 24 367 DL0 | brushed warm sunset |
| 24 367 AL0 | brushed hard graphite |

Atrio

Single-lever bath mixer 1/2"

wall mounted

GROHE SilkMove 35 mm ceramic cartridge

GROHE Long-Life finish

adjustable flow rate limiter

automatic diverter: bath/shower


cast spout

mousseur

shower bottom outlet with integrated non return-valve

covered S-unions

protected against backflow



PROFESSIONAL GROHE

| | |
|------------|-----------------------|
| 24 354 000 | chrome |
| 24 354 DC0 | supersteel |
| 24 354 GL0 | cool sunrise |
| 24 354 GN0 | brushed cool sunrise |
| 24 354 DAO | warm sunset |
| 24 354 DL0 | brushed warm sunset |
| 24 354 AL0 | brushed hard graphite |

Atrio

Single-lever shower mixer

final installation for GROHE Rapido SmartBox (35 604)


GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable outlet B or C = 30 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



PROFESSIONAL GROHE

| | |
|------------|-----------------------|
| 24 355 000 | chrome |
| 24 355 DC0 | supersteel |
| 24 355 GL0 | cool sunrise |
| 24 355 GN0 | brushed cool sunrise |
| 24 355 DAO | warm sunset |
| 24 355 DL0 | brushed warm sunset |
| 24 355 AL0 | brushed hard graphite |

Atrio

Single-lever mixer with 2-way diverter

final installation for GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge


GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation

Ref. no. Colour



PROFESSIONAL GROHE

| | |
|------------|-----------------------|
| 24 356 000 | chrome |
| 24 356 DC0 | supersteel |
| 24 356 GL0 | cool sunrise |
| 24 356 GN0 | brushed cool sunrise |
| 24 356 DAO | warm sunset |
| 24 356 DL0 | brushed warm sunset |
| 24 356 AL0 | brushed hard graphite |

Atrio

Single-lever mixer with 3-way diverter
final installation for GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge


GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

3-way diverter

outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



PROFESSIONAL GROHE

| | |
|------------|-----------------------|
| 24 357 000 | chrome |
| 24 357 DC0 | supersteel |
| 24 357 GL0 | cool sunrise |
| 24 357 GN0 | brushed cool sunrise |
| 24 357 DAO | warm sunset |
| 24 357 DL0 | brushed warm sunset |
| 24 357 AL0 | brushed hard graphite |

Atrio

Safety mixer for 1 outlet with shut off valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable


GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers

ceramic stop valve, 120°

outlet B = 27 l/min, outlet C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



PROFESSIONAL GROHE

| | |
|------------|-----------------------|
| 24 358 000 | chrome |
| 24 358 DC0 | supersteel |
| 24 358 GL0 | cool sunrise |
| 24 358 GN0 | brushed cool sunrise |
| 24 358 DAO | warm sunset |
| 24 358 DL0 | brushed warm sunset |
| 24 358 AL0 | brushed hard graphite |

Atrio

Safety shower mixer for 2 outlets with integrated shut off/diverter valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable


printed head and hand shower symbol

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
GROHE AquaDimmer, integrated shut off/diverter valve

outlet B = 27 l/min, outlet C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



Ref. no.

Colour

| | |
|------------|-----------------------|
| 21 145 000 | chrome |
| 21 145 DC0 | supersteel |
| 21 145 GL0 | cool sunrise |
| 21 145 GN0 | brushed cool sunrise |
| 21 145 DAO | warm sunset |
| 21 145 DL0 | brushed warm sunset |
| 21 145 AL0 | brushed hard graphite |

Atrio

Single-hole basin mixer 1/2"

L-Size

ceramic headparts 1/2", 90°

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

swivel tubular spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

with lever handles

Sets of caps with „H“ and „C“ marking and without marking



| | |
|------------|-----------------------|
| 21 144 000 | chrome |
| 21 144 DC0 | supersteel |
| 21 144 GL0 | cool sunrise |
| 21 144 GN0 | brushed cool sunrise |
| 21 144 DAO | warm sunset |
| 21 144 DL0 | brushed warm sunset |
| 21 144 AL0 | brushed hard graphite |

Atrio

Single-hole basin mixer 1/2"

L-Size

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

swivel tubular spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

with cross handles

Sets of caps with „H“ and „C“ marking and without marking

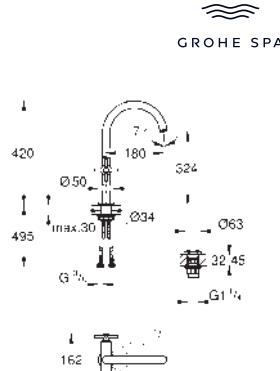

| | |
|------------|-----------------------|
| 21 149 000 | chrome |
| 21 149 DC0 | supersteel |
| 21 149 GL0 | cool sunrise |
| 21 149 GN0 | brushed cool sunrise |
| 21 149 DAO | warm sunset |
| 21 149 DL0 | brushed warm sunset |
| 21 149 AL0 | brushed hard graphite |

Atrio

Single-hole basin mixer 1/2"

XL-Size

for free-standing basins

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

swivel tubular spout with mousseur and stop limiter

adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"


flexible connection hoses

with cross handles

Sets of caps with „H“ and „C“ marking and without marking



GROHE SPA

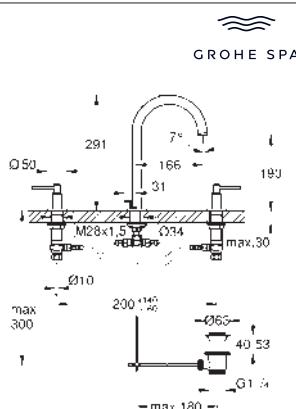GROHE
ATRIOSPA BATH
FAUCETS

Ref. no.

Colour

| | |
|------------|-----------------------|
| 20 649 000 | chrome |
| 20 649 DC0 | supersteel |
| 20 649 GLO | cool sunrise |
| 20 649 GN0 | brushed cool sunrise |
| 20 649 DAO | warm sunset |
| 20 649 DL0 | brushed warm sunset |
| 20 649 AL0 | brushed hard graphite |

Atrio

3-hole basin mixer 1/2"

L-Size

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

swivel tubular spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

pop-up waste set 1 1/4"

flexible connection hoses between spout and side valves

with lever handles

Sets of caps with „H“ and „C“ marking and without marking

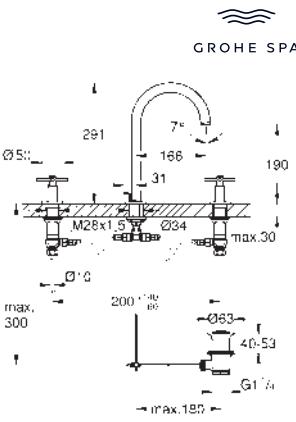

| | |
|------------|-----------------------|
| 20 643 000 | chrome |
| 20 643 DC0 | supersteel |
| 20 643 GLO | cool sunrise |
| 20 643 GN0 | brushed cool sunrise |
| 20 643 DAO | warm sunset |
| 20 643 DL0 | brushed warm sunset |
| 20 643 AL0 | brushed hard graphite |

Atrio

3-hole basin mixer 1/2"

L-Size

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

swivel tubular spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

pop-up waste set 1 1/4"

flexible connection hoses between spout and side valves

with cross handles

Sets of caps with „H“ and „C“ marking and without marking

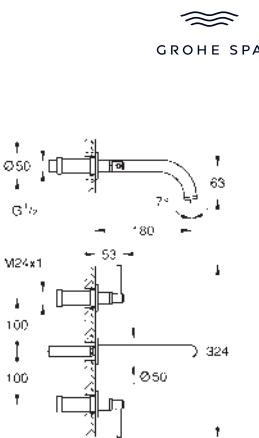

| | |
|------------|-----------------------|
| 20 662 000 | chrome |
| 20 662 DC0 | supersteel |
| 20 662 GLO | cool sunrise |
| 20 662 GN0 | brushed cool sunrise |
| 20 662 DAO | warm sunset |
| 20 662 DL0 | brushed warm sunset |
| 20 662 AL0 | brushed hard graphite |

Atrio

3-hole basin mixer 1/2"

M-Size

wall mounted

final installation for 29 025

without concealed body

headparts 1/2" - 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

centre distance 200 mm

projection 180 mm

with lever handles


Sets of caps with „H“ and „C“ marking and without marking

29 025 002

Rough-in set for 3-hole basin mixer



GROHE SPA

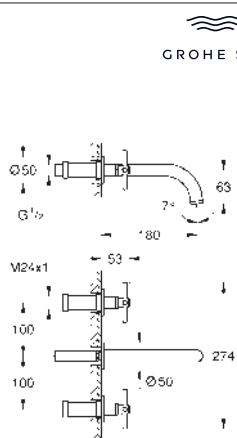GROHE
ATRIO

Ref. no.

Colour

| | |
|------------|-----------------------|
| 20 661 000 | chrome |
| 20 661 DC0 | supersteel |
| 20 661 GL0 | cool sunrise |
| 20 661 GN0 | brushed cool sunrise |
| 20 661 DAO | warm sunset |
| 20 661 DL0 | brushed warm sunset |
| 20 661 AL0 | brushed hard graphite |

Atrio**3-hole wash-basin mixer****M-Size**

wall mounted

final installation for 29 025
without concealed body

headparts 1/2" - 90°

GROHE Long-Life finish**GROHE Water Saving** - Less water, perfect flow


maximum flow rate for 3 bar: 5 l/min

centre distance 200 mm

projection 180 mm

with cross handles

Sets of caps with „H“ and „C“ marking and without marking

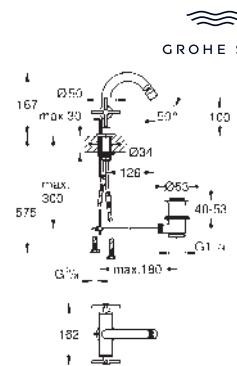29 025 002**Rough-in set for 3-hole basin mixer**

| | |
|------------|-----------------------|
| 24 353 000 | chrome |
| 24 353 DC0 | supersteel |
| 24 353 GL0 | cool sunrise |
| 24 353 GN0 | brushed cool sunrise |
| 24 353 DAO | warm sunset |
| 24 353 DL0 | brushed warm sunset |
| 24 353 AL0 | brushed hard graphite |

Atrio**Single-hole bidet mixer 1/2"**

ceramic headparts 1/2", 90°

GROHE Long-Life finish


ball-joint mousseur

pop-up waste set 1 1/4"

flexible connection hoses

with cross handles

Sets of caps with „H“ and „C“ marking and without marking

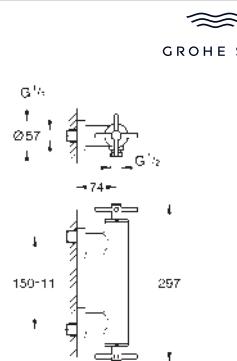

| | |
|------------|-----------------------|
| 26 895 000 | chrome |
| 26 895 DC0 | supersteel |
| 26 895 GL0 | cool sunrise |
| 26 895 GN0 | brushed cool sunrise |
| 26 895 DAO | warm sunset |
| 26 895 DL0 | brushed warm sunset |
| 26 895 AL0 | brushed hard graphite |

Atrio**Shower mixer 1/2"**

wall mounted

ceramic headparts 1/2", 90°

GROHE Long-Life finish

1/2" shower outlet

integrated non-return valve in shower outlet

covered S-unions

protected against backflow

with cross handles

Sets of caps with „H“ and „C“ marking and without marking



GROHE SPA

SPA BATH
FAUCETS

GROHE ATRIO



| | Ref. no. | Colour |
|---|------------|-----------------------|
| GROHE SPA | 25 268 000 | chrome |
| | 25 268 DC0 | supersteel |
| | 25 268 GLO | cool sunrise |
| | 25 268 GN0 | brushed cool sunrise |
| | 25 268 DAO | warm sunset |
| | 25 268 DL0 | brushed warm sunset |
| | 25 268 AL0 | brushed hard graphite |
| Atrio | | |
| Bath mixer 1/2" | | |
| wall mounted | | |
| ceramic headparts 1/2", 90° | | |
| GROHE Long-Life finish | | |
| automatic diverter: bath/shower | | |
| swivel tubular spout with stop restriction | | |
| mousseur | | |
| integrated non-return valve in shower outlet | | |
| covered S-unions | | |
| protected against backflow | | |
| with cross handles | | |
| Sets of caps with „H“ and „C“ marking and without marking | | |



| | | |
|---|------------|-----------------------|
| GROHE SPA | 25 272 000 | chrome |
| | 25 272 DC0 | supersteel |
| | 25 272 GLO | cool sunrise |
| | 25 272 GN0 | brushed cool sunrise |
| | 25 272 DAO | warm sunset |
| | 25 272 DL0 | brushed warm sunset |
| | 25 272 AL0 | brushed hard graphite |
| Atrio | | |
| Bath mixer 1/2" | | |
| floor-mounted installation | | |
| final installation for 45 984 | | |
| without roughing-in-set | | |
| ceramic headparts 1/2", 90° | | |
| GROHE Long-Life finish | | |
| automatic diverter: bath/shower | | |
| spout with mousseur | | |
| projection 301 mm | | |
| integrated non-return valve in shower outlet | | |
| hand shower Rainshower Aqua Stick (26 866) | | |
| with shower holder | | |
| Silverflex shower hose 1.250 mm (28 362) | | |
| protected against backflow | | |
| with cross handles | | |
| Sets of caps with „H“ and „C“ marking and without marking | | |

45 984 001 chrome
Rough-in set 1/2" for floor-mounted mixers/spouts




| | | |
|--|------------|-----------------------|
| GROHE SPA | 29 397 000 | chrome |
| | 29 397 DC0 | supersteel |
| | 29 397 GLO | cool sunrise |
| | 29 397 GN0 | brushed cool sunrise |
| | 29 397 DAO | warm sunset |
| | 29 397 DL0 | brushed warm sunset |
| | 29 397 AL0 | brushed hard graphite |
| Atrio | | |
| Concealed valve exposed part | | |
| for concealed valve 35 028 or 29 032 | | |
| GROHE Long-Life finish | | |
| installation depth infinitely adjustable | | |
| 20-80 mm | | |
| escutcheon with screwable wall sealing | | |
| with lever handle | | |

35 028 000
GROHE Rapido C rough-in box for single volume control



GROHE SPA

GROHE
ATRIO

Ref. no.

Colour

| | |
|------------|-----------------------|
| 29 396 000 | chrome |
| 29 396 DCO | supersteel |
| 29 396 GLO | cool sunrise |
| 29 396 GN0 | brushed cool sunrise |
| 29 396 DAO | warm sunset |
| 29 396 DLO | brushed warm sunset |
| 29 396 AL0 | brushed hard graphite |

Atrio

Concealed valve exposed part

for concealed valve 35 028 or 29 032

GROHE Long-Life finishinstallation depth infinitely adjustable 20-80 mm
escutcheon with screwable wall sealing
with cross handle

35 028 000

GROHE Rapido C rough-in box for single volume control



| | |
|------------|-----------------------|
| 29 407 000 | chrome |
| 29 407 GLO | cool sunrise |
| 29 407 GN0 | brushed cool sunrise |
| 29 407 DLO | brushed warm sunset |
| 29 407 DAO | warm sunset |
| 29 407 AL0 | brushed hard graphite |

Atrio

5-hole bath/shower combination

ceramic headparts 1/2", 90°

GROHE Long-Life finish

pre-assembled spout fixing

with lever handles

bath spout with mousseur and diverter bath/shower

hand shower Rainshower Aqua Stick 6.6 l/min

shower hose 2000 mm

flexible connection hoses

connection for shower hose

protected against backflow

can be used with 29 037

Sets of caps with „H“ and „C“ marking and without marking

29 037 002

Baseframe for installation under tiled surround



| | |
|------------|-----------------------|
| 29 408 000 | chrome |
| 29 408 DCO | supersteel |
| 29 408 GLO | cool sunrise |
| 29 408 GN0 | brushed cool sunrise |
| 29 408 DAO | warm sunset |
| 29 408 DLO | brushed warm sunset |
| 29 408 AL0 | brushed hard graphite |

Atrio

5-hole bath/shower combination

ceramic headparts 1/2", 90°

GROHE Long-Life finish

pre-assembled spout fixing

with cross handles

bath spout with mousseur and diverter bath/shower

hand shower Rainshower Aqua Stick 6.6 l/min

shower hose 2000 mm

flexible connection hoses

connection for shower hose

protected against backflow

can be used with 29 037

Sets of caps with „H“ and „C“ marking and without marking

29 037 002

Baseframe for installation under tiled surround



| | |
|------------|-----------------------|
| 13 487 000 | chrome |
| 13 487 DCO | supersteel |
| 13 487 GLO | cool sunrise |
| 13 487 GN0 | brushed cool sunrise |
| 13 487 DAO | warm sunset |
| 13 487 DLO | brushed warm sunset |
| 13 487 AL0 | brushed hard graphite |

Atrio

Bath spout

wall mounted

GROHE Long-Life finish

mousseur


projection 171 mm




GROHE SPA

GROHE
ATRIOSPA BATH
FAUCETS


Ref. no. Colour



GROHE SPA

40 884 000
40 884 DC0
40 884 GL0
40 884 GN0
40 884 DAO
40 884 DL0
40 884 AL0chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite**Atrio****Holder**fits glass 40 882 000 or soap dispenser 40 886 xx0 (please order separately)
material: metal
concealed fastening
GROHE Long-Life finish

GROHE SPA

40 886 000
40 886 DC0
40 886 GL0
40 886 GN0
40 886 DAO
40 886 DL0
40 886 A00
40 886 AL0chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
hard graphite
brushed hard graphite**Soap dispenser**material: glass / metal
filling quantity 160 ml
fits holder Atrio 40 884 xx0 (please order separately)

GROHE SPA


40 882 000

chrome


Glass

material: glass

fits holders Allure 40 278 001 and Atrio 40 884 xx0 (please order separately)



GROHE SPA

40 885 000
40 885 DC0
40 885 GL0
40 885 GN0
40 885 DAO
40 885 DL0
40 885 AL0chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite**Atrio****Holder**fits soap dish 40 883 000 or hair dryer inlet 40 964 001 (please order separately)
material: metal
concealed fastening
GROHE Long-Life finish

GROHE SPA

40 883 000
Soap dish

chrome

material: glass

fits holders Allure (40 963 001) and Atrio (40 885 xx0), please order separately



GROHE SPA

GROHE
ATRIO

| | Ref. no. | Colour |
|---|--|---|
|  | 40 964 001 Allure Hair dryer inlet material: plastic fits holders Allure (40 963 xx1) and Atrio (40 885 xx0), please order separately | chrome/frosted granite |
|  | 40 887 000 40 887 DC0 40 887 GLO 40 887 DAO 40 887 DL0 40 887 AL0 Atrio Towel ring material: metal concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|  | 40 888 000 40 888 DC0 40 888 GLO 40 888 GN0 40 888 DAO 40 888 DL0 40 888 AL0 Atrio Towel holder material: metal 2 arms, pivotable length 489 mm concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|  | 40 889 000 40 889 DC0 40 889 GLO 40 889 DAO 40 889 DL0 40 889 AL0 Atrio Towel holder 650 mm (drilling length 600 mm) material: metal concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|  | 40 890 000 40 890 DC0 40 890 GLO 40 890 DAO 40 890 DL0 40 890 AL0 Atrio Bathrobe hook material: metal concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise warm sunset brushed warm sunset brushed hard graphite |




GROHE SPA

GROHE
ATRIOSPA BATH
FAUCETS

Ref. no.

Colour




GROHE SPA

40 891 000
40 891 DC0
40 891 GL0
40 891 DA0
40 891 DL0
40 891 AL0

chrome
supersteel
cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Atrio
Toilet paper holder
material: metal
concealed fastening
without cover
GROHE Long-Life finish



GROHE SPA


40 892 000
40 892 DC0
40 892 GL0
40 892 GN0
40 892 DA0
40 892 DL0
40 892 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Atrio
Toilet brush set
material: glass / metal
wall mounted
concealed fastening
GROHE Long-Life finish

40 791 001
40 791 KS1
Spare brush head

white
velvet black

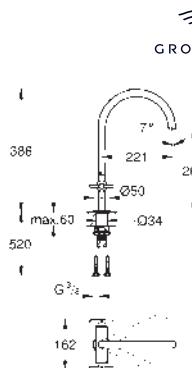


GROHE SPA

30 609 000
30 609 DC0
30 609 GN0
30 609 AL0
30 609 DL0

chrome
supersteel
brushed cool sunrise
brushed hard graphite
brushed warm sunset

Atrio
Two handle sink mixer 1/2" L-size
C-spout
GROHE Long-Life finish
ceramic headparts 1/2", 90°
selectable swivel area: 0° / 150° / 360°
flexible connection hoses
rapid installation system

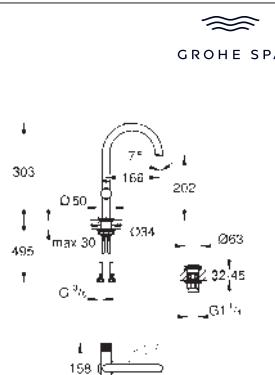

Ref. no.

Colour

| | | |
|---|--|---|
|  GROHE SPA | 21 138 000 21 138 DC0 21 138 GL0 21 138 GN0 21 138 DAO 21 138 DL0 21 138 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|---|--|---|

Atrio Private Collection

Single-hole basin mixer 1/2"

L-Size

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

rapid installation system

swivel tubular spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

knobs with metal inlay

can be combined with 48 456 000 or 48 457 000

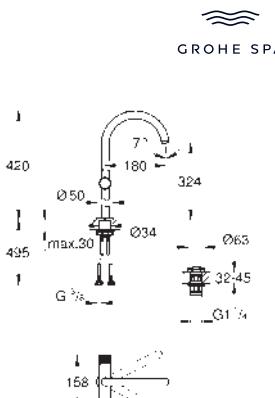

| | | |
|---|--|---|
|  GROHE SPA | 21 142 000 21 142 DC0 21 142 GL0 21 142 GN0 21 142 DAO 21 142 DL0 21 142 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|---|--|---|

Atrio Private Collection

Single-hole basin mixer 1/2"

XL-Size

for free-standing basins

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

rapid installation system

swivel tubular spout with mousseur and stop limiter

adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

knobs with metal inlay

can be combined with 48 456 000 or 48 457 000



48 456 000

Atrio Private Collection

Inlays made from White Attica Caesarstone material

can be combined with Atrio Private Collection:

one-hole basin mixer L-Size 21 138

one-hole basin mixer XL-Size 21 142

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



48 457 000

Atrio Private Collection

Inlays made from Vanilla Noir Caesarstone material

can be combined with Atrio Private Collection:

one-hole basin mixer L-Size 21 138

one-hole basin mixer XL-Size 21 142

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.

Ref. no.

Colour



48 460 000

GROHE SPA

Atrio Private Collection

Inlays made from **White Attica Caesarstone material**

can be combined with Atrio Private Collection:

three-hole basin mixer M-Size 20 595

three-hole basin mixer wall mounted 20 589

bath mixer 25 229

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



48 461 000

GROHE SPA

Atrio Private Collection

Inlays made from **Vanilla Noir Caesarstone material**


can be combined with Atrio Private Collection:

three-hole basin mixer M-Size 20 595

three-hole basin mixer wall mounted 20 589

bath mixer 25 229

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.

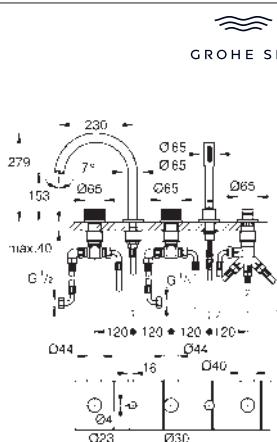

Ref. no.

Colour

| | |
|------------|-----------------------|
| 25 226 000 | chrome |
| 25 226 DCO | supersteel |
| 25 226 GLO | cool sunrise |
| 25 226 GN0 | brushed cool sunrise |
| 25 226 DAO | warm sunset |
| 25 226 DL0 | brushed warm sunset |
| 25 226 AL0 | brushed hard graphite |

Atrio Private Collection

5-hole bath/shower combination

ceramic headparts 1/2", 90°

GROHE Long-Life finish

pre-assembled spout fixing

knobs with inlay, can be combined with 48 462 000 or 48 463 000

bath spout with mousseur and diverter bath/shower

hand shower 6.6 l/min

shower hose 2000 mm

flexible connection hoses

connection for shower hose

protected against backflow

can be used with 29 037

29 037 002

Baseframe for installation under tiled surround



48 462 000

Atrio Private Collection

Inlays made from White Attica Caesarstone material

can be combined with Atrio Private Collection:

tub filler 25 226

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



48 463 000

Atrio Private Collection

Inlays made from Vanilla Noir Caesarstone material

can be combined with Atrio Private Collection:

tub filler 25 226

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.


Ref. no.

Colour



24 396 000
24 396 DC0
24 396 GL0
24 396 GN0
24 396 DAO
24 396 DL0
24 396 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite



Atrio Private Collection

Thermostatic shower mixer for 2 outlets with integrated shut off/diverter valve with knob

final installation for

GROHE Rapido SmartBox (35 604)

GROHE TurboStar compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable printed head and hand shower symbol

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

GROHE AquaDimmer, integrated shut off/diverter valve

knobs with metal inlay

can be combined with 48 466 000 or 48 467 000

outlet B = 27 l/min, outlet C = 30 l/min

without roughing-in-set



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed

installation



48 466 000

Atrio Private Collection

Inlays made from White Attica Caesarstone material

can be combined with Atrio Private Collection:

thermostatic shower mixer 24 396

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



48 467 000

Atrio Private Collection


Inlays made from Vanilla Noir Caesarstone material

can be combined with Atrio Private Collection:

thermostatic shower mixer 24 396

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



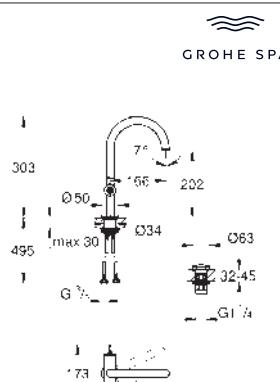

Ref. no.

Colour

| | |
|------------|-----------------------|
| 21 134 000 | chrome |
| 21 134 DC0 | supersteel |
| 21 134 GLO | cool sunrise |
| 21 134 GN0 | brushed cool sunrise |
| 21 134 DAO | warm sunset |
| 21 134 DLO | brushed warm sunset |
| 21 134 AL0 | brushed hard graphite |

Atrio Private Collection

Single-hole basin mixer 1/2"

L-Size

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

rapid installation system

swivel tubular spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

for stick handles

to be combined with stick sets 48 458, 48 459 or 48 646, please order separately

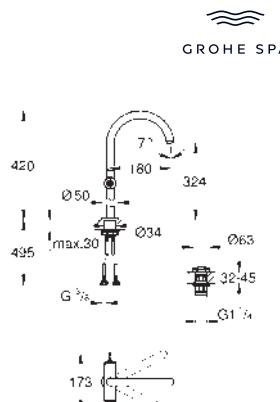

| | |
|------------|-----------------------|
| 21 140 000 | chrome |
| 21 140 DC0 | supersteel |
| 21 140 GLO | cool sunrise |
| 21 140 GN0 | brushed cool sunrise |
| 21 140 DAO | warm sunset |
| 21 140 DLO | brushed warm sunset |
| 21 140 AL0 | brushed hard graphite |

Atrio Private Collection

Single-hole basin mixer 1/2"

XL-Size

for free-standing basins

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

rapid installation system

swivel tubular spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

Push-open waste set 1 1/4"

flexible connection hoses

for stick handles

to be combined with stick sets 48 458, 48 459 or 48 646, please order separately

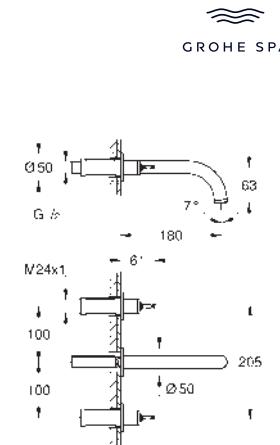

| | |
|------------|-----------------------|
| 20 587 000 | chrome |
| 20 587 DC0 | supersteel |
| 20 587 GLO | cool sunrise |
| 20 587 GN0 | brushed cool sunrise |
| 20 587 DAO | warm sunset |
| 20 587 DLO | brushed warm sunset |
| 20 587 AL0 | brushed hard graphite |

Atrio Private Collection

3-hole wash-basin mixer

M-Size

wall mounted

final installation for

29 025

without concealed body

headparts 1/2" - 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

centre distance 200 mm

projection 180 mm

for stick handles


to be combined with stick sets 48 458, 48 459 or 48 646, please order separately

29 025 002

Rough-in set for 3-hole basin mixer

Ref. no.

Colour

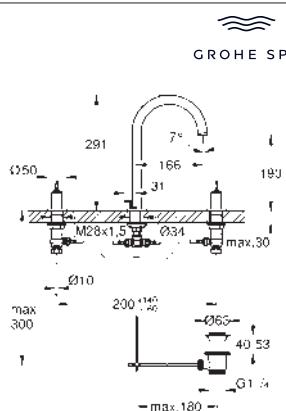

20 593 000
20 593 DC0
20 593 GLO
20 593 GN0
20 593 DAO
20 593 DLO
20 593 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Atrio Private Collection
3-hole basin mixer 1/2"
L-Size

ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min


swivel tubular spout with mousseur and stop limiter

adjustable swivel area 0° / 150° / 360°

pop-up waste set 1 1/4"

flexible connection hoses between spout and side valves

for stick handles
to be combined with stick sets 48 458, 48 459 or 48 646, please order separately

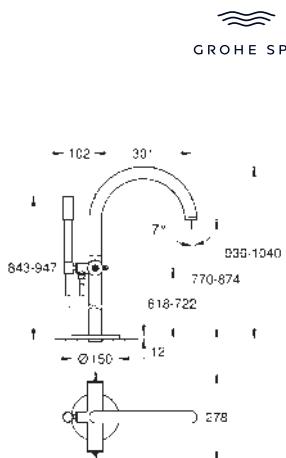

GROHE SPA

25 227 000
25 227 DC0
25 227 GLO
25 227 GN0
25 227 DAO
25 227 DLO
25 227 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Atrio Private Collection
Bath mixer 1/2"
floor-mounted installation

final installation for

45 984

without roughing-in-set

ceramic headparts 1/2", 90°

GROHE Long-Life finish

automatic diverter: bath/shower

projection 301 mm

integrated non-return valve in shower outlet

hand shower with holder

Silverflex shower hose 1.250 mm (28 362)

protected against backflow

for stick handles

to be combined with stick sets 48 646, 48 458 or 48 459, please order separately

45 984 001 chrome
Rough-in set 1/2" for floor-mounted mixers/spouts



GROHE SPA

48 458 000
48 458 DC0
48 458 GLO
48 458 GN0
48 458 DAO
48 458 DLO
48 458 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Atrio Private Collection

Sticks made from White Attica Caesarstone material

can be combined with Atrio Private Collection:

one-hole basin mixer L-Size 21 134

one-hole basin mixer XL-Size 21 140

three-hole basin mixers 20 587 and 20 593

bath mixer 25 227

Sets of caps with „H“ and „C“ marking and without marking

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



Ref. no.

Colour

| | |
|------------|-----------------------|
| 48 459 000 | chrome |
| 48 459 DC0 | supersteel |
| 48 459 GL0 | cool sunrise |
| 48 459 GN0 | brushed cool sunrise |
| 48 459 DAO | warm sunset |
| 48 459 DL0 | brushed warm sunset |
| 48 459 AL0 | brushed hard graphite |

Atrio Private Collection

Sticks made from Vanilla Noir Caesarstone material

can be combined with Atrio Private Collection:

one-hole basin mixer L-Size 21 134

one-hole basin mixer XL-Size 21 140

three-hole basin mixers 20 587 and 20 593

bath mixer 25 227

Sets of caps with „H“ and „C“ marking and without marking

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



| | |
|------------|-----------------------|
| 48 646 000 | chrome |
| 48 646 DC0 | supersteel |
| 48 646 GL0 | cool sunrise |
| 48 646 GN0 | brushed cool sunrise |
| 48 646 DAO | warm sunset |
| 48 646 DL0 | brushed warm sunset |
| 48 646 AL0 | brushed hard graphite |

Atrio Private Collection

Knurled sticks

can be combined with Atrio Private Collection:

one-hole basin mixer L-Size 21 134

one-hole basin mixer XL-Size 21 140

three-hole basin mixers 20 587 and 20 593

bath mixer 25 227

Sets of caps with „H“ and „C“ marking and without marking




Ref. no.

Colour



 GROHE SPA

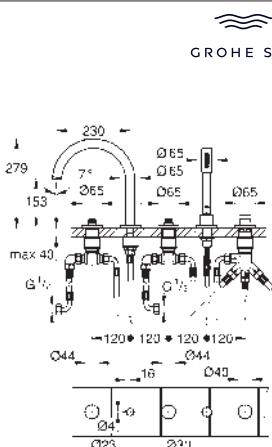

| | |
|------------|-----------------------|
| 25 224 000 | chrome |
| 25 224 DC0 | supersteel |
| 25 224 GL0 | cool sunrise |
| 25 224 GN0 | brushed cool sunrise |
| 25 224 DAO | warm sunset |
| 25 224 DL0 | brushed warm sunset |
| 25 224 AL0 | brushed hard graphite |

Atrio Private Collection

5-hole bath/shower combination

ceramic headparts 1/2", 90°

GROHE Long-Life finish

pre-assembled spout fixing

bath spout with mousseur and diverter bath/shower

hand shower 6.6 l/min

shower hose 2000 mm

flexible connection hoses

connection for shower hose

protected against backflow

for stick handles

to be combined with stick sets 48 464, 48 465 or 48 651, please order separately

can be used with 29 037

29 037 002

Baseframe for installation under tiled surround



 GROHE SPA

| | |
|------------|-----------------------|
| 48 464 000 | chrome |
| 48 464 DC0 | supersteel |
| 48 464 GL0 | cool sunrise |
| 48 464 GN0 | brushed cool sunrise |
| 48 464 DAO | warm sunset |
| 48 464 DL0 | brushed warm sunset |
| 48 464 AL0 | brushed hard graphite |

Atrio Private Collection

Sticks made from White Attica Caesarstone material

can be combined with Atrio Private Collection:

tub filler 25 224

Sets of caps with „H“ and „C“ marking and without marking

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



 GROHE SPA

| | |
|------------|-----------------------|
| 48 465 000 | chrome |
| 48 465 DC0 | supersteel |
| 48 465 GL0 | cool sunrise |
| 48 465 GN0 | brushed cool sunrise |
| 48 465 DAO | warm sunset |
| 48 465 DL0 | brushed warm sunset |
| 48 465 AL0 | brushed hard graphite |

Atrio Private Collection

Sticks made from Vanilla Noir Caesarstone material

can be combined with Atrio Private Collection:

tub filler 25 224

Sets of caps with „H“ and „C“ marking and without marking

Caesarstone is a quartz composite material. Structures and textures on the surface may vary and are unique.



 GROHE SPA

| | |
|------------|-----------------------|
| 48 651 000 | chrome |
| 48 651 DC0 | supersteel |
| 48 651 GL0 | cool sunrise |
| 48 651 GN0 | brushed cool sunrise |
| 48 651 DAO | warm sunset |
| 48 651 DL0 | brushed warm sunset |
| 48 651 AL0 | brushed hard graphite |

Atrio Private Collection

Knurled sticks


can be combined with Atrio Private Collection:

tub filler 25 224

Sets of caps with „H“ and „C“ marking and without marking



GROHE SPA

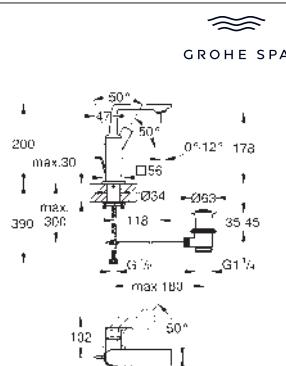
GROHE
ALLURESPA BATH
FAUCETS

Ref. no.

Colour


| | |
|------------|-----------------------|
| 32 757 001 | chrome |
| 32 757 DC1 | supersteel |
| 32 757 GL1 | cool sunrise |
| 32 757 GN1 | brushed cool sunrise |
| 32 757 DA1 | warm sunset |
| 32 757 DL1 | brushed warm sunset |
| 32 757 AL1 | brushed hard graphite |

Allure
Single-lever basin mixer 1/2"
M-Size
 swivelling spout
GROHE SilkMove 28 mm ceramic cartridge
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
 maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation Plus installation system
GROHE AquaGuide adjustable slim air mousseur
 pop-up waste set 1 1/4"
 flexible connection hoses
 temperature limiter

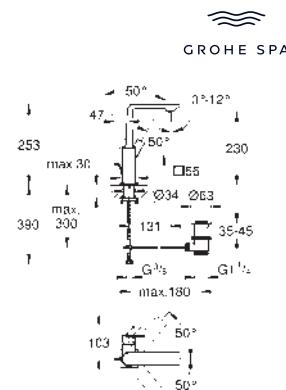

| | |
|------------|-----------------------|
| 32 146 001 | chrome |
| 32 146 DC1 | supersteel |
| 32 146 GL1 | cool sunrise |
| 32 146 GN1 | brushed cool sunrise |
| 32 146 DA1 | warm sunset |
| 32 146 DL1 | brushed warm sunset |
| 32 146 AL1 | brushed hard graphite |

Allure
Single-lever basin mixer 1/2"
L-Size
 swivelling spout
GROHE SilkMove 28 mm ceramic cartridge
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
 maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation Plus installation system
GROHE AquaGuide adjustable slim air mousseur
 pop-up waste set 1 1/4"
 flexible connection hoses
 temperature limiter

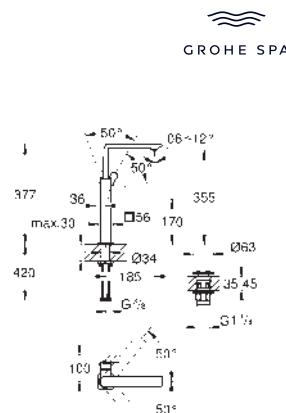


| | |
|------------|-----------------------|
| 23 403 001 | chrome |
| 23 403 DC1 | supersteel |
| 23 403 GL1 | cool sunrise |
| 23 403 GN1 | brushed cool sunrise |
| 23 403 DA1 | warm sunset |
| 23 403 DL1 | brushed warm sunset |
| 23 403 AL1 | brushed hard graphite |

Allure
Single-lever basin mixer 1/2"
XL-Size
 swivelling spout
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge
GROHE Long-Life finish
 maximum flow rate (at 3 bar): 5 l/min
GROHE Water Saving - Less water, perfect flow
 smooth body with push-open pop-up waste set 1 1/4"
GROHE AquaGuide adjustable slim air mousseur
 projection 185 mm
 height 377 mm
 push-to-open waste set
 flexible connection hoses
 temperature limiter



GROHE SPA

GROHE ALLURE

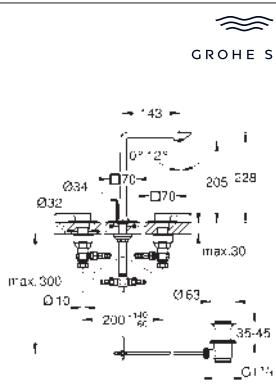

Ref. no.


Colour

20 188 001
20 188 DC1
20 188 GL1
20 188 GN1
20 188 DA1
20 188 DL1
20 188 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure
3-hole basin mixer 1/2"
M-Size

with lever handles
deck mounted
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable slim air mousseur
projection 143 mm
flexible connection hoses between spout and side valves
pop-up waste set 1 1/4"



20 189 002
20 189 DC2
20 189 GL2
20 189 GN2
20 189 DA2
20 189 DL2
20 189 AL2

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure
3-hole basin mixer 1/2"
S-Size

wall mounted
with lever handles
without concealed body
final installation for 29 025
headparts 1/2" - 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
Precision Control with haptic click feedback (optional)
GROHE AquaGuide adjustable slim air mousseur
centre distance 200 mm
projection 150 mm

20 193 002
20 193 DC2
20 193 GL2
20 193 GN2
20 193 DA2
20 193 DL2
20 193 AL2


chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite
ditto, projection 208 mm

29 025 002
Rough-in set for 3-hole basin mixer



GROHE SPA

GROHE ALLURE



GROHE SPA

Ref. no.

Colour

| | |
|------------|-----------------------|
| 19 309 002 | chrome |
| 19 309 DC2 | supersteel |
| 19 309 GL2 | cool sunrise |
| 19 309 GN2 | brushed cool sunrise |
| 19 309 DA2 | warm sunset |
| 19 309 DL2 | brushed warm sunset |
| 19 309 AL2 | brushed hard graphite |

Allure**2-hole basin mixer****S-Size**

wall mounted
without concealed body
final installation for 23 429

GROHE FeatherControl Joystick cartridge

GROHE Long-Life finish


GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/minGROHE AquaGuide adjustable slim air mousseur
centre distance 110 mm
projection 154 mm

| | |
|------------|-----------------------|
| 19 386 002 | chrome |
| 19 386 DC2 | supersteel |
| 19 386 GL2 | cool sunrise |
| 19 386 GN2 | brushed cool sunrise |
| 19 386 DA2 | warm sunset |
| 19 386 DL2 | brushed warm sunset |
| 19 386 AL2 | brushed hard graphite |

ditto, projection 212 mm

23 429 000

Rough-in for Joystick 2-hole basin mixers



GROHE SPA

| | |
|------------|-----------------------|
| 24 160 001 | chrome |
| 24 160 DC1 | supersteel |
| 24 160 GL1 | cool sunrise |
| 24 160 GN1 | brushed cool sunrise |
| 24 160 DA1 | warm sunset |
| 24 160 DL1 | brushed warm sunset |
| 24 160 AL1 | brushed hard graphite |

Allure**Single-lever bidet mixer 1/2"**


GROHE SilkMove 28 mm ceramic cartridge

GROHE Long-Life finish

ball-joint mousseur

pop-up waste set 1 1/4"

flexible connection hoses



GROHE SPA

| | |
|------------|-----------------------|
| 32 846 001 | chrome |
| 32 846 DC1 | supersteel |
| 32 846 GL1 | cool sunrise |
| 32 846 GN1 | brushed cool sunrise |
| 32 846 DA1 | warm sunset |
| 32 846 DL1 | brushed warm sunset |
| 32 846 AL1 | brushed hard graphite |

Allure**Single-lever shower mixer 1/2" exposed**

wall mounted

GROHE SilkMove 35 mm ceramic cartridge

GROHE Long-Life finish

adjustable flow rate limiter

shower bottom outlet with integrated non return-valve


covered S-unions

protected against backflow



GROHE SPA

GROHE ALLURE

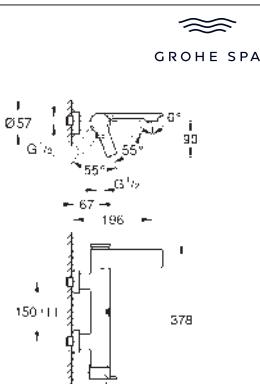


Ref. no.

Colour

| | | |
|------------------|--|---|
| GROHE SPA | 32 826 001 32 826 DC1 32 826 GL1 32 826 GN1 32 826 DA1 32 826 DL1 32 826 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|------------------|--|---|

Allure

Single-lever bath mixer 1/2" exposed wall mounted
GROHE SilkMove 35 mm ceramic cartridge
GROHE Long-Life finish
 adjustable flow rate limiter
 automatic diverter: bath/shower
 cast spout
 mousseur
 shower bottom outlet with integrated non return-valve
 covered S-unions
 protected against backflow




| | | |
|------------------|--|---|
| GROHE SPA | 19 317 001 19 317 DC1 19 317 GL1 19 317 GN1 19 317 DA1 19 317 DL1 19 317 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|------------------|--|---|

Allure

Single-lever shower mixer
 final installation for GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
 outlet B or C = 30 l/min
 without roughing-in-set



35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



| | | |
|------------------|--|---|
| GROHE SPA | 19 315 001 19 315 DC1 19 315 GL1 19 315 GN1 19 315 DA1 19 315 DL1 19 315 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|------------------|--|---|

Allure

Single-lever mixer with 2-way diverter
 final installation for GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
 automatic 2-way diverter
 outlet B = 27 l/min, outlet C = 27 l/min
 without roughing-in-set




35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



GROHE SPA

GROHE ALLURE

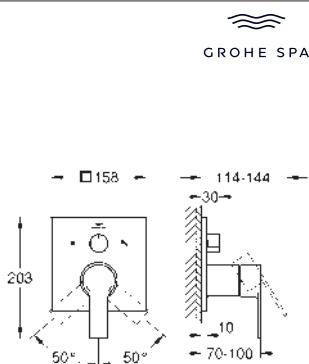

Ref. no.

Colour



29 176 001
29 176 DC1
29 176 GL1
29 176 GN1
29 176 DA1
29 176 DL1
29 176 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure

Single-lever mixer with 3-way diverter
final installation for GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish


GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

3-way diverter

outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min
without roughing-in-set

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



19 380 002
19 380 DC2
19 380 GL2
19 380 GN2
19 380 DA2
19 380 DL2
19 380 AL2

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure

Safety mixer for concealed installation with one valve
final installation for

GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers

ceramic stop valve, 120°


metal handles

outlet B = 27 l/min, outlet C = 30 l/min

without roughing-in-set

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



29 181 002
29 181 DC2
29 181 GL2
29 181 GN2
29 181 DA2
29 181 DL2
29 181 AL2

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure

Thermostat for concealed installation with 2-way diverter head shower/hand shower
final installation for

GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

printed head and hand shower symbol

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

GROHE AquaDimmer, integrated shut off/diverter valve

metal handles


outlet B = 27 l/min, outlet C = 30 l/min

without roughing-in-set

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation

Ref. no. Colour



| | |
|------------|-----------------------|
| 19 446 002 | chrome |
| 19 446 DC2 | supersteel |
| 19 446 GL2 | cool sunrise |
| 19 446 GN2 | brushed cool sunrise |
| 19 446 DA2 | warm sunset |
| 19 446 DL2 | brushed warm sunset |
| 19 446 AL2 | brushed hard graphite |


Allure

Thermostat for concealed installation with 2-way diverter hand shower/bath filler
final installation for
GROHE Rapido SmartBox (35 604)
GROHE TurboStar compact cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
printed hand shower and bath filler symbol
GROHE SafeStop safety button at 38°C
GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
GROHE AquaDimmer, integrated shut off/diverter valve
metal handles
outlet B = 27 l/min, outlet C = 30 l/min
without roughing-in-set



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation

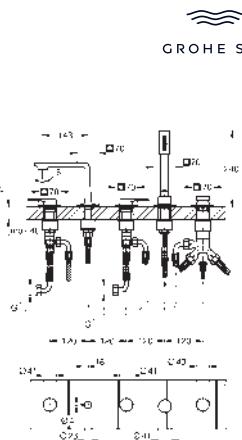


| | |
|------------|-----------------------|
| 25 221 001 | chrome |
| 25 221 DC1 | supersteel |
| 25 221 GL1 | cool sunrise |
| 25 221 GN1 | brushed cool sunrise |
| 25 221 DA1 | warm sunset |
| 25 221 DL1 | brushed warm sunset |
| 25 221 AL1 | brushed hard graphite |

Allure

5-hole bath/shower combination
for installation under tiled surround
ceramic headparts 1/2", 90°
GROHE Long-Life finish
pre-assembled spout fixing
with lever handles
bath spout with mousseur and diverter bath/shower
Rainshower Aqua hand shower 6.6 l/min
shower hose 2000 mm
flexible connection hoses
connection for shower hose
protected against backflow
optional baseframe for installation 29 037 002

29 037 002

Baseframe for installation under tiled surround

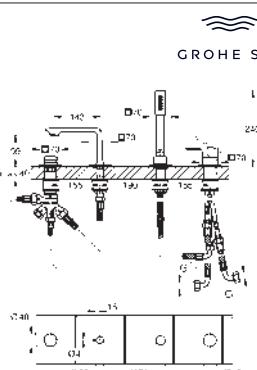

| | |
|------------|-----------------------|
| 19 316 001 | chrome |
| 19 316 DC1 | supersteel |
| 19 316 GL1 | cool sunrise |
| 19 316 GN1 | brushed cool sunrise |
| 19 316 DA1 | warm sunset |
| 19 316 DL1 | brushed warm sunset |
| 19 316 AL1 | brushed hard graphite |

Allure

4-hole bath combination
for installation under tiled surround
GROHE Long-Life finish
single lever mixer operating element
diverter bath/shower
Rainshower Aqua hand shower 6.6 l/min
shower hose 2000 mm
optional baseframe for installation 29 037 002

29 037 002

Baseframe for installation under tiled surround




GROHE SPA

GROHE
ALLURESPA BATH
FAUCETS

Ref. no.

Colour

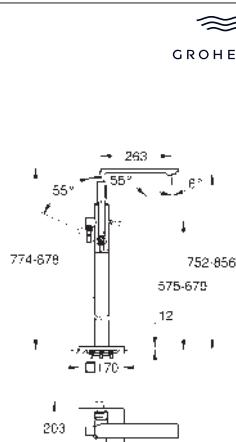

GROHE SPA


25 222 001
25 222 DC1
25 222 GL1
25 222 GN1
25 222 DA1
25 222 DL1
25 222 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure

Single-lever bath mixer 1/2", floor mounted
final installation for
45 984
without roughing-in-set
GROHE SilkMove 35 mm ceramic cartridge
GROHE Long-Life finish
automatic diverter: bath/shower
spout with mousseur
projection 263 mm
integrated non-return valve in shower outlet
with shower holder
Rainshower Aqua hand shower 6.6 l/min
shower hose 1250 mm
protected against backflow

45 984 001
Rough-in set 1/2" for floor-mounted mixers/spouts




GROHE SPA

13 264 001
13 264 DC1
13 264 GL1
13 264 GN1
13 264 DA1
13 264 DL1
13 264 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure

Bath spout 3/4"
wall mounted
GROHE Long-Life finish
projection 167 mm
caché mousseur



GROHE SPA

19 590 001
19 590 DC1
19 590 GL1
19 590 GN1
19 590 DA1
19 590 DL1
19 590 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure


5-way diverter
final installation for 29 033
without concealed body
bayonet union escutcheon
installation depth infinitely adjustable
66 - 113 mm
GROHE Long-Life finish

29 033 000
Concealed body for 5-way diverter



GROHE SPA

GROHE
ALLURE



Ref. no.

Colour

GROHE SPA

19 334 001
19 334 DC1
19 334 GL1
19 334 GN1
19 334 DA1
19 334 DL1
19 334 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure

Concealed valve exposed part

for concealed valve 35 028 or 29 032

GROHE Long-Life finish

installation depth infinitely adjustable

20-80 mm

escutcheon with screwable wall sealing

with lever handle

35 028 000

GROHE Rapido C rough-in box for single volume control

29 032 000

Concealed valve, pre-assembled head part 1/2"




GROHE SPA

GROHE ALLURE

SPA BATH
FAUCETS


Ref. no. Colour



40 278 001 chrome
 40 278 DC1 supersteel
 40 278 GL1 cool sunrise
 40 278 GN1 brushed cool sunrise
 40 278 DA1 warm sunset
 40 278 DL1 brushed warm sunset
 40 278 AL1 brushed hard graphite

Allure**Holder**


fits glass 40 882 000 or soap dispenser 40 886 xx0 (please order separately)
 material: metal
 concealed fastening
 GROHE Long-Life finish



40 886 000 chrome
 40 886 DC0 supersteel
 40 886 GL0 cool sunrise
 40 886 GN0 brushed cool sunrise
 40 886 DA0 warm sunset
 40 886 DL0 brushed warm sunset
 40 886 A00 hard graphite
 40 886 AL0 brushed hard graphite

Soap dispenser

material: glass / metal
 filling quantity 160 ml
 fits holder Atrio 40 884 xx0 (please order separately)




40 882 000

chrome

Glass


material: glass
 fits holders Allure 40 278 001 and Atrio 40 884 xx0 (please order separately)



40 963 001 chrome
 40 963 DC1 supersteel
 40 963 GL1 cool sunrise
 40 963 GN1 brushed cool sunrise
 40 963 DA1 warm sunset
 40 963 DL1 brushed warm sunset
 40 963 AL1 brushed hard graphite

Allure**Holder**

for soap dish 40 883 00 or hair dryer inlet 40 964 001 (please order separately)
 material: metal
 concealed fastening
 GROHE Long-Life finish



40 883 000

chrome

Soap dish

material: glass
 fits holders Allure (40 963 001) and Atrio (40 885 xx0), please order separately



GROHE SPA

GROHE
ALLURE

| | Ref. no. | Colour |
|---|---|---|
|  | 40 964 001 Allure Hair dryer inlet material: plastic fits holders Allure (40 963 xx1) and Atrio (40 885 xx0), please order separately | chrome/frosted granite |
|  | 40 284 001 40 284 DC1 40 284 GL1 40 284 GN1 40 284 DA1 40 284 DL1 40 284 AL1 Allure Bathrobe hook material: metal concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|  | 40 342 001 40 342 DC1 40 342 GL1 40 342 GN1 40 342 DA1 40 342 DL1 40 342 AL1 Allure Double towel bar material: metal pivotable 90° length 460 mm concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|  | 40 341 001 40 341 DC1 40 341 GL1 40 341 GN1 40 341 DA1 40 341 DL1 40 341 AL1 Allure Towel holder center distance 569 mm material: metal concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
|  | 40 339 001 40 339 DC1 40 339 GL1 40 339 GN1 40 339 DA1 40 339 DL1 40 339 AL1 Allure Towel ring material: metal concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |




GROHE SPA

GROHE
ALLURESPA BATH
FAUCETS

Ref. no.


Colour



40 955 001
40 955 DC1
40 955 GL1
40 955 GN1
40 955 DA1
40 955 DL1
40 955 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite


Allure
Grab rail
material: metal
concealed fastening
center distance 269 mm
GROHE Long-Life finish



40 279 001
40 279 DC1
40 279 GL1
40 279 GN1
40 279 DA1
40 279 DL1
40 279 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite


Allure
Toilet paper holder
without cover
material: metal
concealed fastening
GROHE Long-Life finish



40 956 001
40 956 DC1
40 956 GL1
40 956 GN1
40 956 DA1
40 956 DL1
40 956 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite


Allure
Spare toilet paper holder
without cover
material: metal
concealed fastening
GROHE Long-Life finish



40 340 001
40 340 DC1
40 340 GL1
40 340 GN1
40 340 DA1
40 340 DL1
40 340 AL1

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure
Toilet brush set
wall mounted
concealed fastening
material: glass / metal
GROHE Long-Life finish



40 965 001


chrome

Allure
Shelf
wall mounted
material: glass / metal
concealed fastening
width 600 mm
depth 100 mm
GROHE Long-Life finish



GROHE SPA

GROHE
ALLURE



Ref. no.

Colour

GROHE SPA

40 967 001
40 967 DC1
40 967 GL1
40 967 GN1
40 967 DA1
40 967 DL1
40 967 AL1


chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
brushed hard graphite

Allure
Beauty / shaving mirror
wall mounted
magnification: x 7
material: glass / metal
concealed fastening
GROHE Long-Life finish

GROHE ALLURE BRILLIANT

Ref. no.

Colour

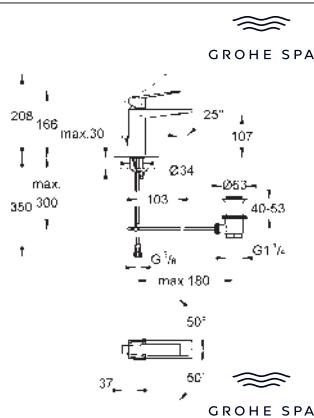

24 341 000
24 341 DC0
24 341 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant
Single-lever basin mixer 1/2"
M-Size

GROHE SilkMove 28 mm ceramic cartridge
temperature limiter


GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

GROHE FastFixation installation system
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses

24 342 000
24 342 DC0
24 342 AL0

chrome
supersteel
brushed hard graphite
ditto, smooth body

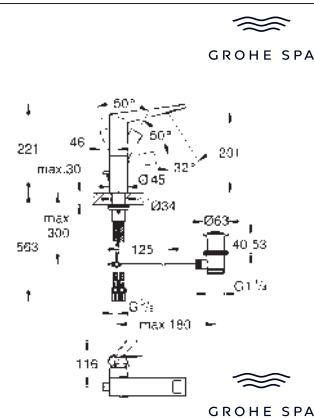

24 344 000
24 344 DC0
24 344 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant
Single-lever basin mixer 1/2"
L-Size

GROHE SilkMove 28 mm ceramic cartridge
temperature limiter


GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

GROHE FastFixation installation system
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses

24 345 000
24 345 DC0
24 345 AL0

chrome
supersteel
brushed hard graphite
ditto, smooth body

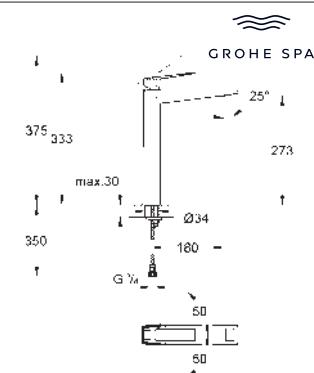

24 346 000
24 346 DC0
24 346 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant
Single-lever basin mixer 1/2"
XL-Size


for free-standing basins

GROHE SilkMove 28 mm ceramic cartridge
temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

GROHE FastFixation installation system
spout with integrated mousseur
smooth body
flexible connection hoses

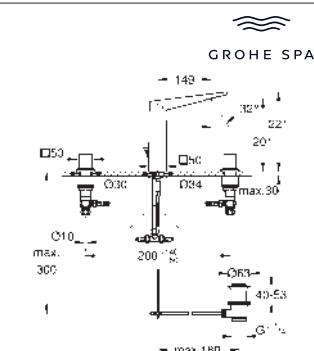

20 627 000
20 627 DC0
20 627 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant
3-hole basin mixer 1/2"
L-Size


ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves


Colour



Ref. no.

20 626 000
20 626 DC0
20 626 AL0
chrome
supersteel
brushed hard graphite

Allure Brilliant
3-hole basin mixer 1/2"
M-Size
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
low spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves

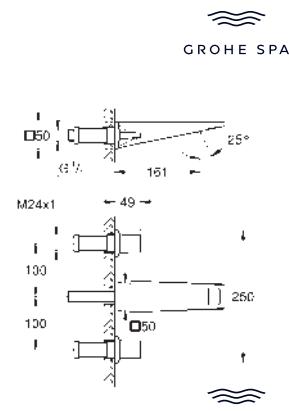


20 628 000
20 628 DC0
20 628 AL0
chrome
supersteel
brushed hard graphite

Allure Brilliant
3-hole basin mixer 1/2"
M-Size
wall mounted
without concealed body
final installation for 29 025
headparts 1/2" - 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
centre distance 200 mm
projection 161 mm

20 629 000
20 629 DC0
20 629 AL0
ditto, projection 210 mm
chrome
supersteel
brushed hard graphite


29 025 002
Rough-in set for 3-hole basin mixer



29 402 000
29 402 DC0
29 402 AL0
chrome
supersteel
brushed hard graphite

Allure Brilliant
2-hole basin mixer
M-Size
wall mounted
without concealed body
final installation for 23 200
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
centre distance 110 mm
projection 161 mm

23 200 002
Rough-in for single-lever mixer, wall mount

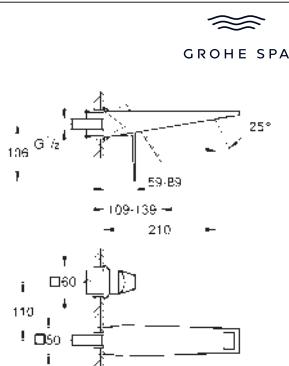


29 403 000
29 403 DC0
29 403 AL0
chrome
supersteel
brushed hard graphite

Allure Brilliant
2-hole basin mixer
L-Size
wall mounted
without concealed body
final installation for
23 200
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
centre distance 110 mm
projection 210 mm

23 200 002
Rough-in for single-lever mixer, wall mount

Ref. no.

Colour


 24 347 000
24 347 DC0
24 347 AL0

 chrome
supersteel
brushed hard graphite

Allure Brilliant
Single-lever bidet mixer 1/2"
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE FastFixation installation system
ball-joint mousseur
pop-up waste set 1 1/4"
flexible connection hoses


 24 277 000
24 277 DC0
24 277 AL0

 chrome
supersteel
brushed hard graphite

Allure Brilliant
Single-lever shower mixer
final installation for GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
metal lever
outlet B or C = 30 l/min



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation


 24 279 000
24 279 DC0
24 279 AL0

 chrome
supersteel
brushed hard graphite

Allure Brilliant
Single-lever mixer with 2-way diverter
final installation for GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation


 24 340 000
24 340 DC0
24 340 AL0

 chrome
supersteel
brushed hard graphite

Allure Brilliant
Single-lever mixer with 3-way diverter
final installation for GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
3-way diverter
outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min




35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation

Ref. no.

Colour

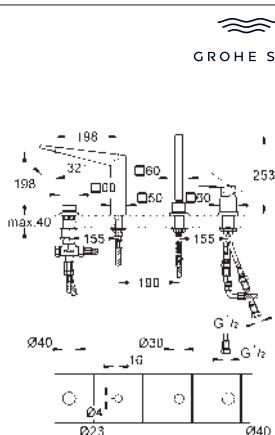

29 405 000
29 405 DC0
29 405 AL0

chrome
supersteel
brushed hard graphite


Allure Brilliant

4-hole bath combination

GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
pre-assembled spout fixing
single lever mixer operating element
bath spout with integrated mousseur
diverter bath/shower
hand shower Rainshower Aqua Cube Stick 6.5 l/min
metal shower hose 2000 mm (always chrome for any colour of the set)
flexible connection hoses
connection for shower hose
protected against backflow
for use with 29 037

29 037 000
Baseframe for installation under tiled surround

45 388 000
Supporting legs for baseframe

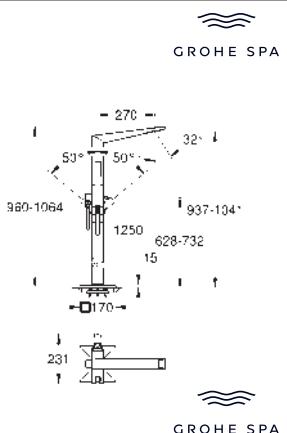

24 348 000
24 348 DC0
24 348 AL0

chrome
supersteel
brushed hard graphite


Allure Brilliant

Single-lever bath mixer 1/2", floor mounted
final installation for 29 086 / 45 984
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
automatic diverter: bath/shower
spout with integrated mousseur
projection 270 mm
integrated non-return valve in shower outlet
with shower holder
hand shower Rainshower Aqua Cube Stick
metal shower hose 1250 mm
protected against backflow

24 348 001
ditto, hand shower with 6.5 l/min flow limiter

45 984 001
Rough-in set 1/2" for floor-mounted mixers/spouts

29 086 000
Rough-in set 1/2" for floor-mounted mixers/spouts




13 486 000
13 486 DC0
13 486 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant

Cascade spout for bath and shower
wall mounted
GROHE Long-Life finish
projection 180 mm




13 485 000
13 485 DC0
13 485 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant

Bath spout
wall mounted
GROHE Long-Life finish
projection 161 mm
spout with integrated mousseur


Ref. no. Colour



29 399 000
29 399 DC0
29 399 AL0
chrome
supersteel
brushed hard graphite

Allure Brilliant
5-way diverter
final installation for 29 033
GROHE Long-Life finish
installation depth infinitely adjustable
66 - 113 mm

29 033 000
Concealed body for 5-way diverter



29 398 000
29 398 DC0
29 398 AL0
chrome
supersteel
brushed hard graphite


Allure Brilliant
Concealed valve exposed part
final installation for 29 032 000, 35 028 000
GROHE Long-Life finish
installation depth infinitely adjustable
43 - 91 mm

29 032 000
Concealed valve, pre-assembled head part 1/2"

35 028 000
GROHE Rapido C rough-in box for single volume control

Ref. no.


Colour



40 894 000

chrome


Allure Brilliant
Holder with soap dispenser
material: glass / metal
filling quantity 150 ml
concealed fastening
GROHE Long-Life finish



40 893 000

chrome

Allure Brilliant
Holder with tumbler
material: glass / metal
concealed fastening
GROHE Long-Life finish



40 895 000

chrome


Allure Brilliant
Towel holder
2 arms, not pivotable
length 431 mm
concealed fastening
GROHE Long-Life finish



40 896 000

chrome


Allure Brilliant
Towel holder
650 mm (drilling length 600 mm)
material: metal
concealed fastening
GROHE Long-Life finish



40 897 000

chrome

Allure Brilliant
Bathrobe hook
material: metal
concealed fastening
GROHE Long-Life finish




40 898 000

chrome

Allure Brilliant
Toilet paper holder
without cover
material: metal
concealed fastening
GROHE Long-Life finish


Ref. no.

Colour

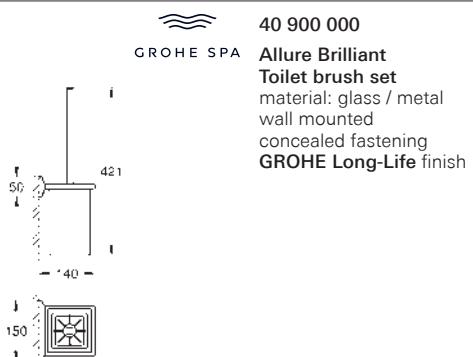

Ref. no.


Colour

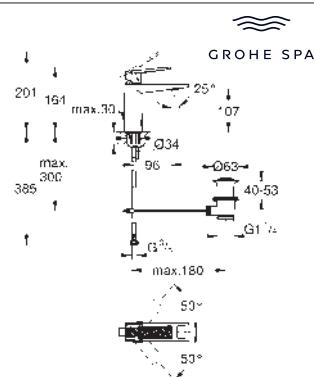

24 397 000
24 397 DC0
24 397 AL0

chrome
supersteel
brushed hard graphite


Allure Brilliant Private Collection
Single-lever basin mixer 1/2"
M-Size
knurled lever
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses

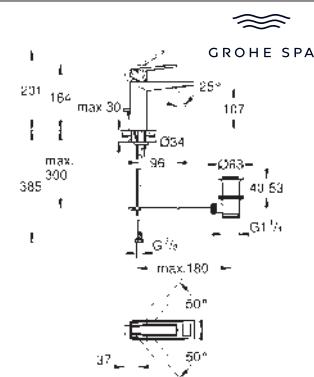

24 398 000
24 398 DC0
24 398 AL0

chrome
supersteel
brushed hard graphite


Allure Brilliant Private Collection
Single-lever basin mixer 1/2"
M-Size
lever with white Caesarstone inlay
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses

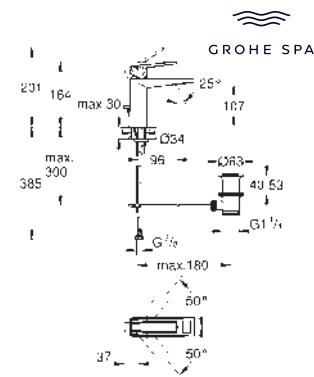

24 399 000
24 399 DC0
24 399 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
Single-lever basin mixer 1/2"
M-Size
lever with black Caesarstone inlay
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses

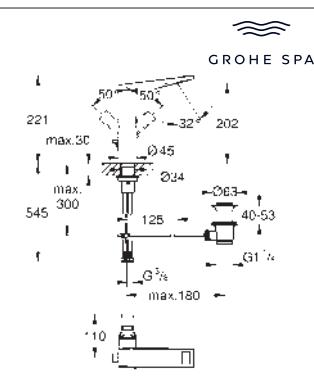


24 400 000
24 400 DC0
24 400 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
Single-lever basin mixer 1/2"
L-Size
knurled lever
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses

Ref. no.

Colour

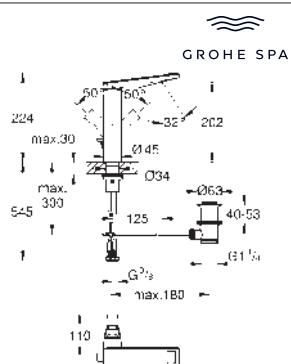

 24 408 000
 24 408 DCO
 24 408 AL0

 chrome
 supersteel
 brushed hard graphite

 Allure Brilliant Private Collection
 Single-lever basin mixer 1/2"

L-Size

spout with White Attica Caesarstone inlay
GROHE SilkMove 28 mm ceramic cartridge temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
 spout with integrated mousseur
 pop-up waste set 1 1/4"
 flexible connection hoses

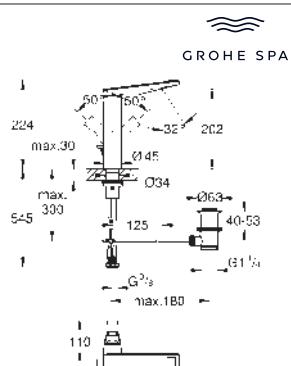

 24 414 000
 24 414 DCO
 24 414 AL0

 chrome
 supersteel
 brushed hard graphite

 Allure Brilliant Private Collection
 Single-lever basin mixer 1/2"

L-Size

spout with Vanilla Noir Caesarstone inlay
GROHE SilkMove 28 mm ceramic cartridge temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
 spout with integrated mousseur
 pop-up waste set 1 1/4"
 flexible connection hoses



 24 417 000
 24 417 DCO
 24 417 AL0

 chrome
 supersteel
 brushed hard graphite

 Allure Brilliant Private Collection
 Single-lever basin mixer 1/2"

XL-Size

knurled lever
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
 spout with integrated mousseur
 smooth body
 flexible connection hoses

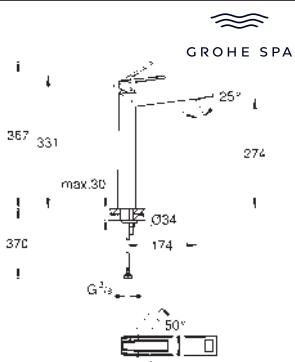
 24 418 000
 24 418 DCO
 24 418 AL0

 chrome
 supersteel
 brushed hard graphite

 Allure Brilliant Private Collection
 Single-lever basin mixer 1/2"


XL-Size

lever with white Caesarstone inlay
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
 spout with integrated mousseur
 smooth body
 flexible connection hoses

ALLURE BRILLIANT PRIVATE COLLECTION

Ref. no.


Colour

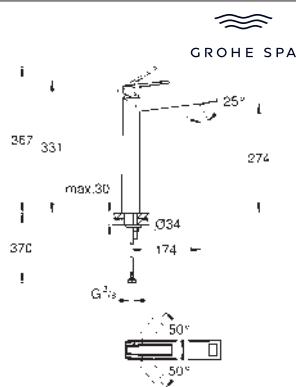

24 419 000
24 419 DC0
24 419 AL0

chrome
supersteel
brushed hard graphite


Allure Brilliant Private Collection
Single-lever basin mixer 1/2"
XL-Size
lever with black Caesarstone inlay
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
spout with integrated mousseur
smooth body
flexible connection hoses

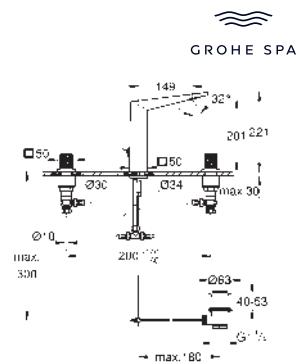

20 667 000
20 667 DC0
20 667 AL0

chrome
supersteel
brushed hard graphite


Allure Brilliant Private Collection
3-hole basin mixer 1/2"
L-Size
knurled trapeze handles
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves

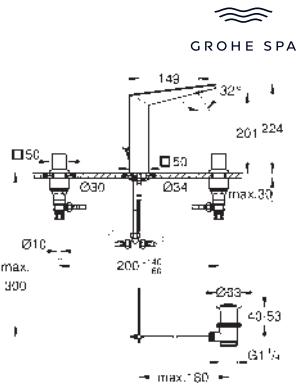

20 668 000
20 668 DC0
20 668 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
3-hole basin mixer 1/2"
L-Size
white Caesarstone trapeze handles
spout with White Attica Caesarstone inlay
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves

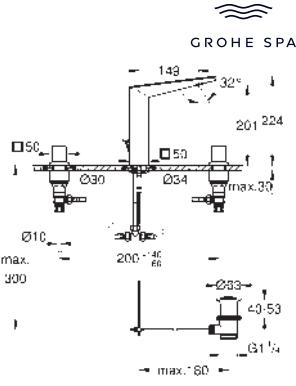


20 669 000
20 669 DC0
20 669 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
3-hole basin mixer 1/2"
L-Size
black Caesarstone trapeze handles
spout with Vanilla Noir Caesarstone inlay
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves


Ref. no.

Colour




20 670 000
20 670 DC0
20 670 AL0
**chrome
supersteel
brushed hard graphite**

**Allure Brilliant Private Collection
3-hole basin mixer 1/2"**
L-Size
knurled knob handles
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves




20 671 000
20 671 DC0
20 671 AL0
**chrome
supersteel
brushed hard graphite**

**Allure Brilliant Private Collection
3-hole basin mixer 1/2"**
L-Size
white Caesarstone knob handles
spout with White Attica Caesarstone inlay
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves



20 672 000
20 672 DC0
20 672 AL0
**chrome
supersteel
brushed hard graphite**

**Allure Brilliant Private Collection
3-hole basin mixer 1/2"**
L-Size
Vanilla Noir Caesarstone knob handles
spout with Vanilla Noir Caesarstone inlay
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves




29 517 000
29 517 DC0
29 517 AL0
**chrome
supersteel
brushed hard graphite**

**Allure Brilliant Private Collection
2-hole basin mixer**
M-Size
knurled handle
wall mounted
without concealed body
final installation for
23 200
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
centre distance 110 mm
projection 210 mm

23 200 002
Rough-in for single-lever mixer, wall mount

Ref. no.

Colour

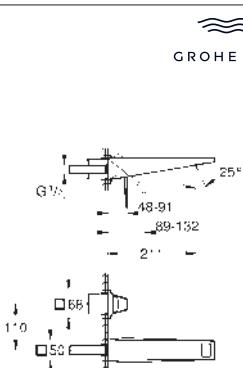

 GROHE SPA

29 519 000
29 519 DC0
29 519 AL0


chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
2-hole basin mixer
M-Size

white Caesarstone handle
spout with White Attica Caesarstone inlay
wall mounted
without concealed body
final installation for
23 200

GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
centre distance 110 mm
projection 210 mm

23 200 002
Rough-in for single-lever mixer, wall mount



 GROHE SPA

29 521 000
29 521 DC0
29 521 AL0


chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
2-hole basin mixer
M-Size

black Caesarstone handle
spout with Vanilla Noir Caesarstone inlay
wall mounted
without concealed body
final installation for
23 200

GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
spout with integrated mousseur
centre distance 110 mm
projection 210 mm

23 200 002
Rough-in for single-lever mixer, wall mount



 GROHE SPA

24 425 000
24 425 DC0
24 425 AL0


chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
Single-lever mixer with 2-way diverter
knurled handle

final installation for GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



 GROHE SPA

24 426 000
24 426 DC0
24 426 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
Single-lever mixer with 2-way diverter
white Caesarstone handle

final installation for GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation

Ref. no.

Colour


 24 427 000
 24 427 DC0
 24 427 AL0

 chrome
 supersteel
 brushed hard graphite

Allure Brilliant Private Collection
Single-lever mixer with 2-way diverter
 black Caesarstone handle
 final installation for GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
 automatic 2-way diverter
 outlet B = 27 l/min, outlet C = 27 l/min

 35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation

 29 523 000
 29 523 DC0
 29 523 AL0

 chrome
 supersteel
 brushed hard graphite

Allure Brilliant Private Collection
4-hole bath combination
 knurled handle

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

 pre-assembled spout fixing
 single lever mixer operating element
 bath spout with integrated mousseur
 diverter bath/shower
 hand shower Rainshower Aqua Cube Stick
 metal shower hose 2000 mm (always chrome for any colour of the set)
 flexible connection hoses
 connection for shower hose
 protected against backflow
 for use with 29 037

 29 037 000
Baseframe for installation under tiled surround

 45 388 000
Supporting legs for baseframe

 29 525 000
 29 525 DC0
 29 525 AL0

 chrome
 supersteel
 brushed hard graphite

Allure Brilliant Private Collection
4-hole bath combination
 white Caesarstone handle

spout with White Attica Caesarstone inlay

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

 pre-assembled spout fixing
 single lever mixer operating element
 bath spout with integrated mousseur
 diverter bath/shower
 hand shower Rainshower Aqua Cube Stick
 metal shower hose 2000 mm (always chrome for any colour of the set)
 flexible connection hoses
 connection for shower hose
 protected against backflow
 for use with 29 037


 29 037 000
Baseframe for installation under tiled surround

 45 388 000
Supporting legs for baseframe



GROHE
ALLURE BRILLIANT PRIVATE COLLECTION

SPA BATH
FAUCETS

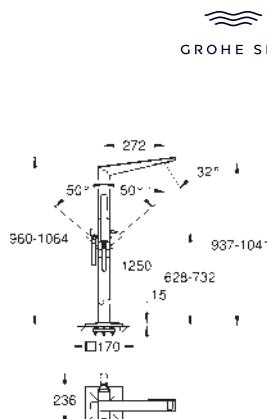

Ref. no.

Colour

24 424 000
24 424 DC0
24 424 AL0

chrome
supersteel
brushed hard graphite

Allure Brilliant Private Collection
Single-lever bath mixer 1/2", floor mounted

black Caesarstone handle
spout with Vanilla Noir Caesarstone inlay
final installation for 29 086 / 45 984

GROHE SilkMove 46 mm ceramic cartridge

**GROHE SilkMove 40 mm
GROHE Long-Life finish**

automatic diverter: bath/shower

automatic diverter bath/shower
spout with integrated mousseur

projection 270 mm

integrated non-return valve in shower outlet

with shower holder

hand shower Rainshower Aqua Cube Stick
1650

metal shower hose 1250 mm

protected against backflow

17.224.224


45 984 001

45 984 001 chrome
Rough-in set 1/2" for floor-mounted mixers/spouts

29 086 000

chrome

Rough-in set 1/2" for floor-mounted mixers/spouts

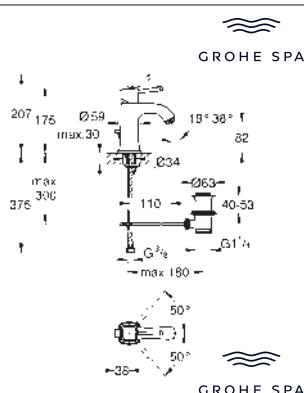


Ref. no. Colour

24 369 000 chrome
24 369 IGO chrome/gold


Grandera
Single-lever basin mixer 1/2"
M-Size
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
GROHE AquaGuide adjustable mousseur
pop-up waste set 1 1/4"
flexible connection hoses

24 370 000 chrome
24 370 IGO chrome/gold
ditto, smooth body

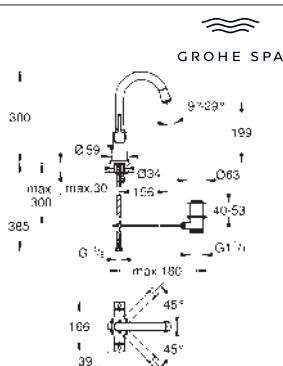


20 666 000 chrome
20 666 IGO chrome/gold

Grandera
Two-handle basin mixer, 1/2" L-Size
headparts 1/2" - 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
swivel spout
pop-up waste set 1 1/4"
flexible connection hoses




24 371 000 chrome
24 371 IGO chrome/gold

Grandera
Single-lever basin mixer 1/2"
XL-Size
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
GROHE AquaGuide adjustable mousseur
smooth body
flexible connection hoses



20 624 000 chrome
20 624 IGO chrome/gold

Grandera
3-hole basin mixer 1/2"
M-Size
headparts 1/2" - 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves



20 619 000 chrome
20 619 IGO chrome/gold

Grandera
3-hole basin mixer 1/2"
L-Size
headparts 1/2" - 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves



Ref. no.

Colour

20 622 000
20 622 IGO
chrome
chrome/gold

Grandera
3-hole basin mixer 1/2"
M-Size
wall mounted
final installation for 29 025
without concealed body
headparts 1/2" - 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
centre distance 200 mm
projection 177 mm

20 623 000
20 623 IGO
ditto, projection 234 mm
chrome
chrome/gold

29 025 002
Rough-in set for 3-hole basin mixer




29 416 000
29 416 IGO
chrome
chrome/gold

Grandera
2-hole basin mixer
M-Size
wall mounted
final installation for 23 319
without concealed body
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 177 mm


29 417 000
29 417 IGO
ditto, projection 234 mm
chrome
chrome/gold

23 319 000
Rough-in set for 2 hole basin mixers, wall installation




24 372 000
24 372 IGO
chrome
chrome/gold

Grandera
Single-lever bidet mixer 1/2"
GROHE SilkMove 28 mm ceramic cartridge
temperature limiter
GROHE Long-Life finish
GROHE FastFixation installation system
ball-joint mousseur
pop-up waste set 1 1/4"
flexible connection hoses



24 373 000
24 373 IGO
chrome
chrome/gold

Grandera
Single-lever shower mixer 1/2"
wall mounted
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
integrated hand shower holder
1/2" shower outlet
integrated non-return valve
covered S-unions
protected against backflow



Ref. no.

Colour

24 374 000
24 374 IGO

chrome
chrome/gold

Grandera
Single-lever bath mixer 1/2"
wall mounted
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
integrated hand shower holder
automatic diverter: bath/shower
mousseur
integrated non-return valve in shower outlet
covered S-unions
protected against backflow



24 259 000
24 259 IGO

chrome
chrome/gold

Grandera
Single-lever shower mixer
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
outlet B or C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed
installation




24 260 000
24 260 IGO

chrome
chrome/gold

Grandera
Single-lever mixer with 2-way diverter
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed
installation

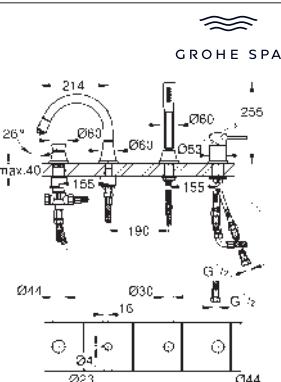

29 418 000
29 418 IGO

chrome
chrome/gold

Grandera
4-hole bath combination
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
pre-assembled spout fixing
single lever mixer operating element
bath spout with mousseur and diverter bath/shower
Grandera hand shower 7,6 l
metal shower hose 2000 mm
flexible connection hoses
connection for shower hose
protected against backflow
can be used with 29 037

29 037 000
Baseframe for installation under tiled surround



GROHE SPA

GROHE GRANDERA



| Ref. no. | Colour |
|--|-----------------------|
| 29 415 000 29 415 IGO | chrome chrome/gold |
| Grandera 5-hole bath/shower combination ceramic headparts 1/2", 90° GROHE Long-Life finish pre-assembled spout fixing single lever mixer operating element bath spout with mousseur and diverter bath/shower Grandera hand shower 7,6 l metal shower hose 2000 mm flexible connection hoses connection for shower hose protected against backflow can be used with 29 037 | |
| 29 037 000 Baseframe for installation under tiled surround | |

45 388 000
Supporting legs for baseframe



| 24 375 000 24 375 IGO | chrome chrome/gold |
|---|-----------------------|
| Grandera Single-lever bath mixer 1/2", floor mounted final installation for 29 086 / 45 984 GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish automatic diverter: bath/shower spout with mousseur projection 320 mm integrated non-return valve in shower outlet with shower holder Grandera hand shower 7,6 l Silverflex shower hose 1250 mm protected against backflow | |

45 984 001
chrome
Rough-in set 1/2" for floor-mounted mixers/spouts



| 13 484 000 13 484 IGO | chrome chrome/gold |
|--|-----------------------|
| Grandera Bath spout wall mounted GROHE Long-Life finish mousseur projection 177 mm | |






| 29 420 000 29 420 IGO | chrome chrome/gold |
|---|-----------------------|
| Grandera Volume Control Trim final installation for 29 032 000 GROHE Long-Life finish installation depth infinitely adjustable 43 - 91 mm | |
| 29 032 000 Concealed valve, pre-assembled head part 1/2" | |

| | Ref. no. | Colour |
|---|--|-----------------------|
|  | 26 852 000 26 852 IGO Grandera Stick Hand shower 1 spray spray pattern: Rain material: metal GROHE Water Saving 6.6 l/min flow limiter GROHE DreamSpray perfect spray pattern Inner WaterGuide for a longer life GROHE CoolTouch no risk of scalding GROHE Long-Life finish SpeedClean anti-lime system | chrome chrome/gold |
|  | 26 901 000 26 901 IGO Grandera Stick Wall holder set 1 spray Stick hand shower (26 852 xx0) wall hand shower holder (26 896 xx0) Rotaflex Metal Long-Life TwistStop shower hose 1500 mm (28 417) GROHE Water Saving 7.6 l/min flow limiter GROHE DreamSpray perfect spray pattern Inner WaterGuide for a longer life GROHE CoolTouch no risk of scalding GROHE Long-Life finish SpeedClean anti-lime system | chrome chrome/gold |
|  | 26 853 000 26 853 IGO Grandera Stick Shower rail set 1 spray Stick hand shower (26 852 xx0) shower rail, 900 mm (27 785) Rotaflex Metal Long-Life TwistStop shower hose 1750 mm (28 025) GROHE Water Saving 7.6 l/min flow limiter GROHE DreamSpray perfect spray pattern Inner WaterGuide for a longer life GROHE CoolTouch no risk of scalding GROHE FastFixation Plus adjustable distance between brackets for fixing to existing drilling holes GROHE Long-Life finish SpeedClean anti-lime system | chrome chrome/gold |
|  | 26 898 000 26 898 IGO Grandera 210 Head shower 1 spray spray pattern: Rain 221 x 221 mm material: metal with ball joint rotation angle $\pm 15^\circ$ connection thread 1/2" GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system | chrome chrome/gold |
|  | 26 899 000 Rainshower Grandera Shower arm ceiling 142 mm material: metal length 142 mm connection thread 1/2" GROHE Long-Life finish | chrome |



GROHE SPA

GROHE
GRANDERA



| | Ref. no. | Colour |
|--|--|-----------------------|
|   | 26 900 000 26 900 IGO Rainshower Grandera Shower arm 285 mm projection 282 mm material: metal connection thread 1/2" GROHE Long-Life finish | chrome chrome/gold |
|   | 26 897 000 26 897 IGO Grandera Shower outlet elbow 1/2" material: metal male thread protected against backflow GROHE Long-Life finish | chrome chrome/gold |
|   | 26 896 000 26 896 IGO Grandera Wall hand shower holder material: metal GROHE Long-Life finish | chrome chrome/gold |

| | Ref. no. | Colour |
|---|---|---|
|  |  Grandera Holder with ceramic soap dispenser material: ceramic/metal filling quantity 110 ml GROHE Long-Life finish | 40 910 000 40 910 IGO chrome chrome/gold |
|  |  Grandera Holder with ceramic tumbler material: ceramic/metal concealed fastening GROHE Long-Life finish | 40 909 000 40 909 IGO chrome chrome/gold |
|  |  Grandera Holder with ceramic soap dish material: ceramic/metal concealed fastening GROHE Long-Life finish | 40 923 000 40 923 IGO chrome chrome/gold |
|  |  Grandera Towel ring Ø 205 mm material: metal concealed fastening GROHE Long-Life finish | 40 929 000 40 929 IGO chrome chrome/gold |
|  |  Grandera Towel holder 600 mm GROHE Long-Life finish | 40 928 000 40 928 IGO chrome chrome/gold |
|  |  Grandera Bathrobe hook material: metal concealed fastening GROHE Long-Life finish | 40 930 000 40 930 IGO chrome chrome/gold |



GROHE SPA

GROHE
GRANDERASPA BATH
FAUCETS

| | Ref. no. | Colour |
|--|---|-----------------------|
|   | 40 960 000 40 960 IGO Grandera Bath grip, 300mm material: metal length 385 mm concealed fastening GROHE Long-Life finish | chrome chrome/gold |
|   | 40 908 000 40 908 IGO Grandera Toilet paper holder without cover material: metal concealed fastening GROHE Long-Life finish | chrome chrome/gold |
|   | 40 946 000 40 946 IGO Grandera Toilet brush set material: ceramic GROHE Long-Life finish | chrome chrome/gold |



GROHE SPA

GROHE
AIRIO

Ref. no.

Colour



39 958 00H

alpine white

Airio

Vessel basin round 45


without overflow

450 x 450 mm

including fixation set

including non-closable ceramic waste set

ultra-thin edge design

GROHE PureGuard anti-scale coating and anti-bacterial glazing
sanitary ware

39 966 00H

alpine white

Airio

Vessel basin lozenge 60


without overflow

600 x 400 mm

including fixation set


including non-closable ceramic waste set

ultra-thin edge design

GROHE PureGuard anti-scale coating and anti-bacterial glazing
sanitary ware

Ref. no.

Colour




39 980 KS0

velvet black

GROHE glass module
for Rapid SL and Uniset
with flushing cistern GD 2

for connecting shower toilet Sensia Arena or common wall-hung WCs
for tiled/plastered walls
two-piece glass cover made of tempered safety glass (8 mm)
upper part removable for maintenance
flush plate Skate Cosmopolitan, chrome
HPL mounting plate with hole pattern for all connections
mounting plate with concealed water connection for Sensia Arena
set for noise protection
including accessory for mounting glass plate and WC ceramic



39 980 LS0

moon white

GROHE glass module
for Rapid SL and Uniset
with flushing cistern GD 2

for connecting shower toilet Sensia Arena or common wall-hung WCs
for tiled/plastered walls
two-piece glass cover made of tempered safety glass (8 mm)
upper part removable for maintenance
flush plate Skate Cosmopolitan, chrome
HPL mounting plate with hole pattern for all connections
mounting plate with concealed water connection for Sensia Arena
set for noise protection
including accessory for mounting glass plate and WC ceramic

GROHE SPA SPA SHOWERS






CONTENTS

| | |
|---------------------------------|----|
| Aquasymphony | 76 |
| F-digital Deluxe | 77 |
| Rainshower Aqua Pure | 81 |
| Rainshower Aqua ceiling showers | 86 |
| Rainshower Aqua head showers | 89 |
| Rainshower Aqua body sprays | 91 |
| Rainshower Aqua hand showers | 92 |
| SPA shower accessories | 94 |
| SPA thermostats | 97 |

Ref. no.

Colour



26 863 000

chrome

**Rainshower Aqua 40" AquaSymphony
Ceiling shower 6+ sprays with light**

1016 mm x 762 mm x 145 mm

material: metal

min. flow rate 25 l/min, min. recommended pressure 3.0 bar

1 x AquaCurtain

1 x Pure XL spray

1 x 2 mist spray

2 x GROHE PureRain spray 400 x 190 mm

2 x XL Waterfall (separately controlled)

1 x 4 Bokoma Spray with adjustment angle 20°

full spectrum LED: soft light with changing rainbow colours

individually adjustable: permanent lighting with colour selection

power supply for light 12 V DC

SpeedClean anti-lime system

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

**requires rough-in set (26 865 000), F-digital Deluxe base unit box (26 864 000),
Bluetooth unit (36 475 000) and various cable connections – all to be ordered
separately due to installation situation.**

The ceiling construction must be appropriate for the static requirement of the
product (total product weight > 70 kg). Performance of the drainage must be of
sufficient size (> 100 l/min).

recommendation: configuration with Grohtherm SmartControl


3 x Grohtherm SmartControl (29 126 000)

3 x GROHE Rapido SmartBox (35 604 000)

1 x Rainshower Aqua Cube Stick wall holder set 1 spray (26 886 000)

Product contains built-in LED lamps, which cannot

be changed: energy efficiency class: A++



26 865 000

Rainshower Aqua 40"

Rough-in set

for use with Rainshower Aqua 40" AquaSymphony ceiling shower

1000 mm x 745 mm x 152 mm

min. installation depth: 167 mm

1/2" connections

The ceiling construction must be appropriate for the static requirement of the
product (total product weight > 70 kg). Performance of the drainage must be of
sufficient size (> 100 l/min).




48 348 000

chrome

Spray face

for SmartControl and head showers with multiple Bokoma sprays
including spray face with / without GROHE Logo
including disassembly-key

Ref. no. Colour

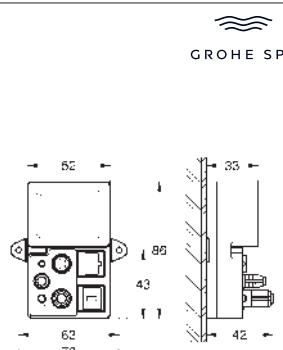

36 475 000

chrome

F-digital Deluxe

Bluetooth-Unit BT-01A for Apple and Android devices

with integrated electronic for wireless data communication

connection cable set for data communication and power supply (5 m each)

bluetooth transmitter power supply: 12 V

bluetooth transmitter frequency: 2.4 GHz

bluetooth range (max. 10 m) varies on used materials and walls between

transmitter and receiver

requires Base Unit Box 2.0 (36 476 000) or Base Unit Box 4.0 (26 864 000) – to be

ordered separately

bluetooth-enabled device (bluetooth V2.1 or higher) necessary

System requirements

Android

operating system: as of release 2.3.3

pixel density: 160 dpi minimum


display resolution: 320 x 470 pixels per inch

System requirements

Apple

Apple operating system: as of release iOS 6.0 and above

Mobile devices and GROHE SPA F-digital deluxe App are not included in delivery



36 476 000

chrome

F-digital Deluxe

Base Unit Box 2.0 Bluetooth (BCU V2.0)

for connecting light, sound and steam modules

2 plug connections, each for one pair of sound modules (36 473 000)

2 plug connections, each for one pair of light modules (36 472)

2 plug connections for steam module (29 414 000), including 1 connection for

steam generator and 1 connection for temperature sensor



2 plug connections for power supply

2 plug connections for Bluetooth unit (supply voltage and data line)

must be accessible for service

optional the base unit box can be placed into extra equipment 36 474 000

component has to be ordered separately



26 864 000

chrome

F-digital Deluxe

Base unit box 4.0 Bluetooth F-Series 40" (BCU V4.0)

to control LightCurtain of Rainshower Aqua 40" AquaSymphony ceiling shower

additional light, sound and steam modules can be connected

2 plug connections, each for one pair of sound modules (36 473 000)

1 plug connection for one pair of light modules (36 472 000)

1 plug connection LightCurtain for Rainshower Aqua 40" AquaSymphony

(26 863 000)

2 plug connections for steam module (29 414 000), including 1 connection for


steam generator and 1 connection for temperature sensor

2 plug connections for power supply

2 plug connections for Bluetooth unit (supply voltage and data line)

must be accessible for service

optional the base unit box can be placed into extra equipment 36 474 000



36 474 000

chrome

F-digital Deluxe

Rough-in set base unit box

for use with base unit box (26 864 000 or 36 476 000)

550 x 700 x 110 mm


height (100 mm) and depth (50 mm) adjustable

with removable front panel for installation

with adjustable front frame for installation in wall niches

galvanized and powder coated (RAL 9010, pure white) steel plate

1 mm thick steel plate



42 633 000

chrome

F-digital Deluxe

Power supply base unit box

power supply for base unit box (26 864 000 or 36 476 000)

each power supply for 2 light/sound modules (36 472 000 or 36 473 000)

max. 2 power supplies can be connected to the base unit



input voltage: 90-240 V AC, 50-60 Hz

output voltage: 12 V DC

CE and CCC approved

Ref. no.



Colour



36 473 000

**F-digital Deluxe
Sound set**



127 x 127 mm per module
full range stereo speaker
2 speakers with plug connections
waterproof & corrosion protected
GROHE Long-Life finish
requires rough-in set (29 413 000), F-digital Deluxe base unit box (26 864 000 or 36 476 000), Bluetooth unit (36 475 000) and various cable connections – all to be ordered separately due to installation situation



29 413 000

**F-digital Deluxe
Rough-in set sound set**



for use with double sound modules (36 473 000)
- 2 rough-in sets (115 x 115 x 62-87 mm)
- 2 cable extensions (5 m each)
- 1 Y-piece



36 472 000

**F-digital Deluxe
Light set**

127 x 127 mm per module
full spectrum LED: soft light with changing rainbow colours
individually adjustable: permanent lighting with colour selection
- 1 light module with two plug connections
- 1 light module with one plug connection
waterproof & corrosion protected
supply voltage: 12 V DC
GROHE Long-Life finish
requires rough-in set (29 412 000), F-digital Deluxe base unit box (26 864 000 or 36 476 000), Bluetooth unit (36 475 000) and various cable connections – all to be ordered separately due to installation situation
Product contains built-in LED lamps, which cannot be changed: energy efficiency class: A+



29 412 000

**F-digital Deluxe
Rough-in set light set**

for use with double light modules (36 472 000)
- 2 rough-in sets (115 x 115 x 62-87 mm)
- 2 cable extensions (5 m each)

Ref. no. Colour



26 828 000

F-digital Deluxe

Steam generator 9.9 kW with steam outlet and temperature sensor
consisting of:

steam generator 3.3 to 9.9 kW

480 x 350 x 160 mm

suitable for steam rooms up to 16 m³

supply voltage 400 V 3L+N+PE AC, 50 Hz

power 9.9 kW

water inlet 3/4"

operating pressure 1 - 10 bar (via pressure reducer)

automatic emptying

water outlet 1/2"

steam outlet 1/2"

type of protection IP 23

CE approved

with connection plug

steam outlet module with indentation for fragranced oil

127 x 127 mm

connection thread 1/2"



temperature sensor module

60 x 60 x 12 mm

SpeedClean anti-lime system

GROHE Long-Life finish

requires rough-in set (29 414 000), F-digital Deluxe base unit box (26 864 000 or 36 476 000), Bluetooth unit (36 475 000) and various cable connections – all to be ordered separately due to installation situation



29 414 000 chrome

F-digital Deluxe

Rough-in set steam generator

for use with steam module (26 828 000 or 26 829 000)

- 1 rough-in box for steam outlet (115 x 115 x 49-77 mm)

- 1 rough-in box for temperature sensor (58 x 83 x 80-105 mm)

- 1 cable extension temperature sensor, 5 m

- 1 cable extension steam generator, 5 m



42 634 000 chrome

F-digital Deluxe

Cable extension (4-pin) steam generator and LED light of Aquasymphony, 5 m

extension between base unit box (26 864 000 or 36 476 000) and steam generator (26 828 000 or 26 829 000)

cable extension up to 10 m



42 635 000 chrome


F-digital Deluxe

Cable extension (5-pin) light set, 5 m

connection between base unit box (26 864 000 or 36 476 000) and light modules (36 472 000)

each light module needs a separate extension cable

cable extension up to 10 m



42 636 000 chrome

F-digital Deluxe

Cable extension (2-pin) for power supply and speaker, 5 m

connection between base unit box (26 864 or 36 476) and power supply (42 633 or 42 638) or sound rough-in (29 413)

each power supply/sound rough-in needs a separate extension cable

cable extension up to 5 m

Ref. no.

Colour



→ 5000 ←
[] ... []

42 637 000

chrome

F-digital Deluxe

Cable extension temperature sensor, 5 m

extension between base unit box (26 864 000 or 36 476 000) and temperature sensor cable extension up to 10 m

Ref. no.

Colour



100964 000 0

chrome

Rainshower Aqua Pure

Shower system with Safety Mixer for wall mounting

consisting of:

horizontal 435 mm shower arm

exposed SmartControl thermostat with metal housing

allows change between:

head shower Rainshower Aqua Duo round, 360 mm, white acrylic spray plate

swing angle 0° - 30°

2 spray patterns:

GROHE PureRain, ActiveRain

hand shower Rainshower Aqua 130 (101 676 0000), white acrylic spray plate

3 spray patterns:

GROHE Rain, Rain+ and ActiveMassage

adjustable in height with gliding element

initial Rainshower Aqua Pure unit (101 672 9990) enclosed

shower hose 1750 mm

GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)

GROHE SmartTip showering spray selection via push of a ring

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 8.7 l/min

GROHE SmartControl with recessed metal buttons, push for ON-OFF, turn for volume adjustment from GROHE Water Saving to full flow

GROHE ProGrip Metal with knurl structure

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

integrated GROHE EasyReach shower tray (white glass)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

GROHE CoolTouch prevents scalding on hot surfaces

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 5 l/min.


minimum pressure 1.0 bar

internal 6 V lithium battery (42 886 000) type CR-P2

battery lifetime approx. 10 years

replacement filter: Rainshower Aqua Pure unit (101 672 9990)

optional: Rainshower Aqua glass shelf (101 677 0000)

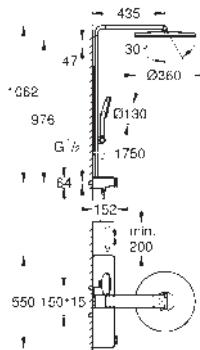

Ref. no. Colour



GROHE SPA

100964 K10 0
100964 KF0 0
100964 AL0 0
100964 GL0 0
100964 DA0 0

black/chrome
phantom black
brushed hard graphite
cool sunrise
warm sunset

Rainshower Aqua Pure

Shower system with Safety Mixer for wall mounting consisting of:

horizontal 435 mm shower arm
exposed SmartControl thermostat with metal housing
allows change between:
head shower Rainshower Aqua Duo round, 360 mm, black acrylic spray plate
swing angle 0° - 30°
2 spray patterns:

GROHE PureRain, ActiveRain
hand shower Rainshower Aqua 130 (101 676), black acrylic spray plate

3 spray patterns:
GROHE Rain, Rain+ and ActiveMassage
adjustable in height with gliding element
initial Rainshower Aqua Pure unit (101 672 9990) enclosed
shower hose 1750 mm

GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)
GROHE SmartTip showering spray selection via push of a ring

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 8.7 l/min

GROHE SmartControl with recessed metal buttons, push for ON-OFF, turn for volume adjustment from GROHE Water Saving to full flow

GROHE ProGrip Metal with knurl structure

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C included
integrated **GROHE EasyReach** shower tray (black glass)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

GROHE CoolTouch prevents scalding on hot surfaces
suitable for instantaneous heaters from 18 kW/h
minimum flow rate 5 l/min.


minimum pressure 1.0 bar

internal 6 V lithium battery (42 886 000) type CR-P2

battery lifetime approx. 10 years

replacement filter: Rainshower Aqua Pure unit (101 672 9990)

optional: Rainshower Aqua glass shelf (101 677 0000)



Ref. no.

Colour



100961 000 0

chrome

Rainshower Aqua Pure

Shower system with Safety Mixer for wall mounting

consisting of:

horizontal 435 mm shower arm

exposed SmartControl thermostat with metal housing

allows change between:

head shower Rainshower Aqua Duo square, 400 x 230 mm, white acrylic spray plate

swing angle 0° - 30°

2 spray patterns:

GROHE PureRain, ActiveRain

hand shower Rainshower Aqua 130 (101 676 0000), white acrylic spray plate

3 spray patterns:

GROHE Rain, Rain+ and ActiveMassage

adjustable in height with gliding element

initial Rainshower Aqua Pure unit (101 672 9990) enclosed

shower hose 1750 mm

GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)

GROHE SmartTip showering spray selection via push of a ring

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 8.7 l/min

GROHE SmartControl with recessed metal buttons, push for ON-OFF, turn for volume adjustment from GROHE Water Saving to full flow

GROHE ProGrip Metal with knurl structure

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included integrated **GROHE EasyReach** shower tray (white glass)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

GROHE CoolTouch prevents scalding on hot surfaces

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 5 l/min.

minimum pressure 1.0 bar

internal 6 V lithium battery (42 886 000) type CR-P2

battery lifetime approx. 10 years

replacement filter: Rainshower Aqua Pure unit (101 672 9990)

optional: Rainshower Aqua glass shelf (101 677 0000)



Ref. no.

Colour



| | |
|--------------|-----------------------|
| 100961 K10 0 | black/chrome |
| 100961 KF0 0 | phantom black |
| 100961 AL0 0 | brushed hard graphite |
| 100961 GL0 0 | cool sunrise |
| 100961 DA0 0 | warm sunset |

Rainshower Aqua Pure

Shower system with Safety Mixer for wall mounting
consisting of:

horizontal 435 mm shower arm
exposed SmartControl thermostat with metal housing
allows change between:
head shower Rainshower Aqua Duo square 400 x 230 mm, black acrylic spray plate

swing angle 0° - 30°

2 spray patterns:

GROHE PureRain, ActiveRain

hand shower Rainshower Aqua 130 (101 676), black acrylic spray plate

3 spray patterns:

GROHE Rain, Rain+ and ActiveMassage

adjustable in height with gliding element

initial Rainshower Aqua Pure unit (101 672 9990) enclosed

shower hose 1750 mm

GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)

GROHE SmartTip showering spray selection via push of a ring

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 8.7 l/min

GROHE SmartControl with recessed metal buttons, push for ON-OFF, turn for volume adjustment from GROHE Water Saving to full flow

GROHE ProGrip Metal with knurl structure

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C included

integrated GROHE EasyReach shower tray (black glass)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

GROHE CoolTouch prevents scalding on hot surfaces

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 5 l/min.


minimum pressure 1.0 bar

internal 6 V lithium battery (42 886 000) type CR-P2

battery lifetime approx. 10 years

replacement filter: Rainshower Aqua Pure unit (101 672 9990)

optional: Rainshower Aqua glass shelf (101 677 0000)



101672 999 0

Rainshower Aqua Pure


Filter cartridge for Rainshower Aqua Pure

compatible with 100961, 100962, 100964, 101680
water purifying unit

GROHE Rainshower Aqua Pure removes chlorine and odor (hand shower)
capacity 12,000 l

for beautiful, healthy skin and hair

removes chlorine and substances responsible for unpleasant odor



101676 000 0

chrome

Rainshower Aqua

Hand shower 3 sprays

white acrylic spray plate

spray patterns:

GROHE Rain, Rain+ and ActiveMassage

GROHE SmartTip showering spray selection via push of a ring

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 8.4 l/min

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish


SpeedClean anti-lime system


Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses

suitable for instantaneous heater

minimum pressure 1.0 bar






 GROHE SPA

Ref. no.

Colour

| | |
|--------------|-----------------------|
| 101676 K10 0 | black/chrome |
| 101676 KF0 0 | phantom black |
| 101676 AL0 0 | brushed hard graphite |
| 101676 GL0 0 | cool sunrise |
| 101676 DAO 0 | warm sunset |


Rainshower Aqua
Hand shower 3 sprays
 black acrylic spray plate
 spray patterns:
 GROHE Rain, Rain+ and ActiveMassage
 GROHE SmartTip showering spray selection via push of a ring
GROHE Water Saving - Less water, perfect flow
 maximum flow rate (at 3 bar): 8.4 l/min
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
 SpeedClean anti-lime system
Inner WaterGuide for a longer life
 universal mounting system, fitting all standard shower hoses
 suitable for instantaneous heater
 minimum pressure 1.0 bar



 GROHE SPA

| | |
|--------------|-----------------------|
| 101673 000 0 | chrome |
| 101673 KF0 0 | phantom black |
| 101673 AL0 0 | brushed hard graphite |
| 101673 GL0 0 | cool sunrise |
| 101673 DAO 0 | warm sunset |

Rainshower Aqua
Shower rail, 600 mm
 metal wall brackets
 height adjustable glide element and swivel holder
GROHE Long-Life finish




 GROHE SPA

101677 000 0 chrome

Rainshower Aqua Shelf

for Rainshower Aqua Pure shower systems
 compatible with 100961, 100962, 100964, 101680
 height adjustable (by using an Allen key)
 with **white glass shower tray**
 material: metal
GROHE EasyReach shower tray
GROHE Long-Life finish



 GROHE SPA


| | |
|--------------|-----------------------|
| 101677 K10 0 | black/chrome |
| 101677 KF0 0 | phantom black |
| 101677 AL0 0 | brushed hard graphite |
| 101677 GL0 0 | cool sunrise |
| 101677 DAO 0 | warm sunset |

Rainshower Aqua
Shelf
 for Rainshower Aqua Pure shower systems
 compatible with 100961, 100962, 100964, 101680
 height adjustable (by using an Allen key)
 with black glass shower tray
 material: metal
GROHE EasyReach shower tray
GROHE Long-Life finish

RAINSHOWER AQUA CEILING SHOWERS

Ref. no.

Colour



26 731 000

chrome

Rainshower Aqua Mono

Ceiling shower 1 spray including rough-in

spray pattern:

GROHE PureRain

including concealed body, mounting material and sealing material for further combinations

334 x 334 mm

spray plate chrome


connection thread 1/2"

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

maximum flow rate (at 3 bar): 21 l/min (with non-restricted flow)



26 733 000

chrome

Rainshower Aqua Duo

Ceiling shower 2 sprays including rough-in

spray patterns:

GROHE PureRain, ActiveRain

including concealed body, mounting material and sealing material for further combinations

334 x 334 mm

spray plate chrome


connection threads 1/2"

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

maximum flow rate (at 3 bar): 20 + 16 l/min (with non-restricted flow)



26 734 000

chrome

Rainshower Aqua Cascade

Ceiling shower cover including spray former

1 spray pattern:

GROHE XL Waterfall

334 x 111 mm

spray plate chrome

spray insert white

GROHE Long-Life finish

min. recommended pressure 3.0 bar


rough-in box 26 739 000 to be ordered separately

maximum flow rate (at 3 bar): 18 l/min (with non-restricted flow)



26 739 000

Rainshower Aqua small rough-in for ceiling showers



26 735 000

chrome

Rainshower Aqua Mist

Spray former

spray pattern:

GROHE Drizzle spray


Ø 34 mm

spray insert grey

GROHE Long-Life finish

maximum flow rate (at 3 bar): 1 l/min (with non-restricted flow)

rough-in box 26 739 000 and, according to number of spray formers, cover 26 784 000, 26 785 000 or 26 786 000 have to be ordered separately



26 737 000

chrome

Rainshower Aqua Pure

Spray former

spray pattern:

GROHE Pure XL spray

Ø 34 mm

GROHE Long-Life finish

min. recommended pressure 2.0 bar


maximum flow rate (at 3 bar): 27 l/min

rough-in box 26 739 000 and, according to number of spray formers, cover 26 784 000, 26 785 000 or 26 786 000 have to be ordered separately

RAINSHOWER AQUA CEILING SHOWERS

Ref. no.

Colour



 GROHE SPA

26 784 000

Rainshower Aqua 1 hole

Ceiling shower cover

for 1 spray

334 x 111 mm


GROHE Long-Life finish

spray plates 26 735 000 and/or 26 737 000 to be ordered separately as well as rough-in box 26 739 000

 GROHE SPA

26 739 000

Rainshower Aqua small rough-in for ceiling showers



 GROHE SPA

26 785 000

Rainshower Aqua 2 holes

Ceiling shower cover

for 1 - 2 sprays

334 x 111 mm


GROHE Long-Life finish

spray plates 26 735 000 and/or 26 737 000 to be ordered separately as well as rough-in box 26 739 000

 GROHE SPA

26 739 000

Rainshower Aqua small rough-in for ceiling showers



 GROHE SPA

26 786 000

Rainshower Aqua 3 holes

Ceiling shower cover

for 2 sprays

334 x 111 mm


GROHE Long-Life finish

spray plates 26 735 000 and/or 26 737 000 to be ordered separately as well as rough-in box 26 739 000

 GROHE SPA

26 739 000

Rainshower Aqua small rough-in for ceiling showers



 GROHE SPA

26 873 000

Rainshower Aqua 20"

Ceiling shower 1 spray

Rain

508 x 508 mm


material: metal

connection thread 1/2"

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

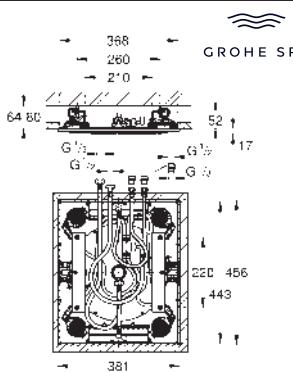

 GROHE SPA

26 888 000

Rainshower Aqua 15"

Ceiling shower 3 sprays

spray patterns:

Rain, Bokoma Spray, Waterfall and combinations

381 mm (width) x 17 mm (height) x 456 mm (depth)

material: metal

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE XL Waterfall extra wide waterfall spray

SpeedClean anti-lime system

flow of single spray at 3 bar:

1 x Rain spray 300 mm: approx. 20 l/min

2 x XL Waterfall: 1 x Waterfall 20 l, 2 x Waterfall 32 l/min


4 x Bokoma Spray with adjustment angle 20°: 20 l/min

head shower has to be controlled by 4 outlets

RAINSHOWER AQUA CEILING SHOWERS

Ref. no.

Colour



GROHE SPA

26 883 000

chrome

Rainshower Aqua 230

Ceiling shower 1 spray

spray pattern:

Rain

230 x 230 mm


material: metal

connection thread 1/2"

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system



GROHE SPA

26 874 000

chrome

Rainshower Aqua 10"

Ceiling shower 1 spray

spray pattern:

Rain

254 x 254 mm


material: metal

connection thread 1/2"

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system



 GROHE SPA

26 887 000

chrome

Rainshower Aqua 15"

Head shower 3 sprays

Rain, Bokoma Spray, Waterfall and combinations

381 mm (width) x 60 mm (height) x 677 mm (depth)

material: metal

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE XL Waterfall extra wide waterfall spray

SpeedClean anti-lime system

flow of single spray at 3 bar:


1 x Rain spray 300 mm: approx. 20 l/min

2 x XL Waterfall: 1 x Waterfall 20 l, 2 x Waterfall 32 l/min

4 x Bokoma Spray with adjustment angle 20°: 20 l/min

requires rough-in set (26 855 000) - to be ordered separately

head shower has to be controlled by 4 outlets




 GROHE SPA

26 855 000

chrome

Rainshower Aqua rough-in set for head shower 3 sprays




 GROHE SPA

26 890 000

chrome

Rainshower Aqua 75

Head shower 1 spray
Normal spray
sprayface: metal
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system



 GROHE SPA

26 862 000

chrome

Rainshower Aqua 10"

Head shower set 422 mm, 1 spray

head shower Rainshower Aqua 10" (26 871)

1 spray pattern:


Rain

shower arm Rainshower square 422 mm (26 145)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish
SpeedClean anti-lime system

suitable for instantaneous heater



 GROHE SPA

26 860 000

chrome

Rainshower Aqua 10"

Head shower set 286 mm, 1 spray

head shower Rainshower Aqua 10" (26 872)

material: metal

1 spray pattern:

Rain


shower arm Rainshower 286 mm (27 488)

GROHE Water Saving 9.5 l/min flow limiter

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system



 GROHE SPA

26 872 000

chrome

Rainshower Aqua 10"

Head shower 1 spray

Rain

254 x 254 mm

material: metal

ball joint +/- 20° rotatable

connection thread 1/2"

GROHE Water Saving 9.5 l/min flow limiter


GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Ref. no.

Colour



26 858 000

chrome

Rainshower Aqua 230

Head shower set 286 mm, 1 spray
head shower Rainshower Aqua 230 (26 877 000)

material: metal

1 spray pattern: Rain


shower arm Rainshower 286 mm (27 709)

GROHE Water Saving 9.5 l/min flow limiter

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system



26 859 000

chrome

Rainshower Aqua 230

Head shower set ceiling 154 mm, 1 spray

head shower Rainshower Aqua 230 (26 877 000)

material: metal

1 spray pattern: Rain


shower arm Rainshower ceiling 154 mm (27 711)

GROHE Water Saving 9.5 l/min flow limiter

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system



26 877 000

chrome

Rainshower Aqua 230

Head shower 1 spray

spray pattern:

Rain

230 x 230 mm

material: metal

ball joint with turning angle $\pm 15^\circ$

connection thread 1/2"

GROHE Water Saving 9.5 l/min flow limiter

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish


SpeedClean anti-lime system



26 868 000

chrome

ditto, with GROHE Water Saving 6.6 l/min flow limiter



27 709 000

chrome

Rainshower


Shower arm 286 mm

material: metal

connection thread 1/2"

with square escutcheon and rectangular arm
suitable for square Rainshower Allure
and Euphoria Cube head shower

GROHE Long-Life finish



27 711 000

chrome


Rainshower

Shower arm ceiling 154 mm

material: metal

connection thread 1/2"

GROHE Long-Life finish



 GROHE SPA


Ref. no.

Colour

| | |
|------------|-----------------------|
| 26 801 000 | chrome |
| 26 801 DC0 | supersteel |
| 26 801 GL0 | cool sunrise |
| 26 801 GN0 | brushed cool sunrise |
| 26 801 DAO | warm sunset |
| 26 801 DL0 | brushed warm sunset |
| 26 801 A00 | hard graphite |
| 26 801 AL0 | brushed hard graphite |

**Rainshower Aqua
Body spray round 2 spray**

spray patterns:
PureRain, ActiveJet
including concealed body and compound seal
75 mm
pivoting range ± 15° rotatable
connection thread 1/2"
throw distance 600 mm
GROHE Water Saving 3.3 l/min flow limiter
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
minimum pressure 1.0 bar
not suitable for instantaneous heater



 GROHE SPA

26 802 000

| | |
|------------|-----------------------|
| 26 802 000 | chrome |
| 26 802 DC0 | supersteel |
| 26 802 GN0 | brushed cool sunrise |
| 26 802 DL0 | brushed warm sunset |
| 26 802 A00 | hard graphite |
| 26 802 AL0 | brushed hard graphite |

**Rainshower Aqua
Body spray cube 2 spray**

spray patterns:
PureRain, ActiveJet
including concealed body and compound seal
75 x 75 mm
pivoting range ± 15° rotatable
connection thread 1/2"
throw distance 600 mm
GROHE Water Saving 3.3 l/min flow limiter
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
minimum pressure 1.0 bar
not suitable for instantaneous heater

Ref. no.

Colour



 GROHE SPA

26 866 000
26 866 DCO
26 866 GLO
26 866 GN0
26 866 DAO
26 866 DL0
26 866 A00
26 866 AL0
26 866 2430

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
hard graphite
brushed hard graphite
matte black

**Rainshower Aqua Stick
Hand shower 1 spray**

Normal spray

material: metal

GROHE Water Saving 6.6 l/min flow limiter


GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses



 GROHE SPA

26 892 000

chrome

**Rainshower Aqua Stick
Wall holder set 1 spray**

material: metal

hand shower Rainshower Aqua Stick (26 889 000)

wall shower holder (26 894 000)


shower hose (28 151 002)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life



 GROHE SPA

26 894 000


chrome

**Rainshower Aqua
Wall hand shower holder**

not adjustable

material: metal

GROHE Long-Life finish



 GROHE SPA

26 893 000


chrome

**Rainshower Aqua
Adaptor 1/2" x 1/2"
for handshower**

material: metal

for use with hand shower holder or shower rail

GROHE Long-Life finish



 GROHE SPA

26 885 000
26 885 GLO
26 885 DAO

chrome
cool sunrise
warm sunset

**Rainshower Aqua Cube Stick
Hand shower 1 spray**

Normal spray

material: metal

GROHE Water Saving 9.5 l/min flow limiter

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish


SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses

Ref. no.

Colour



GROHE SPA

26 886 000

chrome

Rainshower Aqua Cube Stick

Wall holder set 1 spray

hand shower, metal (26 885 000)

wall shower holder (26 847 000)

metal shower hose 1500 mm (28 417)

GROHE Water Saving 9.5 l/min flow limiter


GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



GROHE SPA

26 847 000

chrome


Allure Brilliant

Wall hand shower holder

not adjustable

material: metal

GROHE Long-Life finish



GROHE SPA

26 850 000

chrome

Allure Brilliant

Shower outlet elbow 1/2"

male connection thread 1/2"


protected against backflow

material: metal

GROHE Long-Life finish


Ref. no.

Colour




| | |
|------------|-----------------------|
| 26 658 000 | chrome |
| 26 658 DC0 | supersteel |
| 26 658 GLO | cool sunrise |
| 26 658 GN0 | brushed cool sunrise |
| 26 658 DAO | warm sunset |
| 26 658 DL0 | brushed warm sunset |
| 26 658 A00 | hard graphite |
| 26 658 AL0 | brushed hard graphite |

Rainshower
Shower outlet elbow 1/2" with holder
with round escutcheon
Ø 48 mm
male connection thread 1/2"
metal body
protected against backflow
GROHE Long-Life finish




| | |
|------------|-----------------------|
| 26 659 000 | chrome |
| 26 659 DC0 | supersteel |
| 26 659 GLO | cool sunrise |
| 26 659 GN0 | brushed cool sunrise |
| 26 659 DAO | warm sunset |
| 26 659 DL0 | brushed warm sunset |
| 26 659 A00 | hard graphite |
| 26 659 AL0 | brushed hard graphite |

Rainshower
Shower outlet elbow 1/2" with holder
with square escutcheon
48 x 48 mm
male connection thread 1/2"
metal body
protected against backflow
GROHE Long-Life finish




| | |
|------------|-----------------------|
| 26 370 000 | chrome |
| 26 370 DC0 | supersteel |
| 26 370 GLO | cool sunrise |
| 26 370 GN0 | brushed cool sunrise |
| 26 370 DAO | warm sunset |
| 26 370 DL0 | brushed warm sunset |
| 26 370 A00 | hard graphite |
| 26 370 AL0 | brushed hard graphite |

Euphoria Cube
Shower outlet elbow 1/2"
with wall shower holder
male connection thread 1/2"
protected against backflow
GROHE Long-Life finish




| | |
|------------|-----------------------|
| 27 074 000 | chrome |
| 27 074 DC0 | supersteel |
| 27 074 GLO | cool sunrise |
| 27 074 GN0 | brushed cool sunrise |
| 27 074 DAO | warm sunset |
| 27 074 DL0 | brushed warm sunset |
| 27 074 A00 | hard graphite |
| 27 074 AL0 | brushed hard graphite |

Rainshower
Wall hand shower holder
not adjustable
with round escutcheon
GROHE Long-Life finish




| Ref. no. | Colour |
|------------|-----------------------|
| 27 057 000 | chrome |
| 27 057 DC0 | supersteel |
| 27 057 GL0 | cool sunrise |
| 27 057 GN0 | brushed cool sunrise |
| 27 057 DAO | warm sunset |
| 27 057 DL0 | brushed warm sunset |
| 27 057 AL0 | brushed hard graphite |
| 27 057 A00 | hard graphite |

Rainshower
Shower outlet elbow 1/2"
male connection thread 1/2"
with round escutcheon
protected against backflow
GROHE Long-Life finish




| | |
|------------|-----------------------|
| 27 075 000 | chrome |
| 27 075 DC0 | supersteel |
| 27 075 GL0 | cool sunrise |
| 27 075 GN0 | brushed cool sunrise |
| 27 075 DAO | warm sunset |
| 27 075 DL0 | brushed warm sunset |
| 27 075 A00 | hard graphite |
| 27 075 AL0 | brushed hard graphite |

Rainshower
Wall hand shower holder
not adjustable
with square escutcheon
GROHE Long-Life finish



| | |
|------------|-----------------------|
| 27 076 000 | chrome |
| 27 076 DC0 | supersteel |
| 27 076 GL0 | cool sunrise |
| 27 076 GN0 | brushed cool sunrise |
| 27 076 DAO | warm sunset |
| 27 076 DL0 | brushed warm sunset |
| 27 076 A00 | hard graphite |
| 27 076 AL0 | brushed hard graphite |


Rainshower
Shower outlet elbow
male connection thread 1/2"
with square escutcheon
protected against backflow
GROHE Long-Life finish



GROHE SPA

| | |
|------------|-------------|
| 26 900 000 | chrome |
| 26 900 IG0 | chrome/gold |

Rainshower Grandera
Shower arm 285 mm
projection 285 mm
material: metal
connection thread 1/2"
GROHE Long-Life finish




GROHE SPA

| | |
|------------|-------------|
| 26 899 000 | chrome |
| 26 899 IG0 | chrome/gold |

Rainshower Grandera
Shower arm ceiling 142 mm
material: metal
length 142 mm
connection thread 1/2"
GROHE Long-Life finish

Ref. no.


Colour



26 847 000

chrome


Allure Brilliant
Wall hand shower holder
not adjustable
material: metal
GROHE Long-Life finish



26 850 000

chrome

Allure Brilliant
Shower outlet elbow 1/2"
male connection thread 1/2"
protected against backflow
material: metal
GROHE Long-Life finish



Ref. no. Colour

27 618 000 chrome

Grohtherm F

Safety Mixer trim with integrated 2-way diverter
for bath or shower with more than one outlet
for use with Rapido T rough-in box 35 500 000
sold separately

GROHE Long-Life finish

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included
metal handle for temperature control
metal handle for Aquadimmer control with
multiple function

- shut off and flow control

- diverter for 2 outlets


3rd outlet requires separate volume control
rectangular metal wall escutcheon with
hidden fixing and hidden sealings

flow rate:

- max. 53 l/min at 3 bar by using all 3 outlets
at the same time
- bottom outlet 50 l/min. at 3 bar
- top outlet left (bath) 30 l/min. at 3 bar
- top outlet right (shower) 24 l/min at 3 bar

35 500 000 chrome

GROHE Rapido T safety mixer for concealed installation



27 619 000 chrome

Grohtherm F

Safety Mixer trim
for high-flow, multiple outlet custom
shower applications
requires separate volume controls
for use with Rapido T rough-in box 35 500 000
sold separately

GROHE Long-Life finish

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included
metal handle for temperature control
rectangular metal wall escutcheon with
hidden fixing and hidden sealings

flow rate:


- max. 53 l/min at 3 bar by using all 3 outlets
at the same time
- bottom outlet 50 l/min. at 3 bar
- top outlets left/right, each 36 l/min. at 3 bar
without concealed body

35 500 000 chrome

GROHE Rapido T safety mixer for concealed installation




GROHE SPA



26 879 000 chrome

Grohtherm F


Single volume control trim
for use with rough-in box 35 028 000 (1/2" connections) /
sold separately
metal handle for volume control
metal wall escutcheon with hidden fixing
and hidden sealing
GROHE Long-Life finish

35 028 000

GROHE Rapido C rough-in box for single volume control




GROHE SPA



26 880 000 chrome

Grohtherm F


Triple volume control trim
for use with rough-in box 35 031 000 (1/2" connections) /
sold separately
metal handles for volume control
metal wall escutcheon with hidden fixing
and hidden sealing
vertical and horizontal installation
GROHE Long-Life finish

35 031 000

GROHE Rapido C rough-in box for triple volume control

Ref. no.

Colour



GROHE SPA

26 878 000

chrome

Grohtherm F

Wall shower union with integrated shower holder

1/2" shower outlet

vertical and horizontal installation

protected against backflow

for use with rough-in box 35 107 000 (1/2" connection) / 35 108 000 (1/2" NPT thread), sold separately

hand shower and shower hose sold separately




GROHE SPA

35 107 000

chrome

Grohtherm F rough-in box for wall shower union 26 878 000



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation

29 123 000
29 123 DC0
29 123 GNO
29 123 DL0
29 123 A00
29 123 AL0

chrome
supersteel
brushed cool sunrise
brushed warm sunset
hard graphite
brushed hard graphite

Grohtherm SmartControl

Safety mixer for concealed installation with one valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included


built-in non-return valves and dirt strainers

flow performance: outlet A (to external shut-off) = 34 l/min, outlet B/C = 29 l/min



35 604 000


GROHE Rapido SmartBox universal rough-in box for concealed installation



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation


Ref. no. Colour



| | |
|--|--------|
| 29 125 000 | chrome |
| Grohtherm SmartControl | |
| Safety mixer for concealed installation with 2 valves | |
| and integrated shower holder | |
| final installation for GROHE Rapido SmartBox (35 604) | |
| GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable | |
| GROHE Long-Life finish | |
| GROHE SmartControl push for ON-OFF, turn for volume adjustment | |
| exchangeable symbols | |
| GROHE TurboStat compact cartridge | |
| GROHE ProGrip with knurl structure | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included | |
| built-in non-return valves and dirt strainers | |
| multiple outlets can be run simultaneously | |
| integrated shower union with shower outlet 1/2" | |
| flow performance: outlet B = 24 l/min, hand shower = 12 l/min, outlet B + hand shower = 27 l/min | |



35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation




| | |
|-------------|-----------------------|
| 29 126 000 | chrome |
| 29 126 DC0 | supersteel |
| 29 126 GL0 | cool sunrise |
| 29 126 GN0 | brushed cool sunrise |
| 29 126 DAO0 | warm sunset |
| 29 126 DL0 | brushed warm sunset |
| 29 126 A00 | hard graphite |
| 29 126 AL0 | brushed hard graphite |

| | |
|--|--|
| Grohtherm SmartControl | |
| Safety mixer for concealed installation with 3 valves | |
| final installation for GROHE Rapido SmartBox (35 604) | |
| GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable | |
| GROHE Long-Life finish | |
| GROHE SmartControl push for ON-OFF, turn for volume adjustment | |
| exchangeable symbols | |
| GROHE TurboStat compact cartridge | |
| GROHE ProGrip with knurl structure | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included | |
| built-in non-return valves and dirt strainers | |
| multiple outlets can be run simultaneously | |
| flow performance: outlet A = 23 l/min, outlet B = 27 l/min, outlet C = 23 l/min, | |
| outlet A + B = 33 l/min, outlet A + B + C = 36 l/min | |



35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



| | |
|------------|-----------------------|
| 29 127 000 | chrome |
| 29 127 DC0 | supersteel |
| 29 127 GN0 | brushed cool sunrise |
| 29 127 DL0 | brushed warm sunset |
| 29 127 A00 | hard graphite |
| 29 127 AL0 | brushed hard graphite |

Grohtherm SmartControl

Triple volume control trim

final installation for GROHE Rapido SmartBox 35 600/35 604/35 601

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE ProGrip with knurl structure

multiple outlets can be run simultaneously


flow performance: outlet D = 28 l/min, outlet E = 28 l/min, outlet A = 28 l/min, outlet D+E+A = 65 l/min



35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation

Colour

Ref. no.



| | |
|------------|-----------------------|
| 29 118 000 | chrome |
| 29 118 DCO | supersteel |
| 29 118 GLO | cool sunrise |
| 29 118 DAO | warm sunset |
| 29 118 DLO | brushed warm sunset |
| 29 118 A00 | hard graphite |
| 29 118 AL0 | brushed hard graphite |

Grohtherm SmartControl

Safety mixer for concealed installation with one valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge


GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers
flow performance: outlet A (to external shut-off) = 34 l/min, outlet B/C = 29 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



| | |
|------------|-----------------------|
| 29 119 000 | chrome |
| 29 119 DCO | supersteel |
| 29 119 GLO | cool sunrise |
| 29 119 DAO | warm sunset |
| 29 119 DLO | brushed warm sunset |
| 29 119 A00 | hard graphite |
| 29 119 AL0 | brushed hard graphite |

Grohtherm SmartControl

Safety mixer for concealed installation with 2 valves
final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge


GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers
multiple outlets can be run simultaneously
flow performance: outlet B = 24 l/min, outlet C = 26 l/min, outlet B+C = 29 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



| | |
|------------|--------|
| 29 120 000 | chrome |
|------------|--------|

Grohtherm SmartControl

Safety mixer for concealed installation with 2 valves
and integrated shower holder

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure


GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers
multiple outlets can be run simultaneously
integrated shower union with shower outlet 1/2"
flow performance: outlet B = 24 l/min, hand shower = 12 l/min, outlet B + hand
shower = 27 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation

Ref. no. Colour



| | |
|------------|-----------------------|
| 29 121 000 | chrome |
| 29 121 DC0 | supersteel |
| 29 121 GLO | cool sunrise |
| 29 121 DAO | warm sunset |
| 29 121 DL0 | brushed warm sunset |
| 29 121 A00 | hard graphite |
| 29 121 AL0 | brushed hard graphite |

Grohtherm SmartControl

Safety mixer for concealed installation with 3 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included


built-in non-return valves and dirt strainers

multiple outlets can be run simultaneously

flow performance: outlet A = 23 l/min, outlet B = 27 l/min, outlet C = 23 l/min,
outlet A + B = 33 l/min, outlet A + B + C = 36 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



| | |
|------------|-----------------------|
| 29 122 000 | chrome |
| 29 122 DC0 | supersteel |
| 29 122 GLO | cool sunrise |
| 29 122 DAO | warm sunset |
| 29 122 DL0 | brushed warm sunset |
| 29 122 A00 | hard graphite |
| 29 122 AL0 | brushed hard graphite |

Grohtherm SmartControl

Triple volume control trim

final installation for GROHE Rapido SmartBox 35 600/35 604/35 601

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE ProGrip with knurl structure

multiple outlets can be run simultaneously

flow performance: outlet D = 28 l/min, outlet E = 28 l/min, outlet A = 28 l/min,
outlet D+E+A = 65 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



14 077 XH0 chrome/frosted granite

SmartControl

Caps concealed

9 caps with 6 different symbols

fits Grohtherm SmartControl and SmartControl mixer



FOR THE PROS, FROM THE PROS

GROHE PROFESSIONAL

YOUR DAILY SUPPORTER

We know the great number of tasks and challenges the installers face every day. That is why making their work life easier has always been at the heart of our innovation mindset.

A close-up photograph showing a person's hands, wearing a blue long-sleeved shirt, working on a copper pipe fitting. One hand holds a wrench, and the other stabilizes the pipe. The background is blurred.

PROFESSIONAL

GROHE

A DIFFERENTIATED PORTFOLIO WITH DEDICATED PRODUCT LINES **CUSTOM-MADE PACKAGING AND SKUS FOR 3-TIER DISTRIBUTION**

- For Products with Professional logo no sales by GROHE to DIY & eCommerce
- Visible USPs on packaging conceived to ease the installers' work
- Dedicated Product lines as Bestsellers to speed up the installation and meet the design needs of A&D and end-users:

**Rapido Smartbox, Eurosmart, Grohtherm, Tempesta,
Rapid SL, BauEdge ceramic, Eurosmart kitchen,
Essence, Euphoria** and all products marked with
Professional logo



HIDDEN CHAMPIONS: GROHE PROFESSIONAL DEDICATED SKUS **TO STAND AHEAD OF COMPETITION**

- Dedicated SKUs with Universal concealed solutions easy to be stocked by the wholesaler for multiple budgets and design options
- Matching colors of faucets and flush plates
- Matching ceramics for toilets and basins to avoid splashing effects
- Vertical or horizontal flush plate installation depending on design needs
- Shower element compatible with Nordics Leakage box for wooden houses
- 3 outlets for multi-function showering just with one concealed box
- Bottom inlets for shower elements speeding up the installation time and avoiding extra piping
- No master plumber required for later installation of flush plates, saving precious time of the installers







GROHE PROFESSIONAL CONTRIBUTES TO TACKLE **THE LABOR FORCE SHORTAGE & DEVELOPS THE NEXT GENERATIONS**

- With our GIVE Program we are supporting to close the gap of skilled installers
- Introduce GROHE to young and developing plumbing students and to collaborate with installers schools across the EMENA region
- To help improve facilities, GROHE sets up a fully functioning training environment with modern equipment, training material and a written examination that will set new industry standards
- Planned to have 100 collaborations by 2025 more visibility of installer's expertise and certified status thanks to GROHE website with over 1 M clicks per month
- After the training we support the plumbing students with potential work experience or placements with GROHE partners




Within the GIVE Program GROHE also supports WorldSkills as Global Partner to demonstrate what impact skilled professionals can have today and for the more sustainable future.

EVERY DROP COUNTS

GROHE'S RESOURCE-EFFICIENT TECHNOLOGIES

- 1 GROHE SENSA ARENA
- 2 GROHE CERAMICS
- 3 GROHE SILKMOVE ES
- 4 GROHE SENSE AND GROHE SENSE GUARD
- 5 GROHE ECOJOY

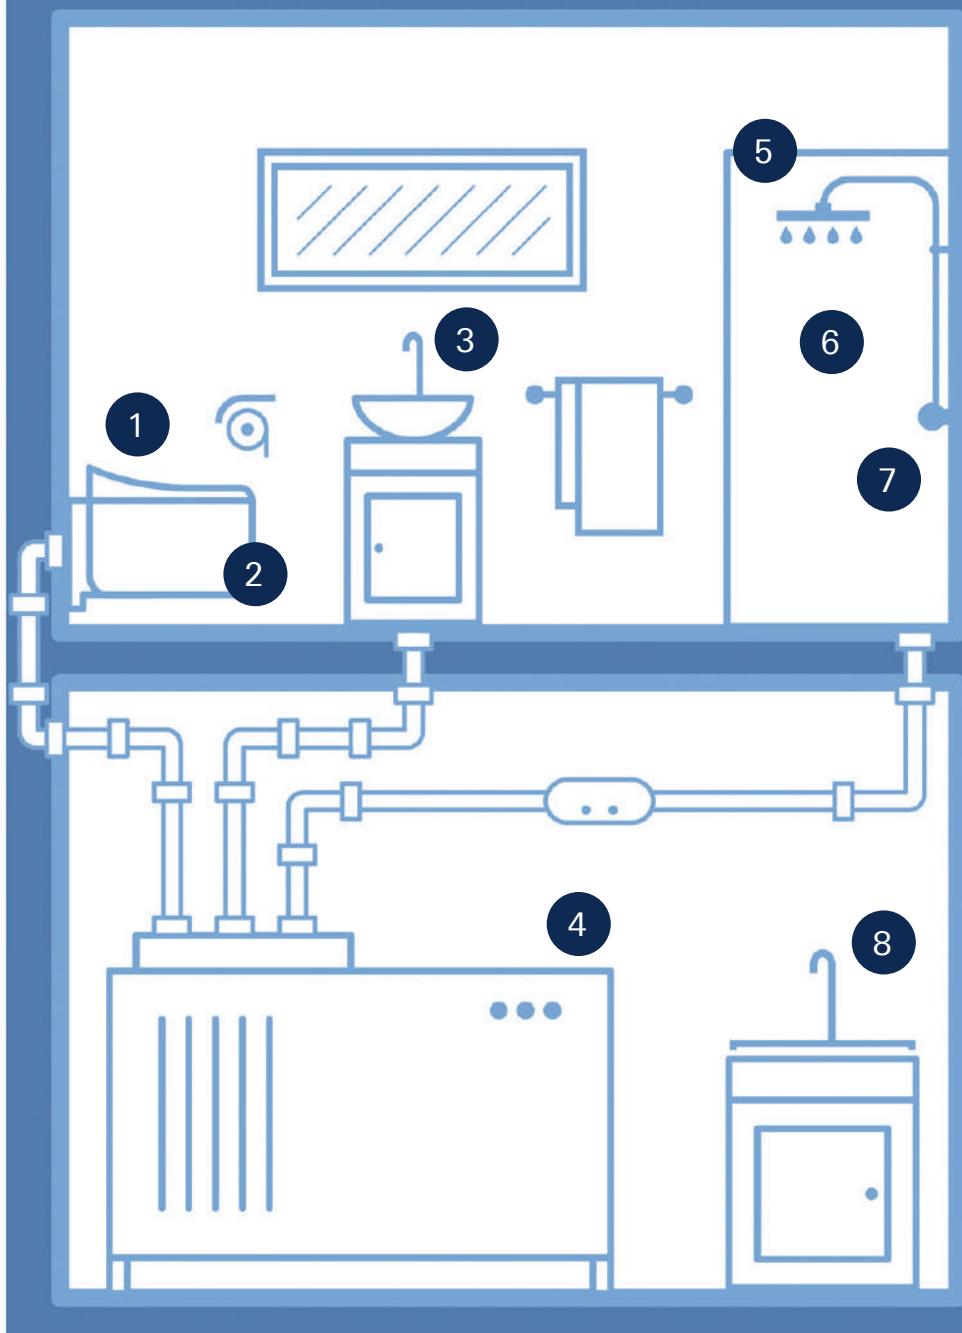

For more information about sustainability at GROHE, please visit green.grohe.com



GROHE BATH FITTINGS





CONTENTS

| | |
|--------------|-----|
| SmartControl | 112 |
| Fittings | 115 |
| | 121 |
| | 126 |
| | 132 |
| | 141 |
| | 144 |
| | 149 |
| | 153 |
| | 159 |
| | 163 |
| | 168 |
| | 174 |
| | 177 |
| | 182 |
| | 186 |
| | 190 |
| | 192 |
| | 193 |
| | 195 |
| | 197 |
| | 198 |
| | 199 |
| | 204 |
| | 207 |
| | 214 |
| | 218 |
| | 221 |


Two Handle fittings

| | |
|-------------|-----|
| Universal | 197 |
| Bath sets | 198 |
| Accessories | 199 |
| | 204 |
| | 207 |
| | 214 |
| | 218 |
| | 221 |


GROHE SMARTCONTROL MIXERS

Ref. no.


Colour




| | |
|--|---|
| 29 147 000 | chrome |
| SmartControl Concealed mixer with one valve final installation for GROHE Rapido SmartBox (35 604) GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable GROHE Long-Life finish GROHE SmartControl push for ON-OFF, turn for volume adjustment exchangeable symbols cartridge for temperature mixing outlet B = 27 l/min, outlet C = 27 l/min | |
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |



| | |
|--|---|
| 29 148 000 | chrome |
| SmartControl Concealed mixer with 2 valves final installation for GROHE Rapido SmartBox (35 604) GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable GROHE Long-Life finish GROHE SmartControl push for ON-OFF, turn for volume adjustment exchangeable symbols cartridge for temperature mixing multiple outlets can be run simultaneously outlet B = 23 l/min, outlet C = 25 l/min, outlet B+C = 27 l/min | |
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |





| | |
|--|---|
| 29 149 000 | chrome |
| SmartControl Concealed mixer with 3 valves final installation for GROHE Rapido SmartBox (35 604) GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable GROHE Long-Life finish GROHE SmartControl push for ON-OFF, turn for volume adjustment exchangeable symbols cartridge for temperature mixing multiple outlets can be run simultaneously outlet A = 22 l/min, outlet B = 26 l/min, outlet C = 22 l/min, outlet A+B = 31 l/min, outlet A+B+C = 34 l/min | |
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |



| | |
|--|---|
| 29 144 000 | chrome |
| SmartControl Concealed mixer with one valve final installation for GROHE Rapido SmartBox (35 604) GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable GROHE Long-Life finish GROHE SmartControl push for ON-OFF, turn for volume adjustment exchangeable symbols cartridge for temperature mixing outlet B = 27 l/min, outlet C = 27 l/min | |
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |

GROHE SMARTCONTROL MIXERS

| | Ref. no. | Colour |
|---|---|--------|
|  | 29 145 000 SmartControl Concealed mixer with 2 valves final installation for GROHE Rapido SmartBox (35 604) GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable GROHE Long-Life finish GROHE SmartControl push for ON-OFF, turn for volume adjustment exchangeable symbols cartridge for temperature mixing multiple outlets can be run simultaneously outlet B = 23 l/min, outlet C = 25 l/min, outlet B+C = 27 l/min | chrome |
|  | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation | |
|  | 29 146 000 SmartControl Concealed mixer with 3 valves final installation for GROHE Rapido SmartBox (35 604) GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable GROHE Long-Life finish GROHE SmartControl push for ON-OFF, turn for volume adjustment exchangeable symbols cartridge for temperature mixing multiple outlets can be run simultaneously outlet A = 22 l/min, outlet B = 26 l/min, outlet C = 22 l/min, outlet A+B = 31 l/min, outlet A+B+C = 34 l/min | chrome |
|  | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation | |
|  | 34 873 000 SmartControl Concealed shower system with Rainshower SmartActive 310 Cube consisting of: concealed mixer with 3 valves (29 149) GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604) Rainshower SmartActive 310 Cube head shower set 2 sprays (26 479) including horizontal shower arm 430 mm and hand shower rough-in (26 483) hand shower Euphoria Cube Stick, 1 spray (27 698) shower outlet elbow 1/2" with holder (26 659) Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) optional flow regulator 9.5 l/min included for hand shower | chrome |
|  | 34 709 000 SmartControl Perfect shower set concealed mixer with 3 valves SmartControl mixer (29 146) GROHE Rapido SmartBox (35 604) Rainshower SmartActive 310 head shower set (26 475), rough-in (26 483) Euphoria Cosmopolitan Stick hand shower 1 spray (27 367) Rainshower wall holder (27 074) Rainshower wall union 1/2" (27 057) Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) | chrome |
|  | 34 712 000 SmartControl Perfect shower set concealed mixer with 3 valves SmartControl mixer (29 149) GROHE Rapido SmartBox (35 604) Rainshower SmartActive 310 Cube head shower set (26 479), rough-in (26 483) hand shower Euphoria Cube Stick (27 698) Euphoria Cube wall union with integrated shower holder (26 370) Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) | chrome |

GROHE SMARTCONTROL MIXERS

Ref. no.

Colour



14 077 XH0

chrome/frosted granite


SmartControl

Caps concealed

9 caps with 6 different symbols

fits Grohtherm SmartControl and SmartControl mixer

GROHE LINEARE




Ref. no.

Colour

32 109 001 chrome
 32 109 DC1 supersteel
 32 109 AL1 brushed hard graphite

Lineare
Single-lever basin mixer 1/2"
XS-Size


GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE FastFixation Plus installation system pop-up waste set 1 1/4" flexible connection hoses



23 791 001 chrome
 23 791 DC1 supersteel
 23 791 AL1 brushed hard graphite

Lineare
Single-lever basin mixer 1/2"
XS-Size


GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE FastFixation Plus installation system smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses



32 114 001 chrome
 32 114 DC1 supersteel
 32 114 AL1 brushed hard graphite

Lineare
Single-lever basin mixer 1/2"
S-Size

GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE FastFixation Plus installation system pop-up waste set 1 1/4" flexible connection hoses




23 106 001 chrome
 23 106 DC1 supersteel
 23 106 AL1 brushed hard graphite


Lineare
Single-lever basin mixer 1/2"
S-Size

GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE FastFixation Plus installation system smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses


GROHE LINEARE




| Ref. no. | Colour |
|--|---|
| 23 296 001 23 296 DC1 23 296 AL1 | chrome supersteel brushed hard graphite |
| Lineare Single-lever basin mixer 1/2" L-Size GROHE SilkMove 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min SpeedClean mousseur GROHE FastFixation Plus installation system swivel spout with mousseur and stop limiter pop-up waste set 1 1/4" flexible connection hoses | |

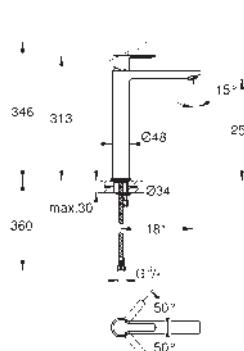

| 23 405 001 23 405 DC1 23 405 AL1 | chrome supersteel brushed hard graphite |
|---|---|
| Lineare Single-lever basin mixer 1/2" XL-Size for free-standing basins GROHE SilkMove 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min SpeedClean mousseur GROHE FastFixation Plus installation system smooth body flexible connection hoses | |




| 20 304 001 | chrome |
|--|--------|
| Lineare 3-hole basin mixer 1/2" M-Size ceramic headparts 1/2", 90° GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses between spout and side valves | |



| 19 409 001 19 409 DC1 19 409 AL1 | chrome supersteel brushed hard graphite |
|---|---|
| Lineare 2-hole basin mixer M-Size wall mounted final installation for 23 571 000 / 32 635 000 without concealed body metal rosette GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE AquaGuide adjustable mousseur centre distance 110 mm projection 149 mm | |
| 23 571 000 Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers | |

GROHE LINEARE



Ref. no.

Colour

23 444 001
23 444 DC1
23 444 AL1

chrome
supersteel
brushed hard graphite

Lineare
2-hole basin mixer
L-Size

wall mounted
final installation for 23 571 000 / 32 635 000
without concealed body

metal rosette


GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 207 mm

23 571 000

Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers



33 848 001
33 848 DC1
33 848 AL1

chrome
supersteel
brushed hard graphite


Lineare
Single-lever bidet mixer 1/2"
S-Size

GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min

GROHE FastFixation Plus installation system
ball-joint mousseur
pop-up waste set 1 1/4"
flexible connection hoses



33 865 001
33 865 DC1
33 865 AL1


chrome
supersteel
brushed hard graphite

Lineare
Single-lever shower mixer 1/2"
wall mounted

GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter

GROHE Long-Life finish

1/2" shower outlet
integrated non-return valve
covered S-unions
protected against backflow



33 849 001
33 849 DC1
33 849 AL1


chrome
supersteel
brushed hard graphite

Lineare
Single-lever bath mixer 1/2"
wall mounted

GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter

GROHE Long-Life finish
automatic diverter: bath/shower
mousseur
1/2" shower outlet
integrated non-return valve
covered S-unions
protected against backflow


GROHE LINEARE



Ref. no.

Colour


| | |
|---|--------|
| 33 850 001 | chrome |
| Lineare | |
| Single-lever bath mixer 1/2" | |
| wall mounted | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| with temperature limiter | |
| GROHE Long-Life finish | |
| automatic diverter: bath/shower | |
| mousseur | |
| 1/2" shower outlet | |
| integrated non-return valve | |
| covered S-unions | |
| protected against backflow | |
| with shower set | |
| metal stick hand shower | |
| wall shower holder Tempesta 100 Cosmopolitan (27 594) | |
| Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) | |



| | |
|------------|-----------------------|
| 24 063 001 | chrome |
| 24 063 DC1 | supersteel |
| 24 063 AL1 | brushed hard graphite |

Lineare
Single-lever shower mixer
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
outlet B or C = 30 l/min


| | |
|------------|--|
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|------------|--|



| | |
|------------|-----------------------|
| 24 064 001 | chrome |
| 24 064 DC1 | supersteel |
| 24 064 AL1 | brushed hard graphite |

Lineare
Single-lever mixer with 2-way diverter
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min

| | |
|------------|--|
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|------------|--|




| | |
|------------|-----------------------|
| 24 095 001 | chrome |
| 24 095 DC1 | supersteel |
| 24 095 AL1 | brushed hard graphite |

Lineare
Single-lever mixer with 3-way diverter
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
3-way diverter
outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min

| | |
|------------|--|
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|------------|--|

GROHE LINEARE



Ref. no. Colour

19 577 001 chrome
19 577 DC1 supersteel
19 577 AL1 brushed hard graphite

Lineare


4-hole bath combination

GROHE SilkMove 35 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish
pre-assembled spout fixing
single lever mixer operating element
bath inlet with mousseur
diverter bath/shower
metal stick hand shower
metal shower hose 2000 mm (always chrome for any colour of the set)
flexible connection hoses
connection for shower hose
protected against backflow
for use with 29 037

29 037 000
Baseframe for installation under tiled surround

45 388 000
Supporting legs for baseframe



19 965 001 chrome

Lineare


3-hole bath combination

Three hole installation
GROHE SilkMove 35 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish
single lever mixer operating element
diverter bath/shower
metal stick hand shower
metal shower hose 2000 mm (always chrome for any colour of the set)
flexible connection hoses
connection for shower hose
protected against backflow
for use with 29 037
for combination with 28 990 / 28 991

29 037 000
Baseframe for installation under tiled surround

45 388 000
Supporting legs for baseframe



23 792 001 chrome
23 792 DC1 supersteel
23 792 AL1 brushed hard graphite

Lineare

Single-lever bath mixer 1/2", floor mounted

final installation for 29 086 / 45 984


GROHE SilkMove 35 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish
automatic diverter: bath/shower
spout with mousseur
projection 271 mm
integrated non-return valve in shower outlet
with shower holder
metal stick hand shower
shower hose 1250 mm
protected against backflow

45 984 001 chrome
Rough-in set 1/2" for floor-mounted mixers/spouts

29 086 000
Rough-in set 1/2" for floor-mounted mixers/spouts

GROHE LINEARE



Ref. no.


Colour

13 383 001
13 383 DC1

chrome
supersteel

Lineare
Bath spout
wall mounted
GROHE Long-Life finish
mousseur
male thread 1/2"
projection 170 mm


GROHE EUROCUBE




Ref. no.

Colour


| | |
|---|--------|
| 23 137 000 | chrome |
| Eurocube | |
| Pillar tap XS-Size | |
| ceramic headpart | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| SpeedClean mousseur | |




| | |
|---|-----------------------|
| 23 127 00E | chrome |
| 23 127 DC0 | supersteel |
| 23 127 AL0 | brushed hard graphite |
| Eurocube | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation Plus installation system | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |



| | |
|---|--------|
| 23 132 00E | chrome |
| Eurocube | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| SpeedClean mousseur | |
| GROHE FastFixation Plus installation system | |
| smooth body | |
| flexible connection hoses | |




| | |
|---|-----------------------|
| 23 445 000 | chrome |
| 23 445 DC0 | supersteel |
| 23 445 AL0 | brushed hard graphite |
| Eurocube | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| with temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| SpeedClean mousseur | |
| GROHE FastFixation Plus installation system | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |




| | |
|---|--------|
| 23 446 000 | chrome |
| Eurocube | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| with temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| SpeedClean mousseur | |
| GROHE FastFixation Plus installation system | |
| smooth body | |
| flexible connection hoses | |


GROHE EUROCUBE



| Ref. no. | Colour |
|---|-----------------------|
| 23 135 00E | chrome |
| 23 135 DC0 | supersteel |
| 23 135 AL0 | brushed hard graphite |
| Eurocube | |
| Single-lever basin mixer 1/2" | |
| L-Size | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| SpeedClean mousseur | |
| GROHE FastFixation Plus installation system | |
| swivel tubular spout | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |




| Ref. no. | Colour |
|---|-----------------------|
| 23 406 000 | chrome |
| 23 406 DC0 | supersteel |
| 23 406 AL0 | brushed hard graphite |
| Eurocube | |
| Single-lever basin mixer 1/2" | |
| XL-Size | |
| for free-standing basins | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation Plus installation system | |
| smooth body | |
| flexible connection hoses | |








| Ref. no. | Colour |
|-------------------------------------|-----------------------|
| 19 895 000 | chrome |
| 19 895 DC0 | supersteel |
| 19 895 AL0 | brushed hard graphite |
| Eurocube | |
| 2-hole basin mixer | |
| S-Size | |
| wall mounted | |
| final installation for 23 200 | |
| without concealed body | |
| metal rosette | |
| GROHE Long-Life finish | |
| GROHE AquaGuide adjustable mousseur | |
| centre distance 110 mm | |
| projection 171 mm | |
| 23 447 000 | chrome |
| 23 447 DC0 | supersteel |
| 23 447 AL0 | brushed hard graphite |
| ditto, projection 231 mm | |

23 200 002
Rough-in for single-lever mixer, wall mount




| Ref. no. | Colour |
|---|--------|
| 23 138 000 | chrome |
| Eurocube | |
| Single-lever bidet mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation Plus installation system | |
| ball-joint mousseur | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |

GROHE EUROCUBE

| | Ref. no. | Colour |
|---|---|--|
|  | 23 145 000 23 145 DC0 23 145 AL0  | chrome supersteel brushed hard graphite Eurocube Single-lever shower mixer 1/2" wall mounted GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter shower bottom outlet with integrated non return-valve covered S-unions protected against backflow |
|  | 23 140 000 23 140 DC0 23 140 AL0  | chrome supersteel brushed hard graphite Eurocube Single-lever bath mixer 1/2" wall mounted GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower mousseur integrated non-return valve in shower outlet covered S-unions protected against backflow |
|  | 23 141 000  | chrome Eurocube Single-lever bath mixer 1/2" wall mounted GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower mousseur integrated non-return valve in shower outlet covered S-unions protected against backflow hand shower (27 698) wall shower holder (27 693) shower hose 1500 mm (28 151) |
|  | 24 061 000 24 061 DC0 24 061 AL0  | chrome supersteel brushed hard graphite Eurocube Single-lever shower mixer final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable outlet B or C = 30 l/min |
| | 35 604 000  | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|  | 24 062 000 24 062 DC0 24 062 AL0  | chrome supersteel brushed hard graphite Eurocube Single-lever mixer with 2-way diverter final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min |
| | 35 604 000  | GROHE Rapido SmartBox universal rough-in box for concealed installation |

GROHE EUROCUBE



Ref. no.

Colour

24 094 000
24 094 DC0
24 094 AL0

chrome
supersteel
brushed hard graphite

Eurocube

Single-lever mixer with 3-way diverter

final installation for

GROHE Rapido SmartBox (35 604)


GROHE SilkMove 46 mm ceramic cartridge

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

3-way diverter

outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



19 897 001
19 897 DC1
19 897 AL1

chrome
supersteel
brushed hard graphite

Eurocube

4-hole bath combination

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

pre-assembled spout fixing

single lever mixer operating element

bath inlet with mousseur

diverter bath/shower

hand shower Euphoria Cube+ 6.6 l/min

metal shower hose 2000 mm (always chrome for any colour of the set)

flexible connection hoses


connection for shower hose

protected against backflow

for use with 29 037

29 037 000
Baseframe for installation under tiled surround

45 388 000
Supporting legs for baseframe



23 672 001
23 672 DC1
23 672 AL1

chrome
supersteel
brushed hard graphite

Eurocube

Single-lever bath mixer 1/2", floor mounted

final installation for 45 984, 29 086

GROHE SilkMove 35 mm ceramic cartridge

with temperature limiter

GROHE Long-Life finish

automatic diverter: bath/shower

spout with mousseur

Euphoria Cube+ Stick hand shower 6.6 l/min (26 467)

Silverflex shower hose 1.250 mm (28 362)

projection 298 mm


integrated non-return valve in shower outlet

protected against backflow

with shower holder

45 984 001 chrome
Rough-in set 1/2" for floor-mounted mixers/spouts

29 086 000
Rough-in set 1/2" for floor-mounted mixers/spouts



13 303 000
13 303 DC0
13 303 AL0

chrome
supersteel
brushed hard graphite

Eurocube

Bath spout

wall mounted

GROHE Long-Life finish

mousseur

male thread 1/2"


projection 170 mm

GROHE

EUROCUBE

| | Ref. no. | Colour |
|---|--|---|
|  | 13 304 000 Eurocube Bath spout wall mounted GROHE Long-Life finish mousseur automatic diverter: bath/shower with concealed connection piece male thread 1/2" projection 170 mm | chrome |
|  | 19 910 000 Eurocube Volume Control Trim for concealed valves 29 800 1/2", 29 802 3/4", 29 805 1" without concealed body 16 - 38 mm metal handle sliding escutcheon with wall sealing GROHE Long-Life finish | chrome |
|  | 22 012 000 22 012 DC0 22 012 AL0 Eurocube Angle valve 1/2" wall connection 1/2" outlet thread 3/8" Cartridge headpart metal handle marking: neutral metal push-on escutcheon | chrome supersteel brushed hard graphite |
|  | 22 013 000 Eurocube Angle valve 1/2" wall connection 1/2" outlet 1/2" Cartridge headpart metal handle marking: neutral metal push-on escutcheon | chrome |

GROHE PLUS




Ref. no.

Colour

23 958 003
23 958 DC3

chrome
supersteel


GROHE Plus
**Single-lever basin mixer 1/2" with LED display
M-size**
colour LED water temperature display
infra-red diverter: mousseur / Eco spray
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur
rapid installation system
swivel spout with easy docking, swivel area 90°
smooth body with push-open pop-up waste set 1 1/4"
flexible connection hoses
1.5 V alkaline mono battery, 4 x mono cell, external battery



23 959 003

chrome


GROHE Plus
**Single-lever basin mixer 1/2" with LED display
L-Size**
colour LED water temperature display
infra-red diverter: mousseur / Eco spray
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur
rapid installation system
swivel spout with easy docking, swivel area 90°
smooth body with push-open pop-up waste set 1 1/4"
flexible connection hoses
1.5 V alkaline mono battery, 4 x mono cell, external battery



32 612 003
32 612 DC3
32 612 AL3

chrome
supersteel
brushed hard graphite

GROHE Plus
Single-lever basin mixer 1/2"
S-Size
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system
pop-up waste set 1 1/4"
flexible connection hoses




33 163 003

chrome


GROHE Plus
Single-lever basin mixer 1/2"
S-Size
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system
smooth body with push-open pop-up waste set 1 1/4"
flexible connection hoses

GROHE PLUS




| Ref. no. | Colour |
|------------|-----------------------|
| 23 871 003 | chrome |
| 23 871 DC3 | supersteel |
| 23 871 AL3 | brushed hard graphite |

GROHE Plus
Single-lever basin mixer 1/2"
M-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur rapid installation system swivel spout with easy docking, swivel area 90° pop-up waste set 1 1/4" flexible connection hoses




| | |
|------------|-----------------------|
| 23 872 003 | chrome |
| 23 872 DC3 | supersteel |
| 23 872 AL3 | brushed hard graphite |
| | |

GROHE Plus
Single-lever basin mixer 1/2"
M-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur rapid installation system swivel spout with easy docking, swivel area 90° smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses



| | |
|------------|-----------------------|
| 23 851 003 | chrome |
| 23 851 DC3 | supersteel |
| 23 851 AL3 | brushed hard graphite |
| | |


GROHE Plus
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur rapid installation system swivel spout with easy docking, swivel area 90° pop-up waste set 1 1/4" flexible connection hoses



| | |
|------------|-----------------------|
| 23 843 003 | chrome |
| 23 843 DC3 | supersteel |
| 23 843 AL3 | brushed hard graphite |
| | |


GROHE Plus
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur rapid installation system pull out spout
GROHE EasyDock easy retraction and smooth docking pop-up waste set 1 1/4" flexible connection hoses

GROHE PLUS




| Ref. no. | Colour |
|------------|--------|
| 23 844 003 | chrome |

GROHE Plus
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur rapid installation system
pull out spout
GROHE EasyDock easy retraction and smooth docking smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses




| | |
|------------|-----------------------|
| 32 618 003 | chrome |
| 32 618 DC3 | supersteel |
| 32 618 AL3 | brushed hard graphite |

GROHE Plus
Single-lever basin mixer 1/2"
XL-Size
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur rapid installation system
smooth body
flexible connection hoses



| | |
|------------|--------|
| 20 301 003 | chrome |
|------------|--------|

GROHE Plus
3-hole basin mixer 1/2"
M-Size
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur rapid installation system
pop-up waste set 1 1/4"
GROHE FastFixation installation system
flexible connection hoses between spout and side valves



| | |
|------------|-----------------------|
| 29 303 003 | chrome |
| 29 303 DC3 | supersteel |
| 29 303 AL3 | brushed hard graphite |


GROHE Plus
2-hole basin mixer
M-Size
wall mounted
final installation for 23 200 without concealed body
metal rosette
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE AquaGuide adjustable mousseur centre distance 110 mm projection 147 mm

| | |
|------------|--------|
| 29 306 003 | chrome |
|------------|--------|

ditto, projection 203 mm

| | |
|------------|---|
| 23 200 002 | Rough-in for single-lever mixer, wall mount |
|------------|---|


GROHE PLUS




Ref. no.

Colour


33 241 003 chrome
GROHE Plus
Single-lever bidet mixer 1/2"
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
rapid installation system
ball-joint mousseur
pop-up waste set 1 1/4"
flexible connection hoses



33 577 003 chrome
33 577 DC3 supersteel
33 577 AL3 brushed hard graphite
GROHE Plus
Single-lever shower mixer 1/2"
wall mounted
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
1/2" shower outlet
integrated non-return valve
covered S-unions
protected against backflow




33 553 003 chrome
33 553 DC3 supersteel
33 553 AL3 brushed hard graphite
GROHE Plus
Single-lever bath mixer 1/2"
wall mounted
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
automatic diverter: bath/shower
laminar mousseur
1/2" shower outlet
integrated non-return valve
covered S-unions
protected against backflow

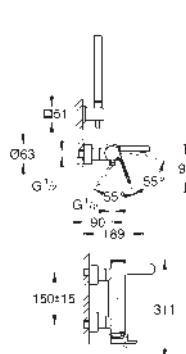

33 547 003 chrome
GROHE Plus
Single-lever bath mixer 1/2"
wall mounted
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
automatic diverter: bath/shower
laminar mousseur
1/2" shower outlet
integrated non-return valve
covered S-unions
protected against backflow
with shower set
hand shower Euphoria Cube Stick (27 698)
wall shower holder (27 693)
Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

GROHE PLUS



Ref. no.

Colour

24 059 003
24 059 DC3
24 059 AL3

chrome
supersteel
brushed hard graphite

GROHE Plus

Single-lever shower mixer

final installation for


GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable outlet B or C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



24 060 003
24 060 DC3
24 060 AL3

chrome
supersteel
brushed hard graphite

GROHE Plus

Single-lever mixer with 2-way diverter

final installation for


GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



24 093 003
24 093 DC3
24 093 AL3

chrome
supersteel
brushed hard graphite

GROHE Plus

Single-lever mixer with 3-way diverter

final installation for


GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable 3-way diverter outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



29 307 003
29 307 DC3
29 307 AL3

chrome
supersteel
brushed hard graphite

GROHE Plus

4-hole bath combination

GROHE SilkMove 35 mm ceramic cartridge

with temperature limiter

GROHE Long-Life finish

pre-assembled spout with laminar mousseur single lever mixer operating element

diverter bath/shower

hand shower Euphoria Cube 6.6 l/min

metal shower hose 2000 mm (always chrome for any colour of the set)

flexible connection hoses

connection for shower hose


protected against backflow

can be used with 29 037

29 037 002
Baseframe for installation under tiled surround

45 388 000
Supporting legs for baseframe

GROHE PLUS



Ref. no.

Colour

23 846 003 chrome
 23 846 DC3 supersteel
 23 846 AL3 brushed hard graphite

GROHE Plus

Single-lever bath mixer 1/2", floor mounted
 final installation for 45 984

GROHE SilkMove 35 mm ceramic cartridge

with temperature limiter

GROHE Long-Life finish

automatic diverter: bath/shower

spout with laminar mousseur

projection 282 mm

integrated non-return valve in shower outlet
 with shower holder


hand shower Euphoria Cube 6.6 l/min

Silverflex shower hose 1.250 mm (28 362)

protected against backflow

45 984 001 chrome
Rough-in set 1/2" for floor-mounted mixers/spouts

29 086 000
Rough-in set 1/2" for floor-mounted mixers/spouts



13 404 003 chrome
 13 404 DC3 supersteel
 13 404 AL3 brushed hard graphite

GROHE Plus**Bath spout**

wall mounted

GROHE Long-Life finish

laminar mousseur


male thread 1/2"

projection 168 mm

GROHE ESSENCE



PROFESSIONAL GROHE

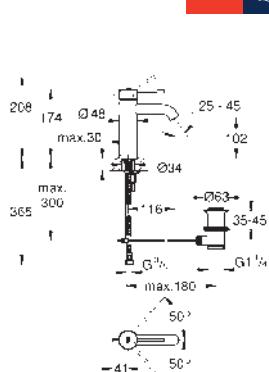


Ref. no.

Colour


| | |
|------------|-----------------------|
| 24 171 001 | chrome |
| 24 171 DC1 | supersteel |
| 24 171 GL1 | cool sunrise |
| 24 171 GN1 | brushed cool sunrise |
| 24 171 DA1 | warm sunset |
| 24 171 DL1 | brushed warm sunset |
| 24 171 A01 | hard graphite |
| 24 171 AL1 | brushed hard graphite |

Essence
Single-lever basin mixer 1/2"
S-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system
pop-up waste set 1 1/4"
flexible connection hoses
replaces Essence basin mixer 23 589 xx1




| | |
|------------|-----------------------|
| 24 172 001 | chrome |
| 24 172 DC1 | supersteel |
| 24 172 GL1 | cool sunrise |
| 24 172 GN1 | brushed cool sunrise |
| 24 172 DA1 | warm sunset |
| 24 172 DL1 | brushed warm sunset |
| 24 172 A01 | hard graphite |
| 24 172 AL1 | brushed hard graphite |
| 24 172 KF1 | phantom black |

Essence
Single-lever basin mixer 1/2"
S-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system
smooth body
flexible connection hoses
replaces Essence basin mixer 23 590 xx1



| | |
|--|--------|
| 24 175 001 | chrome |
| Essence | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 28 mm ceramic cartridge with temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation Plus installation system | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |
| replaces Essence basin mixer 32 898 001 | |




| | |
|--|--------|
| 34 813 001 | chrome |
| Essence | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 28 mm ceramic cartridge with temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation Plus installation system | |
| smooth body | |
| flexible connection hoses | |
| replaces Essence basin mixer 34 294 001 | |

GROHE ESSENCE



PROFESSIONAL GROHE



Ref. no.

Colour

| | |
|------------|-----------------------|
| 24 173 001 | chrome |
| 24 173 DC1 | supersteel |
| 24 173 GL1 | cool sunrise |
| 24 173 GN1 | brushed cool sunrise |
| 24 173 DA1 | warm sunset |
| 24 173 DL1 | brushed warm sunset |
| 24 173 A01 | hard graphite |
| 24 173 AL1 | brushed hard graphite |

Essence

Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove 28 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min

GROHE AquaGuide adjustable mousseur

GROHE FastFixation Plus installation system

swivel spout with mousseur and stop limiter

adjustable swivel area 0° / 150° / 360°


pop-up waste set 1 1/4"

flexible connection hoses

replaces Essence basin mixer 23 462 xx1



PROFESSIONAL GROHE



24 181 001

chrome

Essence

Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove 28 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min

GROHE AquaGuide adjustable mousseur

GROHE FastFixation Plus installation system

swivel spout with mousseur and stop limiter


adjustable swivel area 0° / 150° / 360°

smooth body

waste-set with push-open plug

flexible connection hoses

replaces Essence basin mixer 23 798 001



24 176 001

chrome
phantom black**Essence**

Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove 28 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min

GROHE AquaGuide adjustable mousseur

GROHE FastFixation Plus installation system

swivel spout with mousseur and stop limiter

adjustable swivel area 0° / 150° / 360°

smooth body


flexible connection hoses

replaces Essence basin mixer 23 463 001

GROHE ESSENCE



PROFESSIONAL GROHE



Ref. no.


Colour

| | |
|------------|-----------------------|
| 24 174 001 | chrome |
| 24 174 DC1 | supersteel |
| 24 174 GL1 | cool sunrise |
| 24 174 GN1 | brushed cool sunrise |
| 24 174 DA1 | warm sunset |
| 24 174 DL1 | brushed warm sunset |
| 24 174 A01 | hard graphite |
| 24 174 AL1 | brushed hard graphite |

Essence
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system swivel spout with mousseur and stop limiter adjustable swivel area 0° / 150° / 360° pop-up waste set 1 1/4" flexible connection hoses replaces Essence basin mixer 32 628 xx1




PROFESSIONAL GROHE



24 182 001 chrome


Essence
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system swivel spout with mousseur and stop limiter adjustable swivel area 0° / 150° / 360° smooth body waste-set with push-open plug flexible connection hoses replaces Essence basin mixer 23 799 001



24 177 001 chrome
24 177 KF1 phantom black


Essence
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system swivel spout with mousseur and stop limiter adjustable swivel area 0° / 150° / 360° smooth body flexible connection hoses replaces Essence basin mixer 23 541 001

GROHE ESSENCE




| Ref. no. | Colour |
|------------|-----------------------|
| 24 170 001 | chrome |
| 24 170 DC1 | supersteel |
| 24 170 GL1 | cool sunrise |
| 24 170 GN1 | brushed cool sunrise |
| 24 170 DA1 | warm sunset |
| 24 170 DL1 | brushed warm sunset |
| 24 170 A01 | hard graphite |
| 24 170 AL1 | brushed hard graphite |
| 24 170 KF1 | phantom black |

Essence
Single-lever basin mixer 1/2"
XL-Size
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 6.5 l/min
GROHE AquaGuide adjustable mousseur
GROHE FastFixation Plus installation system
swivel spout with mousseur and stop limiter
adjustable swivel area 0° / 90° / 360°
smooth body
flexible connection hoses
replaces Essence basin mixer 32 901 xx1



| | |
|------------|-----------------------|
| 20 296 001 | chrome |
| 20 296 DC1 | supersteel |
| 20 296 GL1 | cool sunrise |
| 20 296 GN1 | brushed cool sunrise |
| 20 296 DA1 | warm sunset |
| 20 296 DL1 | brushed warm sunset |
| 20 296 AL1 | brushed hard graphite |

Essence
3-hole basin mixer 1/2"
M-Size
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves




| | |
|------------|-----------------------|
| 29 192 001 | chrome |
| 29 192 DC1 | supersteel |
| 29 192 GL1 | cool sunrise |
| 29 192 GN1 | brushed cool sunrise |
| 29 192 DA1 | warm sunset |
| 29 192 DL1 | brushed warm sunset |
| 29 192 A01 | hard graphite |
| 29 192 AL1 | brushed hard graphite |
| 29 192 KF1 | phantom black |

Essence
2-hole basin mixer
M-Size
wall mounted
final installation for 23 571 000 / 32 635 000
without concealed body
metal rosette
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 183 mm
replaces Essence two-hole basin mixer 19 408 xx1

23 571 000
Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers

GROHE ESSENCE




Ref. no.

Colour

| | |
|------------|-----------------------|
| 29 193 001 | chrome |
| 29 193 DC1 | supersteel |
| 29 193 GL1 | cool sunrise |
| 29 193 GN1 | brushed cool sunrise |
| 29 193 DA1 | warm sunset |
| 29 193 DL1 | brushed warm sunset |
| 29 193 A01 | hard graphite |
| 29 193 AL1 | brushed hard graphite |
| 29 193 KF1 | phantom black |

Essence
2-hole basin mixer
L-Size
wall mounted
final installation for
23 571 000 / 32 635 000
without concealed body
metal rosette
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 230 mm
replaces Essence two-hole basin mixer 19 967 xx1


23 571 000
Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers




PROFESSIONAL GROHE

| | |
|------------|-----------------------|
| 24 178 001 | chrome |
| 24 178 DC1 | supersteel |
| 24 178 GL1 | cool sunrise |
| 24 178 GN1 | brushed cool sunrise |
| 24 178 DA1 | warm sunset |
| 24 178 DL1 | brushed warm sunset |
| 24 178 A01 | hard graphite |
| 24 178 AL1 | brushed hard graphite |

Essence
Single-lever bidet mixer 1/2"
S-Size
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation Plus installation system
ball-joint mousseur
pop-up waste set 1 1/4"
flexible connection hoses
replaces Essence bidet mixer 32 935 xx1




24 395 KF1 **phantom black**
Essence
Single-lever bidet mixer 1/2"
S-Size
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation Plus installation system
ball-joint mousseur
smooth body
flexible connection hoses




29 197 000 **chrome**
Essence
Single-lever shower mixer 1/2"
consisting of:
set for final installation
metal lever
concealed body
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
escutcheon- and shaft-sealings
optional temperature limiter

GROHE ESSENCE




| Ref. no. | Colour |
|------------|-----------------------|
| 25 252 001 | chrome |
| 25 252 DC1 | supersteel |
| 25 252 GL1 | cool sunrise |
| 25 252 GN1 | brushed cool sunrise |
| 25 252 DA1 | warm sunset |
| 25 252 DL1 | brushed warm sunset |
| 25 252 A01 | hard graphite |
| 25 252 AL1 | brushed hard graphite |
| 25 252 KF1 | phantom black |

Essence
Single-lever shower mixer 1/2"
 wall mounted
GROHE SilkMove 35 mm ceramic cartridge
 with temperature limiter
GROHE Long-Life finish
 1/2" shower outlet
 integrated non-return valve
 S-unions
 protected against backflow
 replaces Essence shower mixer 33 636 xx1



| | |
|------------|-----------------------|
| 25 250 001 | chrome |
| 25 250 DC1 | supersteel |
| 25 250 GL1 | cool sunrise |
| 25 250 GN1 | brushed cool sunrise |
| 25 250 DA1 | warm sunset |
| 25 250 DL1 | brushed warm sunset |
| 25 250 A01 | hard graphite |
| 25 250 AL1 | brushed hard graphite |
| 25 250 KF1 | phantom black |


Essence
Single-lever bath mixer 1/2"
 wall mounted
GROHE SilkMove 35 mm ceramic cartridge
 with temperature limiter
GROHE Long-Life finish
 automatic diverter: bath/shower
 mousseur
 1/2" shower outlet
 integrated non-return valve
 S-unions
 protected against backflow
 replaces Essence bath mixer 33 624 xx1



| | |
|------------|--------|
| 25 249 001 | chrome |
|------------|--------|

Essence
Single-lever bath mixer 1/2"
 wall mounted
GROHE SilkMove 35 mm ceramic cartridge
 with temperature limiter
GROHE Long-Life finish
 automatic diverter: bath/shower
 mousseur
 1/2" shower outlet
 integrated non-return valve
 S-unions
 protected against backflow
 with shower set
 Euphoria Cosmopolitan Stick hand shower 1 spray (27 367)
 wall shower holder Tempesta 100 Cosmopolitan (27 594)
 Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)
 replaces Essence bath mixer 33 628 001

GROHE ESSENCE



Ref. no.

Colour

| | |
|------------|-----------------------|
| 24 168 001 | chrome |
| 24 168 DC1 | supersteel |
| 24 168 GL1 | cool sunrise |
| 24 168 GN1 | brushed cool sunrise |
| 24 168 DA1 | warm sunset |
| 24 168 DL1 | brushed warm sunset |
| 24 168 A01 | hard graphite |
| 24 168 AL1 | brushed hard graphite |
| 24 168 KF1 | phantom black |

Essence

Single-lever shower mixer

final installation for

GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge


GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable outlet B or C = 30 l/min without roughing-in-set replaces Essence shower mixer 24 057 xx1



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



| | |
|------------|-----------------------|
| 24 167 001 | chrome |
| 24 167 DC1 | supersteel |
| 24 167 GL1 | cool sunrise |
| 24 167 GN1 | brushed cool sunrise |
| 24 167 DA1 | warm sunset |
| 24 167 DL1 | brushed warm sunset |
| 24 167 A01 | hard graphite |
| 24 167 AL1 | brushed hard graphite |
| 24 167 KF1 | phantom black |

Essence

Single-lever mixer with 2-way diverter

final installation for

GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge


GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min without roughing-in-set replaces Essence single-lever mixer with 2-way diverter 24 058 xx1



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



| | |
|------------|-----------------------|
| 24 169 001 | chrome |
| 24 169 DC1 | supersteel |
| 24 169 GL1 | cool sunrise |
| 24 169 GN1 | brushed cool sunrise |
| 24 169 DA1 | warm sunset |
| 24 169 DL1 | brushed warm sunset |
| 24 169 A01 | hard graphite |
| 24 169 AL1 | brushed hard graphite |

Essence

Single-lever mixer with 3-way diverter

final installation for

GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

3-way diverter

outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min

without roughing-in-set



replaces Essence single-lever mixer with 3-way diverter 24 092 xx1



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation

GROHE ESSENCE



| Ref. no. | Colour |
|------------|-----------------------|
| 25 251 001 | chrome |
| 25 251 DC1 | supersteel |
| 25 251 GL1 | cool sunrise |
| 25 251 GN1 | brushed cool sunrise |
| 25 251 DA1 | warm sunset |
| 25 251 DL1 | brushed warm sunset |
| 25 251 A01 | hard graphite |
| 25 251 AL1 | brushed hard graphite |
| 25 251 KF1 | phantom black |

Essence

4-hole bath combination

GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
pre-assembled spout fixing
single lever mixer operating element
bath inlet with mousseur
diverter bath/shower
Stick hand shower
metal shower hose 2000 mm (always chrome for any colour of the set)
flexible connection hoses
connection for shower hose
protected against backflow
for use with 29 037
replaces Essence four-hole bath combination 19 578 xx1

29 037 000

Baseframe for installation under tiled surround

45 388 000

Supporting legs for baseframe

| | |
|------------|--------|
| 19 976 001 | chrome |
|------------|--------|

Essence

3-hole bath combination

GROHE SilkMove 35 mm ceramic cartridge
GROHE Long-Life finish
single lever mixer operating element
diverter bath/shower
handshower (27 400)
metal shower hose 2000 mm (always chrome for any colour of the set)
flexible connection hoses
connection for shower hose
protected against backflow
for use with 29 037
for combination with 28 990 / 28 991

45 388 000

Supporting legs for baseframe


29 037 000

Baseframe for installation under tiled surround

GROHE ESSENCE

| Ref. no. | Colour |
|--|---|
| 25 248 001 25 248 DC1 25 248 GL1 25 248 GN1 25 248 DA1 25 248 DL1 25 248 A01 25 248 AL1 25 248 KF1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite phantom black |
| Essence Single-lever bath mixer 1/2", floor mounted final installation for 29 086 / 45 984 without roughing-in-set GROHE SilkMove 35 mm ceramic cartridge with temperature limiter GROHE Long-Life finish automatic diverter: bath/shower swivel spout with mousseur and stop limiter adjustable swivel area 0° / 150° / 360° projection 277 mm integrated non-return valve in shower outlet with shower holder metal stick hand shower Silverflex shower hose 1.250 mm (28 362) protected against backflow replaces Essence floor mounted bath mixer 23 491 xx1 | |
| 45 984 001 Rough-in set 1/2" for floor-mounted mixers/spouts | chrome |
| 29 086 000 Rough-in set 1/2" for floor-mounted mixers/spouts | |
| 13 449 001 13 449 DC1 13 449 GL1 13 449 GN1 13 449 DA1 13 449 DL1 13 449 A01 13 449 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| Essence Bath spout wall mounted mousseur male thread 1/2" GROHE Long-Life finish projection 221 mm | |


GROHE EURODISC COSMOPOLITAN




Ref. no.

Colour


33 190 20E chrome
Eurodisc Cosmopolitan
Single-lever basin mixer 1/2"
S-Size
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE FastFixation installation system
pop-up waste set 1 1/4"
flexible connection hoses




32 469 20E chrome
Eurodisc Cosmopolitan
Single-lever basin mixer 1/2"
S-Size
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE FastFixation installation system
smooth body
flexible connection hoses



23 448 002 chrome
Eurodisc Cosmopolitan
Single-lever basin mixer 1/2"
M-Size
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation Plus installation system
pop-up waste set 1 1/4"
flexible connection hoses



23 449 002 chrome
Eurodisc Cosmopolitan
Single-lever basin mixer 1/2"
M-Size
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
smooth body
flexible connection hoses




23 054 003 chrome
Eurodisc Cosmopolitan
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
GROHE Long-Life finish
GROHE FastFixation Plus installation system
mousseur
swivel tubular spout
adjustable swivel area 0° / 150° / 360°
pop-up waste set 1 1/4"
flexible connection hoses


GROHE EURODISC COSMOPOLITAN

Ref. no.

Colour




23 432 000 chrome
Eurodisc Cosmopolitan
Single-lever basin mixer 1/2"
XL-Size
for free-standing basins
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
SpeedClean mousseur
GROHE FastFixation Plus installation system
smooth body
flexible connection hoses



19 573 002 chrome
Eurodisc Cosmopolitan
2-hole basin mixer
M-Size
wall mounted
final installation for 23 571 000 / 32 635 000
without concealed body
metal rosette
GROHE Long-Life finish
GROHE AquaGuide
centre distance 110 mm
projection 170 mm


23 571 000
Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers



33 244 002 chrome
Eurodisc Cosmopolitan
Single-lever bidet mixer 1/2"
S-Size
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
ball-joint mousseur
pop-up waste set 1 1/4"
flexible connection hoses








33 569 002 chrome
Eurodisc Cosmopolitan
Single-lever shower mixer 1/2"
wall mounted
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
shower bottom outlet 1/2"
integrated non-return valve
S-unions
protected against backflow




33 390 002 chrome
Eurodisc Cosmopolitan
Single-lever bath mixer 1/2"
wall mounted
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
mousseur
integrated non-return valve in shower outlet
S-unions
protected against backflow

GROHE EURODISC COSMOPOLITAN

| | Ref. no. | Colour |
|---|--|--|
|  | 33 395 002 | chrome |
|  | Eurodisc Cosmopolitan Single-lever bath mixer 1/2" wall mounted GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower mousseur integrated non-return valve in shower outlet S-unions protected against backflow with shower set hand shower Euphoria 110 Champagne (27 222) wall shower holder (27 056) shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151) | |
|  | 24 055 002 | chrome |
|  | Eurodisc Cosmopolitan Single-lever shower mixer final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable outlet B or C = 30 l/min | |
|  | 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|  | 24 056 002 | chrome |
|  | Eurodisc Cosmopolitan Single-lever mixer with 2-way diverter final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min | |
|  | 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|  | 13 278 002 | chrome |
|  | Eurodisc Cosmopolitan Bath spout wall mounted GROHE Long-Life finish mousseur male thread 1/2" projection 170 mm | |
|  | 13 279 002 | chrome |
|  | Eurodisc Cosmopolitan Bath spout wall mounted GROHE Long-Life finish mousseur automatic diverter: bath/shower male thread 1/2" projection 170 mm | |

GROHE CONCETTO



Ref. no.

Colour

32 207 001

chrome

Concetto

Pillar tap XS-Size


ceramic headparts 1/2", 90°

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

SpeedClean mousseur



32 204 10E

chrome

Concetto

Single-lever basin mixer 1/2"

S-Size

GROHE SilkMove 28 mm ceramic cartridge

temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow


maximum flow rate (at 3 bar): 5 l/min

SpeedClean mousseur

GROHE FastFixation installation system

pop-up waste set 1 1/4"

flexible connection hoses



23 931 001

chrome

Concetto

Single-lever basin mixer 1/2"

S-Size

GROHE SilkMove 28 mm ceramic cartridge

adjustable flow rate limiter

temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow


maximum flow rate (at 3 bar): 5 l/min

SpeedClean mousseur

GROHE FastFixation installation system

smooth body with push-open pop-up waste set 1 1/4"

flexible connection hoses



23 450 001

chrome

Concetto

Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove 28 mm ceramic cartridge

with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow


maximum flow rate (at 3 bar): 5 l/min

SpeedClean mousseur

GROHE FastFixation installation system

pop-up waste set 1 1/4"

flexible connection hoses



23 932 001

chrome

Concetto

Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove 28 mm ceramic cartridge

temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow






maximum flow rate (at 3 bar): 5 l/min

GROHE FastFixation installation system

smooth body with push-open pop-up waste set 1 1/4"

flexible connection hoses


GROHE CONCETTO
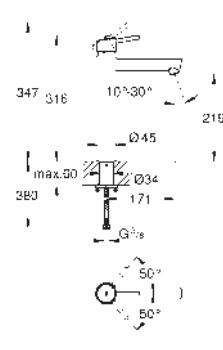
| | Ref. no. | Colour |
|---|--|--------|
|  | 23 739 002 | chrome |
|  | Concetto Single-lever basin mixer 1/2" L-Size GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system swivel tubular spout adjustable swivel area 0° / 150° / 360° pop-up waste set 1 1/4" flexible connection hoses | |
|  | 32 629 002 | chrome |
|  | Concetto Single-lever basin mixer 1/2" L-Size GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter GROHE Long-Life finish Lead and Nickel Free Inner Water Ways GROHE FastFixation installation system swivel tubular spout with stop restriction pop-up waste set 1 1/4" flexible connection hoses | |
|  | 23 920 001 | chrome |
|  | Concetto Single-lever basin mixer 1/2" XL-Size for free-standing basins GROHE SilkMove 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE AquaGuide adjustable mousseur rapid installation system smooth body flexible connection hoses | |
|  | 20 216 001 | chrome |
|  | Concetto 3-hole basin mixer 1/2" L-Size ceramic headpart GROHE Long-Life finish GROHE FastFixation installation system spout with mousseur pop-up waste set 1 1/4" pressure-proof, flexible connection hoses between spout and side valves | |
|  | 19 575 001 | chrome |
|  | Concetto 2-hole basin mixer S-Size wall mounted final installation for 23 571 000 / 32 635 000 without concealed body metal rosette GROHE Long-Life finish GROHE AquaGuide adjustable mousseur centre distance 110 mm projection 147 mm | |
| | 23 571 000 | |
| | Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers | |

GROHE CONCETTO

| | Ref. no. | Colour |
|---|--|--------|
|  | 32 208 001 Concetto Single-lever bidet mixer 1/2" S-Size GROHE SilkMove 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish GROHE FastFixation installation system ball-joint mousseur pop-up waste set 1 1/4" flexible connection hoses | chrome |
|  | 32 210 001 Concetto Single-lever shower mixer 1/2" wall mounted GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter shower bottom outlet with integrated non return-valve S-unions protected against backflow | chrome |
|  | 32 211 001 Concetto Single-lever bath mixer 1/2" wall mounted GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower mousseur integrated non-return valve in shower outlet S-unions protected against backflow | chrome |
|  | 32 212 001 Concetto Single-lever bath mixer 1/2" wall mounted GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower mousseur integrated non-return valve in shower outlet S-unions protected against backflow with shower set Euphoria Cosmopolitan hand shower (27 400) wall shower holder (27 056) shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151) | chrome |
|  | 24 053 001 Concetto Single-lever shower mixer final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable outlet B or C = 30 l/min | chrome |
| | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation | |

GROHE CONCETTO



Ref. no.

Colour

24 054 001

chrome


Concetto

Single-lever mixer with 2-way diverter
final installation for
GROHE Rapido SmartBox (35 604)

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min



35 604 000


GROHE Rapido SmartBox universal rough-in box for concealed installation

19 345 001

chrome

Concetto

Single-lever shower mixer
final installation for 33 964 000
without concealed body
GROHE Long-Life finish
escutcheon- and shaft-sealing
wall escutcheon
covered fixing




32 213 001

chrome

Concetto

Single-lever shower mixer 1/2"
wall installation
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
set for final installation
concealed body
33 964
adjustable flow rate limiter
adjustable minimum flow rate 2.5 l/min
escutcheon- and shaft-sealing
metal rosette
screwed
optional temperature limiter




19 346 001

chrome

Concetto

Single-lever bath mixer
final installation for 33 963 000
without concealed body
GROHE Long-Life finish
automatic diverter: bath/shower
escutcheon- and shaft-sealing
wall escutcheon
covered coupling




32 214 001

chrome

Concetto

Single-lever bath mixer 1/2"
wall installation
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
set for final installation
concealed body
33 963
adjustable flow rate limiter
adjustable minimum flow rate 2.5 l/min
escutcheon- and shaft-sealing
metal rosette
screwed
optional temperature limiter

GROHE CONCETTO



Ref. no.

Colour

19 576 002

chrome

Concetto

4-hole bath combination

GROHE SilkMove 46 mm ceramic cartridge

GROHE Long-Life finish

pre-assembled spout fixing

single lever mixer operating element

bath inlet with mousseur

diverter bath/shower

Euphoria Cosmopolitan hand shower 6.6 l/min

metal shower hose 2000 mm (always chrome for any colour of the set)

flexible connection hoses

connection for shower hose

protected against backflow


can be used with 29 037

45 388 000

Supporting legs for baseframe

29 037 000

Baseframe for installation under tiled surround



13 280 001

chrome

Concetto


Bath spout

wall mounted

GROHE Long-Life finish

mousseur

male thread 1/2"



13 281 001

chrome

Concetto

Bath spout with diverter

wall mounted


GROHE Long-Life finish

mousseur

automatic diverter: bath/shower

male thread 1/2"


GROHE EUROSTYLE COSMOPOLITAN



Ref. no.


Colour

| | |
|---|--------|
| 33 552 20E | chrome |
| Eurostyle Cosmopolitan | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| adjustable flow rate limiter | |
| temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| SpeedClean mousseur | |
| GROHE FastFixation installation system | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |




23 043 003 chrome

| | |
|--|--|
| Eurostyle Cosmopolitan | |
| Single-lever basin mixer 1/2" | |
| L-Size | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| adjustable flow rate limiter | |
| GROHE Long-Life finish | |
| Lead and Nickel Free Inner Water Ways | |
| GROHE FastFixation installation system | |
| mousseur | |
| swivel tubular spout with stop restriction | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |



20 208 002 chrome


| | |
|---|--|
| Eurostyle Cosmopolitan | |
| 3-hole wash-basin mixer | |
| S-Size | |
| ceramic headparts 1/2", 90° | |
| GROHE Long-Life finish | |
| GROHE FastFixation installation system | |
| spout with mousseur | |
| pop-up waste set 1 1/4" | |
| pressure-proof, flexible connection hoses between spout and side valves | |



19 571 002 chrome

| | |
|--|--|
| Eurostyle Cosmopolitan | |
| 2-hole basin mixer | |
| S-Size | |
| wall mounted | |
| final installation for 23 571 000 / 32 635 000 | |
| without concealed body | |
| metal rosette | |
| GROHE Long-Life finish | |
| GROHE AquaGuide adjustable mousseur | |
| centre distance 110 mm | |
| projection 171 mm | |

23 571 000
Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers




33 565 002 chrome

| | |
|---|--|
| Eurostyle Cosmopolitan | |
| Single-lever bidet mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| adjustable flow rate limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation installation system | |
| ball-joint mousseur | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |


GROHE EUROSTYLE COSMOPOLITAN

Ref. no.


Colour



33 590 002 chrome
Eurostyle Cosmopolitan
Single-lever shower mixer 1/2"
wall mounted
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
shower bottom outlet 1/2"
integrated non-return valve
S-unions
protected against backflow




33 591 002 chrome
Eurostyle Cosmopolitan
Single-lever bath mixer 1/2"
wall mounted
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
mousseur
integrated non-return valve in shower outlet
S-unions
protected against backflow




24 051 002 chrome
Eurostyle Cosmopolitan
Single-lever shower mixer
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
outlet B or C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed
installation








24 052 002 chrome
Eurostyle Cosmopolitan
Single-lever mixer with 2-way diverter
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed
installation



19 507 002 chrome
Eurostyle Cosmopolitan
Single-lever shower mixer
final installation for 33 964 000
without concealed body
GROHE Long-Life finish
escutcheon- and shaft-sealing
wall escutcheon
covered fixing


GROHE EUROSTYLE COSMOPOLITAN

| | Ref. no. | Colour |
|---|---|---|
|  | 33 635 002 | chrome |
|  | Eurostyle Cosmopolitan Single-lever shower mixer 1/2" wall installation GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish set for final installation concealed body 33 964 adjustable flow rate limiter adjustable minimum flow rate 2.5 l/min escutcheon- and shaft-sealing metal rosette screwed optional temperature limiter | |
|  | 19 506 002 | chrome |
|  | Eurostyle Cosmopolitan Single-lever bath mixer final installation for 33 963 000 without concealed body GROHE Long-Life finish automatic diverter: bath/shower escutcheon- and shaft-sealing wall escutcheon covered fixing | |
|  | 33 637 002 | chrome |
|  | Eurostyle Cosmopolitan Single-lever bath mixer 1/2" wall installation GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish set for final installation concealed body 33 963 adjustable flow rate limiter adjustable minimum flow rate 2.5 l/min escutcheon- and shaft-sealing metal rosette screwed optional temperature limiter | |
|  | 23 048 003 | chrome |
|  | Eurostyle Cosmopolitan 4-hole bath combination GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish pre-assembled spout fixing single lever mixer operating element bath inlet with mousseur diverter bath/shower Euphoria Cosmopolitan hand shower 6.6 l/min metal shower hose 2000 mm (always chrome for any colour of the set) flexible connection hoses connection for shower hose protected against backflow can be used with 29 037 | |
| | 45 388 000 | Supporting legs for baseframe |
| | 29 037 000 | Baseframe for installation under tiled surround |
|  | 13 276 002 | chrome |
|  | Eurostyle Cosmopolitan Bath spout wall mounted GROHE Long-Life finish mousseur male thread 1/2" projection 170 mm | |

GROHE EUROSTYLE COSMOPOLITAN

Ref. no.

Colour



13 277 002

chrome

Eurostyle Cosmopolitan

Bath spout

wall mounted

GROHE Long-Life finish


mousseur

automatic diverter: bath/shower

male thread 1/2"


projection 170 mm

GROHE EUROSTYLE




| Ref. no. | Colour |
|--|-----------------------------|
| 33 558 003 33 558 LS3 | chrome moon white/chrome |
| Eurostyle Single-lever basin mixer 1/2" S-Size | |


loop metal lever
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
pop-up waste set 1 1/4"
flexible connection hoses



| | |
|---|--------|
| 23 707 003 | chrome |
| Eurostyle Single-lever basin mixer 1/2" S-Size | |
| solid metal lever GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses | |




| | |
|---|--------|
| 23 564 003 | chrome |
| Eurostyle Single-lever basin mixer 1/2" S-Size | |
| loop metal lever GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min Lead and Nickel Free Inner Water Ways GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses | |




| | |
|---|--------|
| 23 569 003 | chrome |
| Eurostyle Single-lever basin mixer 1/2" L-Size | |
| loop metal lever GROHE SilkMove 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system swivel cast spout swivel area 360° pop-up waste set 1 1/4" flexible connection hoses | |

GROHE EUROSTYLE




Ref. no. Colour


23 718 003 chrome
Eurostyle
Single-lever basin mixer 1/2"
L-Size
solid metal lever
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
swivel cast spout
swivel area 360°
pop-up waste set 1 1/4"



23 570 003 chrome
23 570 LS3 moon white/chrome
Eurostyle
Single-lever basin mixer 1/2"
XL-Size
loop metal lever
for free-standing basins
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
smooth body
flexible connection hoses




23 719 003 chrome
Eurostyle
Single-lever basin mixer 1/2"
XL-Size
solid metal lever
for free-standing basins
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
smooth body
flexible connection hoses



19 571 003 chrome
Eurostyle
2-hole basin mixer
M-Size
wall mounted
without concealed body
final installation for 23 571 000 / 32 635 000
metal rosette
loop metal lever
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 203 mm

23 571 000
Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers

GROHE EUROSTYLE



Ref. no.

Colour


29 097 003 chrome

**Eurostyle
2-hole basin mixer**
M-Size


wall mounted
without concealed body
final installation for 23 571 000 / 32 635 000
metal rosette
solid metal lever
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 203 mm

23 571 000

Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers

33 565 003 chrome
33 565 LS3 moon white/chrome
**Eurostyle
Single-lever bidet mixer 1/2"**


S-Size
loop metal lever
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
with ball joint
pop-up waste set 1 1/4"
flexible connection hoses



23 720 003 chrome


**Eurostyle
Single-lever bidet mixer 1/2"**

S-Size
solid metal lever
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
with ball joint
pop-up waste set 1 1/4"
flexible connection hoses

33 590 003 chrome
33 590 LS3 moon white/chrome
**Eurostyle
Single-lever shower mixer 1/2"**

wall mounted
loop metal lever
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
adjustable flow rate limiter
shower outlet 1/2" with integrated non-return valve
covered S-unions
protected against backflow

GROHE EUROSTYLE




Ref. no.

Colour


23 722 003 chrome

Eurostyle
Single-lever shower mixer 1/2"
wall mounted
solid metal lever
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
adjustable flow rate limiter
shower outlet 1/2" with integrated non-return valve
covered S-unions
protected against backflow




33 591 003 chrome
33 591 LS3 moon white/chrome

Eurostyle
Single-lever bath mixer 1/2"
wall mounted
loop metal lever
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
mousseur
shower outlet 1/2" with integrated non-return valve
covered S-unions
protected against backflow



23 726 003 chrome


Eurostyle
Single-lever bath mixer 1/2"
wall mounted
solid metal lever
GROHE SilkMove 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
mousseur
shower outlet 1/2" with integrated non-return valve
covered S-unions
protected against backflow



24 048 003 chrome
24 048 LS3 moon white

Eurostyle
Single-lever shower mixer
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
outlet B or C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation








24 046 003 chrome


Eurostyle
Single-lever shower mixer
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
outlet B or C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation

GROHE EUROSTYLE

| | Ref. no. | Colour |
|--|--|---|
|  | 24 049 003 24 049 LS3 | chrome moon white |
|   | Eurostyle Single-lever mixer with 2-way diverter final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation |
|  | 24 047 003 | chrome |
|   | Eurostyle Single-lever mixer with 2-way diverter final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter outlet B = 27 l/min, outlet C = 27 l/min | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation |
|  | 19 507 003 | chrome |
|   | Eurostyle Single-lever shower mixer final installation for 33 964 000 without concealed body loop metal lever GROHE Long-Life finish GROHE FastFixation covered fixation escutcheon- and shaft-sealing metal wall escutcheon | |
|  | 29 098 003 | chrome |
|   | Eurostyle Single-lever shower mixer final installation for 33 964 000 without concealed body solid metal lever GROHE Long-Life finish GROHE FastFixation covered fixation escutcheon- and shaft-sealing metal wall escutcheon | |
|  | 19 506 003 | chrome |
|   | Eurostyle Single-lever bath mixer final installation for 33 963 000 without concealed body loop metal lever GROHE Long-Life finish GROHE FastFixation covered fixation automatic diverter: bath/shower escutcheon- and shaft-sealing metal wall escutcheon | |

GROHE EUROSTYLE



Ref. no.

Colour

29 099 003

chrome

Eurostyle

Single-lever bath mixer

final installation for 33 963 000

without concealed body

solid metal lever


GROHE Long-Life finish

GROHE FastFixation covered fixation


automatic diverter: bath/shower

escutcheon- and shaft-sealing


GROHE CUBEO




| Ref. no. | Colour |
|---|-----------------------|
| 101694 000 0 101694 243 0 | chrome matte black |
| GROHE Cubeo Single-lever basin mixer 1/2" S-Size single hole installation metal lever GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses | |



| | |
|---|-----------------------|
| 101699 000 0 101699 243 0 | chrome matte black |
| GROHE Cubeo Single-lever basin mixer 1/2" M-Size single hole installation metal lever GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses | |
| 101755 000 0 101755 243 0 | chrome matte black |




| | |
|--|-----------------------|
| 101729 000 0 101729 243 0 | chrome matte black |
| GROHE Cubeo Single-lever basin mixer 1/2" XL-Size single hole installation for free-standing basins metal lever GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE AquaGuide adjustable mousseur GROHE FastFixation installation system smooth body flexible connection hoses | |
| 101729 000 0 101729 243 0 | chrome matte black |



| | |
|---|-----------------------|
| 101810 000 0 101810 243 0 | chrome matte black |
| GROHE Cubeo Single-lever bidet mixer 1/2" S-Size single hole installation metal lever GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min with ball joint pop-up waste set 1 1/4" flexible connection hoses | |
| 101810 000 0 101810 243 0 | chrome matte black |

GROHE CUBEO

Ref. no. Colour




101813 000 0 chrome
101813 243 0 matte black

GROHE Cubeo
Single-lever bath mixer 1/2"
wall mounted
metal lever
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
automatic diverter: bath/shower
shower bottom outlet with integrated non return-valve
spout with mousseur
S-unions
wall escutcheon
protected against backflow




101814 000 0 chrome

GROHE Cubeo
Single-lever bath mixer 1/2"
wall mounted
metal lever
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
automatic diverter: bath/shower
shower bottom outlet with integrated non return-valve
spout with mousseur
S-unions
wall escutcheon
protected against backflow
with shower set
consisting of:
hand shower Tempesta Cube 110, 2 sprays (26 746)
wall shower holder (28 605)
shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151)



101824 000 0 chrome
101824 243 0 matte black




GROHE Cubeo
Single-lever shower mixer 1/2"
wall mounted
metal lever
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
shower bottom outlet with integrated non return-valve
protected against backflow
S-unions
wall escutcheon



101825 000 0 chrome


GROHE Cubeo
Single-lever shower mixer 1/2"
wall mounted
metal lever
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
adjustable flow rate limiter
shower bottom outlet with integrated non return-valve
protected against backflow
S-unions
wall escutcheon
with shower set
Tempesta Cube 110 shower rail set (26 748)

GROHE CUBEO


| | Ref. no. | Colour |
|---|--|-----------------------|
|  | 101777 000 0 101777 243 0 | chrome matte black |
|  | GROHE Cubeo Single-lever shower mixer final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable metal lever outlet B or C = 30 l/min without roughing-in-set | |
| | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation | |
|  | 101778 000 0 101778 243 0 | chrome matte black |
|  | GROHE Cubeo Single-lever mixer with 2-way diverter final installation for GROHE Rapido SmartBox (35 604) GROHE SilkMove 46 mm ceramic cartridge GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable automatic 2-way diverter metal lever outlet B = 27 l/min, outlet C = 27 l/min without roughing-in-set | |
| | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation | |
|  | 105334 000 0 105334 243 0 | chrome matte black |
|  | GROHE Cubeo Concealed shower system with Tempesta 250 final installation for GROHE Rapido SmartBox (35 604) consisting of: concealed single-lever shower mixer (101 777) Tempesta 250 Cube head shower set 9.5 l/min (26 687) including horizontal shower arm 380 mm without roughing-in-set | |
|  | 105335 000 0 105335 243 0 | chrome matte black |
|  | GROHE Cubeo Concealed shower system with Tempesta 110 final installation for GROHE Rapido SmartBox (35 604) consisting of: concealed single-lever shower mixer (101 777) Tempesta 110 shower rail set (26 748) shower outlet elbow (27 057) without roughing-in-set | |

**GROHE
CUEBO**

| Ref. no. | Colour |
|--|-----------------------|
| 105336 000 0 105336 243 0 | chrome matte black |
| GROHE Cubeo Concealed shower system with Tempesta 250 final installation for GROHE Rapido SmartBox (35 604) consisting of: concealed single-lever mixer with 2-way diverter (101 778) Tempesta 250 Cube head shower set 9.5 l/min (26 687) including horizontal shower arm 380 mm Tempesta Cube 110 wall holder set 3 sprays (26 910) without roughing-in-set | |




GROHE EUROCOSMO




Ref. no.

Colour


| | |
|--|--------|
| 32 825 00E | chrome |
| Eurocosmo | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min SpeedClean mousseur GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses | |




| | |
|---|--------|
| 23 925 000 | chrome |
| Eurocosmo | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter GROHE Long-Life finish GROHE FastFixation installation system GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses | |



| | |
|--|--------|
| 23 325 000 | chrome |
| Eurocosmo | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses | |




| | |
|---|-----------------------|
| 23 325 GLC | cool sunrise |
| 23 325 ALC | brushed hard graphite |
| Eurocosmo | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter GROHE Long-Life finish GROHE Water Saving mousseur 5.7 l/min GROHE FastFixation installation system pop-up waste set 1 1/4" flexible connection hoses | |




| | |
|---|--------|
| 23 926 000 | chrome |
| Eurocosmo | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE FastFixation installation system smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses | |

GROHE EUROCOSMO


Ref. no. Colour




32 830 001 chrome
Eurocosmo
Single-lever basin mixer 1/2"
L-Size
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE FastFixation installation system
mousseur
swivel tubular spout
pop-up waste set 1 1/4"
flexible connection hoses



23 921 000 chrome
Eurocosmo
Single-lever basin mixer 1/2"
XL-Size
for free-standing basins
GROHE SilkMove 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE AquaGuide adjustable mousseur
rapid installation system
smooth body
flexible connection hoses




20 187 000 chrome
Eurocosmo
3-hole basin mixer 1/2"
S-Size
ceramic headparts 1/2", 90°
GROHE Long-Life finish
GROHE FastFixation installation system
spout with mousseur
pop-up waste set 1 1/4"
flexible connection hoses between spout and side valves




19 381 000 chrome
Eurocosmo
2-hole basin mixer
S-Size
wall mounted
final installation for 23 571 000 / 32 635 000
without concealed body
metal rosette
GROHE Long-Life finish
GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 170 mm

23 571 000
Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers



19 381 GLC
19 381 ALC cool sunrise
brushed hard graphite
Eurocosmo
2-hole basin mixer
S-Size
wall mounted
final installation for 23 571 000 / 32 635 000
without concealed body
metal rosette
GROHE Long-Life finish
GROHE AquaGuide adjustable mousseur
centre distance 110 mm
projection 170 mm


GROHE EUROCOSMO




Ref. no.

Colour


| | |
|---|--------|
| 32 839 000 | chrome |
| Eurocosmo | |
| Single-lever bidet mixer 1/2" | |
| S-Size | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| adjustable flow rate limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation installation system | |
| ball-joint mousseur | |
| pop-up waste set 1 1/4" | |
| flexible connection hoses | |




| | |
|---|-----------------------|
| 32 837 000 | chrome |
| 32 837 GLO | cool sunrise |
| 32 837 AL0 | brushed hard graphite |
| Eurocosmo | |
| Single-lever shower mixer 1/2" | |
| wall mounted | |
| GROHE SilkMove 46 mm ceramic cartridge | |
| GROHE Long-Life finish | |
| adjustable flow rate limiter | |
| shower bottom outlet with integrated non return-valve | |
| S-unions | |
| protected against backflow | |



| | |
|--|-----------------------|
| 32 831 000 | chrome |
| 32 831 GLO | cool sunrise |
| 32 831 AL0 | brushed hard graphite |
| Eurocosmo | |
| Single-lever bath mixer 1/2" | |
| wall mounted | |
| GROHE SilkMove 46 mm ceramic cartridge | |
| GROHE Long-Life finish | |
| adjustable flow rate limiter | |
| automatic diverter: bath/shower | |
| mousseur | |
| integrated non-return valve in shower outlet | |
| S-unions | |
| protected against backflow | |



| | |
|---|--------|
| 32 832 000 | chrome |
| Eurocosmo | |
| Single-lever bath mixer 1/2" | |
| wall mounted | |
| GROHE SilkMove 46 mm ceramic cartridge | |
| GROHE Long-Life finish | |
| adjustable flow rate limiter | |
| automatic diverter: bath/shower | |
| mousseur | |
| integrated non-return valve in shower outlet | |
| S-unions | |
| protected against backflow | |
| with shower set | |
| Euphoria Cosmopolitan hand shower (27 367) | |
| wall shower holder (27 056) | |
| shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151) | |




PROFESSIONAL GROHE

| | |
|---|--------|
| 24 044 000 | chrome |
| Eurocosmo | |
| Single-lever shower mixer | |
| final installation for | |
| GROHE Rapido SmartBox (35 604) | |
| GROHE SilkMove 46 mm ceramic cartridge | |
| GROHE Long-Life finish | |
| GROHE FastFixation escutcheon with covered shaft sealing and covered fixing | |
| metal escutcheon, retroactively 6° adjustable | |
| outlet B or C = 30 l/min | |

| | |
|--------------|--|
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed |
| installation | |

GROHE EUROCOSMO




Ref. no.

Colour

24 045 000
24 045 GL0
24 045 AL0
chrome
cool sunrise
brushed hard graphite

Eurocosmo
Single-lever mixer with 2-way diverter
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min


35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



24 226 000 chrome


Eurocosmo
Single-lever mixer with 3-way diverter
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal lever
3-way diverter
outlet A = 27 l/min, outlet B = 27 l/min, outlet C = 27 l/min
without roughing-in-set

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation




19 383 000 chrome

Eurocosmo
Single-lever shower mixer
final installation for 33 964 000
without concealed body
GROHE Long-Life finish
escutcheon- and shaft-sealing
wall escutcheon
covered fixing



32 880 000 chrome

Eurocosmo
Single-lever shower mixer 1/2"
wall installation
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
set for final installation
concealed body
adjustable flow rate limiter
adjustable minimum flow rate 2.5 l/min
escutcheon- and shaft-sealing
metal rosette
screwed
optional temperature limiter




19 382 000 chrome

Eurocosmo
Single-lever bath mixer
final installation for 33 963 000
without concealed body
GROHE Long-Life finish
automatic diverter: bath/shower
escutcheon- and shaft-sealing
wall escutcheon
covered fixing


GROHE

EUROCOSMO




Ref. no. Colour

| | |
|---|--------|
| 32 879 000 | chrome |
| Eurocosmo | |
| Single-lever bath mixer 1/2" | |
| wall installation | |
| GROHE SilkMove 46 mm ceramic cartridge | |
| GROHE Long-Life finish | |
| set for final installation | |
| concealed body | |
| adjustable flow rate limiter | |
| adjustable minimum flow rate 2.5 l/min | |
| automatic diverter: bath/shower | |
| metal wall escutcheon | |
| screwed | |
| optional temperature limiter | |



13 261 000 chrome
13 261 GLO cool sunrise
13 261 AL0 brushed hard graphite


| | |
|-------------------------------|--|
| Eurocosmo | |
| Bath spout | |
| wall mounted | |
| GROHE Long-Life finish | |
| male thread 1/2" | |
| projection 170 mm | |



13 262 000 chrome

| | |
|---------------------------------|--|
| Eurocosmo | |
| Bath spout | |
| wall mounted | |
| GROHE Long-Life finish | |
| automatic diverter: bath/shower | |
| male thread 1/2" | |
| projection 170 mm | |

GROHE EUROSMART



Ref. no.

Colour

33 265 003
33 265 2433

chrome
matte black

Eurosmart
Single-lever basin mixer 1/2"

S-Size

GROHE SilkMove 28 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
Lead and Nickel Free Inner Water Ways
GROHE FastFixation installation system
flexible connection hoses
pop-up waste set 1 1/4"

23 922 003
23 922 2433


chrome
matte black

ditto, smooth body with push-open pop-up waste set 1 1/4"

32 467 003
32 467 2433

chrome
matte black

ditto, smooth body




23 124 003

chrome

Eurosmart
Single-lever basin mixer 1/2"

S-Size

GROHE SilkMove 28 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
GROHE FastFixation installation system
smooth body
flexible connection hoses
with shower set consisting of
hand shower with integrated diverter
wall shower holder



32 926 2433


matte black

Eurosmart
Single-lever basin mixer 1/2"

S-Size


GROHE SilkMove Energy Saving 28 mm ceramic cartridge
with energy saving function via cold start
adjustable flow rate limiter
with temperature limiter
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
Lead and Nickel Free Inner Water Ways
GROHE FastFixation installation system
pop-up waste set 1 1/4"
lift rod in lateral position
flexible connection hoses
professional edition

GROHE EUROSMART



Ref. no. Colour

| | |
|--|-----------------------|
| 23 975 003 23 975 2433 | chrome matte black |
| Eurosmart | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| single hole installation | |
| 2-in-1 hybrid with touchless or manual operation | |
| manual lever operation having priority | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| with temperature limiter | |
| infra-red electronic | |
| with infrared sensor for bi-directional communication | |
| for monitoring, configuration and service purpose | |
| 6V lithium battery, type CR-P2 | |
| battery lifetime: approx. 7 years (150 actuations a day) | |
| non-return valve | |
| dirt strainers | |
| integrated solenoid valve | |
| external battery | |
| multistage battery status display | |
| 7 pre-set programs: | |
| auto flush | |
| cleaning mode | |
| additional functions and precise settings by remote control 36 407 | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| Lead and Nickel Free Inner Water Ways | |
| rapid installation system | |
| smooth body | |
| flexible connection hoses | |
| minimum pressure 1.0 bar | |
| CE approved | |



23 322 003
23 322 2433

chrome
matte black

Eurosmart
Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove 28 mm ceramic cartridge

adjustable flow rate limiter

with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

Lead and Nickel Free Inner Water Ways

GROHE FastFixation installation system

pop-up waste set 1 1/4"

flexible connection hoses


23 923 003
ditto, smooth body with push-open pop-up waste set 1 1/4"

chrome

23 324 003
23 324 2433

chrome
matte black

ditto, smooth body



23 393 243E

matte black

Eurosmart
Single-lever basin mixer 1/2"

M-Size

GROHE SilkMove Energy Saving 28 mm ceramic cartridge

with energy saving function via cold start

adjustable flow rate limiter

with temperature limiter

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

Lead and Nickel Free Inner Water Ways


GROHE FastFixation installation system

pop-up waste set 1 1/4"

flexible connection hoses


professional edition

GROHE EUROSMART




Ref. no. Colour

| | |
|--|--------|
| 23 976 003 | chrome |
| Eurosmart Single-lever basin mixer 1/2" | |
| M-Size pull out spout single hole installation metal lever | |
| GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter with temperature limiter | |
| GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min | |
| GROHE Magnetic Docking guarantees easy retraction and smooth docking smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses | |




| | |
|---|--------|
| 23 537 003 | chrome |
| Eurosmart Single-lever basin mixer 1/2" | |
| L-Size GROHE SilkMove 28 mm ceramic cartridge with temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min | |
| GROHE FastFixation installation system swivel tubular spout pop-up waste set 1 1/4" flexible connection hoses | |

| | |
|---|--------|
| 23 970 003 | chrome |
| ditto, smooth body with push-open pop-up waste set 1 1/4" | |







| | |
|---|-------------|
| 23 971 003 | chrome |
| 23 971 2433 | matte black |
| Eurosmart Single-lever basin mixer 1/2" | |
| XL-Size for free-standing basins | |
| GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter with temperature limiter | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min | |
| GROHE AquaGuide adjustable mousseur GROHE FastFixation installation system smooth body flexible connection hoses | |




| | |
|---|--------|
| 29 337 003 | chrome |
| Eurosmart 2-hole basin mixer | |
| S-Size wall mounted | |
| without concealed body final installation for 23 571 000 / 32 635 000 | |
| metal rosette | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min | |
| GROHE AquaGuide adjustable mousseur centre distance 110 mm projection 171 mm | |

| | |
|------------|---|
| 23 571 000 | Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers |
|------------|---|

GROHE EUROSMART

| | Ref. no. | Colour |
|---|---|---|
|  | 29 338 003 29 338 2433 | chrome matte black |
|  | Eurosmart 2-hole basin mixer M-Size wall mounted without concealed body final installation for 23 571 000 / 32 635 000 metal rosette GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min GROHE AquaGuide adjustable mousseur centre distance 110 mm projection 211 mm | 23 571 000 Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers |
|  | 32 929 003 32 929 2433 | chrome matte black |
|  | Eurosmart Single-lever bidet mixer 1/2" S-Size GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min Lead and Nickel Free Inner Water Ways GROHE FastFixation installation system with ball joint pop-up waste set 1 1/4" flexible connection hoses | 32 929 003 32 929 2433 |
|  | 33 555 003 33 555 2433 | chrome matte black |
|  | Eurosmart Single-lever shower mixer 1/2" wall mounted GROHE SilkMove 35 mm ceramic cartridge adjustable flow rate limiter with temperature limiter GROHE Long-Life finish shower bottom outlet with integrated non return-valve S-unions metal wall escutcheons protected against backflow | 33 555 003 33 555 2433 |
|  | 32 172 2433 | matte black |
|  | Eurosmart Single-lever shower mixer 1/2" wall mounted GROHE SilkMove 35 mm ceramic cartridge with Eco-Override-Stop adjustable flow rate limiter with temperature limiter shower bottom outlet with integrated non return-valve S-unions metal wall escutcheons protected against backflow professional edition | 32 172 2433 |

GROHE EUROSMART



Ref. no.


Colour

33 300 003
33 300 2433

chrome
matte black

Eurosmart
Single-lever bath mixer 1/2"

wall mounted
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
with temperature limiter
GROHE Long-Life finish
automatic diverter: bath/shower
mousseur
integrated non-return valve in shower outlet
S-unions
metal wall escutcheons
protected against backflow



24 042 003


chrome

Eurosmart
Single-lever shower mixer

final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
outlet B or C = 30 l/min
without roughing-in-set

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



24 043 003


chrome

Eurosmart

Single-lever mixer with 2-way diverter
final installation for
GROHE Rapido SmartBox (35 604)
GROHE SilkMove 46 mm ceramic cartridge
GROHE Long-Life finish
GROHE FastFixation escutcheon with covered shaft sealing and covered fixing
metal escutcheon, retroactively 6° adjustable
automatic 2-way diverter
outlet B = 27 l/min, outlet C = 27 l/min
without roughing-in-set

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation

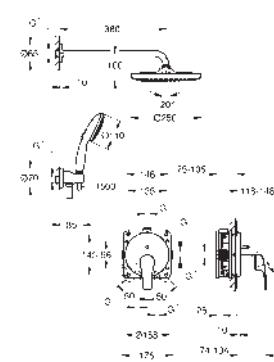

25 288 000






chrome

Eurosmart


Concealed shower system with Tempesta 250

consisting of:
concealed single-lever mixer with 2-way diverter (24 043)
GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)
Tempesta 250 head shower set 9.5 l/min (26 668) including horizontal shower arm
380 mm
Tempesta 110 hand shower 2 sprays (27 597)
shower outlet elbow 1/2" with wall shower holder (28 679)
Rotaflex shower hose 1500 mm 1/2" x 1/2" (28 409)
optional flow regulator 9.5 l/min included for hand shower

GROHE EUROSMART


| | Ref. no. | Colour |
|---|--|-----------------------|
|  | 19 451 003 19 451 2433 | chrome matte black |
|  | Eurosmart Single-lever shower mixer final installation for 33 964 000 without concealed body GROHE Long-Life finish GROHE FastFixation escutcheon with covered fixation escutcheon- and shaft-sealing metal wall escutcheon | |
|  | 19 450 003 19 450 2433 | chrome matte black |
|  | Eurosmart Single-lever bath mixer final installation for 33 963 000 without concealed body GROHE Long-Life finish GROHE FastFixation escutcheon with covered fixation automatic diverter: bath/shower escutcheon- and shaft-sealing metal wall escutcheon | |
|  | 33 556 003 | chrome |
|  | Eurosmart Single-lever shower mixer 1/2" wall installation GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered fixation set for final installation (19 451 003) with concealed body adjustable flow rate limiter escutcheon- and shaft-sealing metal wall escutcheon optional temperature limiter | |
|  | 33 305 003 | chrome |
|  | Eurosmart Single-lever bath mixer 1/2" wall installation GROHE SilkMove 46 mm ceramic cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered fixation set for final installation (19 450 003) with concealed body adjustable flow rate limiter automatic diverter: bath/shower metal rosette escutcheon- and shaft-sealing optional temperature limiter | |
|  | 13 448 003 13 448 2433 | chrome matte black |
|  | Eurosmart Bath spout wall mounted GROHE Long-Life finish mousseur male thread 1/2" projection 171 mm | |

GROHE EUROSMART CARE




Ref. no. Colour


| | |
|--|---------------|
| 23 988 003 Eurosmart Single-lever basin mixer 1/2" S-Size thermostatic scalding protection maximum temperature adjustable single hole installation lever length 89 mm GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter GROHE Long-Life finish Lead and Nickel Free Inner Water Ways built-in non-return valves dirt strainers GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 4 l/min GROHE FastFixation installation system smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses max. pressure differential 5:1 | chrome |
|--|---------------|



| | |
|---|---------------|
| 23 989 003 Eurosmart Single-lever basin mixer 1/2" M-Size thermostatic scalding protection maximum temperature adjustable lever length 89 mm GROHE SilkMove 28 mm ceramic cartridge adjustable flow rate limiter Lead and Nickel Free Inner Water Ways built-in non-return valves dirt strainers GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 4 l/min GROHE FastFixation installation system smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses max. pressure differential 5:1 | chrome |
|---|---------------|



| | |
|--|---------------|
| 23 980 003 Eurosmart Single-lever basin mixer 1/2" S-Size single hole installation loop metal lever lever length 130 mm GROHE SilkMove 35 mm ceramic cartridge maximum flow rate (at 3 bar): 8 l/min laminar flow straightener adjustable flow rate limiter with temperature limiter GROHE FastFixation installation system smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses | chrome |
|--|---------------|




| | |
|--|---------------|
| 23 981 003 Eurosmart Single-lever basin mixer 1/2" M-Size single hole installation loop metal lever lever length 130 mm GROHE SilkMove 35 mm ceramic cartridge maximum flow rate (at 3 bar): 8 l/min laminar flow straightener adjustable flow rate limiter with temperature limiter GROHE FastFixation installation system smooth body with push-open pop-up waste set 1 1/4" flexible connection hoses | chrome |
|--|---------------|


GROHE

EUROSMART CARE


Ref. no. Colour




25 241 003 chrome
Eurosmart
Single-lever bath mixer 1/2"
 wall mounted
 loop metal lever
 lever length 123 mm
GROHE SilkMove 35 mm ceramic cartridge
 adjustable flow rate limiter
 with temperature limiter
 automatic diverter: bath/shower
 mousseur
 integrated non-return valve in shower outlet
 S-unions
 metal wall escutcheons
 protected against backflow




25 242 003 chrome
Eurosmart
Single-lever shower mixer 1/2"
 wall mounted
 loop metal lever
 lever length 115 mm
GROHE SilkMove 35 mm ceramic cartridge
 adjustable flow rate limiter
 with temperature limiter
 shower bottom outlet with integrated non return-valve
 S-unions
 metal wall escutcheons
 protected against backflow



23 982 003 chrome
Eurosmart
Single-lever basin mixer 1/2"
S-Size
 long metal lever
 lever length 156 mm
GROHE SilkMove 35 mm ceramic cartridge
 maximum flow rate (at 3 bar): 8 l/min
 laminar flow straightener
 adjustable flow rate limiter
 with temperature limiter
GROHE FastFixation installation system
 smooth body with push-open pop-up waste set 1 1/4"
 flexible connection hoses



23 983 003 chrome
Eurosmart
Single-lever basin mixer 1/2"
M-Size
 long metal lever
 lever length 156 mm
GROHE SilkMove 35 mm ceramic cartridge
 maximum flow rate (at 3 bar): 8 l/min
 laminar flow straightener
 adjustable flow rate limiter
 with temperature limiter
GROHE FastFixation installation system
 smooth body with push-open pop-up waste set 1 1/4"
 flexible connection hoses



25 243 003 chrome
Eurosmart
Single-lever bath mixer 1/2"
 wall mounted
 long metal lever
 lever length 124 mm
GROHE SilkMove 35 mm ceramic cartridge
 adjustable flow rate limiter
 with temperature limiter
 automatic diverter: bath/shower
 mousseur
 integrated non-return valve in shower outlet
 S-unions
 metal wall escutcheons
 protected against backflow

GROHE EUROSMART CARE







Ref. no.


Colour

| | |
|---|--------|
| 25 244 003 | chrome |
| Eurosmart | |
| Single-lever shower mixer 1/2" | |
| wall mounted | |
| long metal lever | |
| lever length 120 mm | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| adjustable flow rate limiter | |
| with temperature limiter | |
| shower bottom outlet with integrated non return-valve | |
| S-unions | |
| metal wall escutcheons | |
| protected against backflow | |

GROHE EUROECO


| | Ref. no. | Colour |
|---|--|--------|
|  | 20 616 001 | chrome |
|  | Euroeco Pillar tap 1/2" XS-Size ceramic headpart GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min | |
|  | 23 262 001 | chrome |
|  | Euroeco Single-lever basin mixer 1/2" S-Size GROHE Long-Life 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish Lead and Nickel Free Inner Water Ways GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min rapid installation system plastic pop-up waste set 1 1/4" flexible connection hoses | |
|  | 32 734 001 | chrome |
|  | Euroeco Single-lever basin mixer 1/2" S-Size GROHE Long-Life 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish Lead and Nickel Free Inner Water Ways GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min rapid installation system smooth body flexible connection hoses | |
|  | 24 256 001 | chrome |
|  | Euroeco Single-lever basin mixer 1/2" S-Size GROHE Long-Life 28 mm ceramic cartridge with temperature limiter GROHE Long-Life finish Lead and Nickel Free Inner Water Ways GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min rapid installation system smooth body with plastic push open waste set 1 1/4" flexible connection hoses | |
|  | 24 257 001 | chrome |
|  | Euroeco Single-lever basin mixer 1/2" S-Size GROHE Long-Life ES 28 mm ceramic cartridge with energy saving function via cold start with temperature limiter GROHE Long-Life finish Lead and Nickel Free Inner Water Ways GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min rapid installation system pop-up waste set 1 1/4" flexible connection hoses | |

GROHE EUROECO




Ref. no. Colour


| | |
|--|---------------|
| 24 258 001 | chrome |
| Euroeco | |
| Single-lever basin mixer 1/2" | |
| S-Size | |
| GROHE Long-Life ES 28 mm ceramic cartridge with energy saving function via cold start | |
| with temperature limiter | |
| GROHE Long-Life finish | |
| Lead and Nickel Free Inner Water Ways | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| rapid installation system | |
| smooth body with plastic push open waste set 1 1/4" | |
| flexible connection hoses | |
| professional edition | |




| | |
|---|---------------|
| 24 265 001 | chrome |
| Euroeco | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE Long-Life 28 mm ceramic cartridge with temperature limiter | |
| GROHE Long-Life finish | |
| Lead and Nickel Free Inner Water Ways | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| rapid installation system | |
| plastic pop-up waste set 1 1/4" | |
| flexible connection hoses | |



| | |
|---|---------------|
| 24 266 001 | chrome |
| Euroeco | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE Long-Life 28 mm ceramic cartridge with temperature limiter | |
| GROHE Long-Life finish | |
| Lead and Nickel Free Inner Water Ways | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| rapid installation system | |
| smooth body | |
| flexible connection hoses | |
| professional edition | |




| | |
|---|---------------|
| 24 267 001 | chrome |
| Euroeco | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE Long-Life 28 mm ceramic cartridge with temperature limiter | |
| GROHE Long-Life finish | |
| Lead and Nickel Free Inner Water Ways | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| rapid installation system | |
| smooth body with plastic push open waste set 1 1/4" | |
| flexible connection hoses | |



| | |
|--|---------------|
| 24 268 001 | chrome |
| Euroeco | |
| Single-lever basin mixer 1/2" | |
| M-Size | |
| GROHE Long-Life ES 28 mm ceramic cartridge with energy saving function via cold start | |
| with temperature limiter | |
| GROHE Long-Life finish | |
| Lead and Nickel Free Inner Water Ways | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| rapid installation system | |
| smooth body with plastic push open waste set 1 1/4" | |
| flexible connection hoses | |
| professional edition | |

GROHE EUROECO



Ref. no.

Colour


24 269 001

chrome

Euroeco
Single-lever basin mixer 1/2"

M-Size

GROHE Long-Life ES 28 mm ceramic cartridge with energy saving function via cold start
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
smooth body with plastic push open waste set 1 1/4"
flexible connection hoses
professional edition




24 272 001

chrome

Euroeco
Single-lever basin mixer 1/2"

L-Size

GROHE Long-Life ES 28 mm ceramic cartridge with energy saving function via cold start
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
swivel tubular spout
plastic pop-up waste set 1 1/4"
flexible connection hoses




24 273 001

chrome

Euroeco
Single-lever basin mixer 1/2"

XL-Size

for free-standing basins
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
smooth body
flexible connection hoses



24 274 001


chrome

Euroeco
2-hole basin mixer

wall mounted
final installation for
23 571 000 / 32 635 000
GROHE Long-Life 35 mm ceramic cartridge
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
centre distance 110 mm
projection 177 mm
professional edition

23 571 000

Single-lever mixer 1/2", universal concealed body for 2-hole basin mixers








23 263 001

chrome


Euroeco
Single-lever bidet mixer 1/2"

GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
with ball joint
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses

GROHE EUROECO

| | Ref. no. | Colour |
|---|---|--------|
|  | 32 740 001 | chrome |
|  | Euroeco Single-lever shower mixer 1/2" wall mounted GROHE Long-Life 35 mm ceramic cartridge with temperature limiter GROHE Long-Life finish adjustable flow rate limiter shower bottom outlet with integrated non return-valve protected against backflow S-unions professional edition | |
|  | 24 278 001 | chrome |
|  | Euroeco Single-lever shower mixer 1/2" wall mounted GROHE Long-Life 35 mm ceramic cartridge with temperature limiter GROHE Long-Life finish adjustable flow rate limiter shower bottom outlet with integrated non return-valve protected against backflow S-unions professional edition | |
|  | 32 743 001 | chrome |
|  | Euroeco Single-lever bath mixer 1/2" wall mounted GROHE Long-Life 35 mm ceramic cartridge with temperature limiter GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower spout with mousseur shower bottom outlet with integrated non return-valve protected against backflow S-unions professional edition | |
|  | 13 471 001 | chrome |
|  | Euroeco Bath spout wall mounted GROHE Long-Life finish mousseur projection 171 mm male thread 1/2" professional edition | |
|  | 32 742 001 | chrome |
|  | Euroeco Single-lever shower mixer 1/2" concealed installation GROHE Long-Life 46 mm ceramic cartridge GROHE Long-Life finish consisting of: set for final installation (29 388 001) concealed body (33 964) adjustable flow rate limiter escutcheon- and shaft-sealing optional temperature limiter ref. no. 46 375 professional edition | |

GROHE EUROECO




Ref. no.

Colour


32 747 001 chrome
Euroeco
Single-lever bath mixer 1/2"
concealed installation
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
consisting of:
set for final installation (29 392 001)
concealed body(33 963)
adjustable flow rate limiter
automatic diverter: bath/shower
escutcheon- and shaft-sealing

GROHE BAUEDGE


Ref. no. Colour



20 421 001 chrome
BauEdge
Pillar tap 1/2" XS-Size
ceramic headpart
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min




23 328 001 chrome
BauEdge
Single-lever basin mixer 1/2"
S-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses




23 895 001 chrome
BauEdge
Single-lever basin mixer 1/2"
S-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
smooth body with plastic push open waste set 1 1/4"
flexible connection hoses

23 330 001 chrome
dito, smooth body




23 894 001 chrome
BauEdge
Single-lever basin mixer 1/2"
S-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 3.5 l/min
Lead and Nickel Free Inner Water Ways
GROHE LowFlow mousseur
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses




23 760 001 chrome
BauEdge
Single-lever basin mixer 1/2"
L-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
swivel tubular spout
plastic pop-up waste set 1 1/4"
flexible connection hoses

GROHE BAUEDGE




| Ref. no. | Colour |
|------------|--------|
| 23 911 001 | chrome |

BauEdge
Single-lever basin mixer 1/2"
L-Size
GROHE Long-Life 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
rapid installation system
swivel tubular spout
smooth body with plastic push open waste set 1 1/4"
flexible connection hoses




| Ref. no. | Colour |
|------------|--------|
| 23 761 001 | chrome |

BauEdge
Single-lever basin mixer 1/2"
XL-Size
for free-standing basins
GROHE Long-Life 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
rapid installation system
smooth body
flexible connection hoses




| Ref. no. | Colour |
|------------|--------|
| 20 474 001 | chrome |

BauEdge
2-hole basin mixer
wall mounted
set for final installation and concealed body
GROHE Long-Life 35 mm ceramic cartridge
GROHE Long-Life finish
centre distance 110 mm
projection 177 mm



| Ref. no. | Colour |
|------------|--------|
| 23 331 001 | chrome |

BauEdge
Single-lever bidet mixer 1/2"
GROHE Long-Life 28 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min
with ball joint
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses




| Ref. no. | Colour |
|------------|--------|
| 23 636 001 | chrome |


BauEdge
Single-lever shower mixer 1/2"
wall mounted
GROHE Long-Life 35 mm ceramic cartridge with temperature limiter
GROHE Long-Life finish
adjustable flow rate limiter
shower bottom outlet with integrated non return-valve
protected against backflow
S-unions

GROHE BAUEDGE


Ref. no. Colour




29 040 001 chrome
BauEdge
Single-lever shower mixer 1/2"
concealed installation
set for final installation
concealed body
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
escutcheon- and shaft-sealing




23 605 001 chrome
BauEdge
Single-lever bath mixer 1/2"
wall mounted
GROHE Long-Life 35 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
spout with mousseur
shower bottom outlet with integrated non return-valve
protected against backflow
S-unions



29 079 001 chrome
BauEdge
Single-lever bath mixer 1/2"
concealed installation
set for final installation
concealed body
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
escutcheon- and shaft-sealing




25 290 000 chrome
BauEdge
Concealed shower system with Tempesta 250
consisting of:
concealed single-lever mixer with 2-way diverter (24 162)
GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)
Tempesta 250 head shower set 9.5 l/min (26 668) including horizontal shower arm 380 mm
Tempesta 110 hand shower 2 sprays (27 597)
shower outlet elbow 1/2" with wall shower holder (28 679)
Rotaflex shower hose 1500 mm 1/2" x 1/2" (28 409)
optional flow regulator 9.5 l/min included for hand shower




25 291 000 chrome
BauEdge
Concealed shower system with Tempesta 250
consisting of:
concealed single-lever mixer with 2-way diverter (24 162)
GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)
Tempesta 250 head shower set 9.5 l/min (26 668) including horizontal shower arm 380 mm
Tempesta 110 hand shower 2 sprays (27 597)
wall shower holder (28 605)
bath spout with diverter (13 390)
Rotaflex shower hose 1500 mm 1/2" x 1/2" (28 409)
optional flow regulator 9.5 l/min included for hand shower

GROHE BAUEDGE




Ref. no. 29 039 001 Colour chrome




Ref. no. 29 353 001 Colour chrome

BauEdge
Single-lever bath mixer 1/2"
concealed installation
set for final installation
concealed body
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
escutcheon- and shaft-sealing
optional temperature limiter ref. no. 46 375



Ref. no. 13 255 001 Colour chrome


BauCosmopolitan
Bath spout
wall mounted
GROHE Long-Life finish
mousseur
projection 171 mm
male thread 1/2"



Ref. no. 13 425 001 Colour chrome

BauCosmopolitan
Bath spout with diverter
wall mounted
GROHE Long-Life finish
mousseur
non-return valve
automatic diverter: bath/shower
female thread 1/2"


GROHE BAULOOP



Ref. no.


Colour

23 335 001 chrome
BauLoop
Single-lever basin mixer 1/2"
S-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses




23 878 001 chrome
BauLoop
Single-lever basin mixer 1/2"
S-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
smooth body with plastic push open waste set 1 1/4"
flexible connection hoses


23 337 001 chrome
ditto, without plastic push open waste set 1 1/4"



23 877 001 chrome
BauLoop
Single-lever basin mixer 1/2"
S-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 3.5 l/min
GROHE LowFlow mousseur
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses




23 762 001 chrome
BauLoop
Single-lever basin mixer 1/2"
M-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses



23 886 001 chrome
BauLoop
Single-lever basin mixer 1/2"
M-Size
GROHE Long-Life 28 mm ceramic cartridge
with temperature limiter
GROHE Long-Life finish
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
smooth body with plastic push open waste set 1 1/4"
flexible connection hoses

23 917 001 chrome
ditto, without plastic push open waste set 1 1/4"

GROHE BAULOOP



Ref. no.

Colour

23 763 001

chrome


BauLoop

Single-lever basin mixer 1/2"

L-Size

GROHE Long-Life 28 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
swivel tubular spout
plastic pop-up waste set 1 1/4"
flexible connection hoses

23 891 001

chrome


BauLoop

Single-lever basin mixer 1/2"

L-Size

GROHE Long-Life 28 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
swivel tubular spout
smooth body with plastic push open waste set 1 1/4"
flexible connection hoses

23 764 001

chrome

BauLoop


Single-lever basin mixer 1/2"

XL-Size

for free-standing basins

GROHE Long-Life 28 mm ceramic cartridge with temperature limiter

GROHE Long-Life finish

Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
rapid installation system
smooth body
flexible connection hoses

20 289 001

chrome

BauLoop

2-hole basin mixer

wall mounted


set for final installation and concealed body

GROHE Long-Life 35 mm ceramic cartridge

GROHE Long-Life finish

centre distance 110 mm

projection 177 mm



23 338 001

chrome

BauLoop








Single-lever bidet mixer 1/2"

GROHE Long-Life 28 mm ceramic cartridge with temperature limiter


GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
with ball joint
rapid installation system
plastic pop-up waste set 1 1/4"
flexible connection hoses

GROHE BAULOOP

| | Ref. no. | Colour |
|---|---|--------|
|  | 23 634 001 | chrome |
|  | BauLoop Single-lever shower mixer 1/2" wall mounted GROHE Long-Life 35 mm ceramic cartridge with temperature limiter GROHE Long-Life finish adjustable flow rate limiter shower bottom outlet with integrated non return-valve protected against backflow S-unions | |
|  | 29 042 001 | chrome |
|  | BauLoop Single-lever shower mixer 1/2" concealed installation set for final installation concealed body GROHE Long-Life 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter escutcheon- and shaft-sealing | |
|  | 29 041 001 | chrome |
|  | BauLoop Single-lever bath mixer 1/2" concealed installation set for final installation concealed body GROHE Long-Life 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower escutcheon- and shaft-sealing | |
|  | 23 603 001 | chrome |
|  | BauLoop Single-lever bath mixer 1/2" wall mounted GROHE Long-Life 35 mm ceramic cartridge with temperature limiter GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower spout with mousseur shower bottom outlet with integrated non return-valve protected against backflow S-unions | |
|  | 29 081 001 | chrome |
|  | BauLoop Single-lever bath mixer 1/2" concealed installation set for final installation concealed body GROHE Long-Life 46 mm ceramic cartridge GROHE Long-Life finish adjustable flow rate limiter automatic diverter: bath/shower escutcheon- and shaft-sealing | |
|  | 13 255 001 | chrome |
|  | BauCosmopolitan Bath spout wall mounted GROHE Long-Life finish mousseur projection 171 mm male thread 1/2" | |

GROHE BAULOOP



Ref. no.

Colour

13 425 001


chrome

BauCosmopolitan
Bath spout with diverter
wall mounted
GROHE Long-Life finish
mousseur
non-return valve
automatic diverter: bath/shower
female thread 1/2"


GROHE BAUCLASSIC

Ref. no.


Colour




32 868 000 chrome
BauClassic
Single-lever basin mixer 1/2"
for free-standing basins
GROHE Long-Life 28 mm ceramic cartridge
GROHE Long-Life finish
mousseur
pop-up waste set 1 1/4"
flexible connection hoses
rapid installation system




32 864 000 chrome
BauClassic
Single-lever bidet mixer 1/2"
GROHE Long-Life 28 mm ceramic cartridge
GROHE Long-Life finish
ball-joint mousseur
pop-up waste set 1 1/4"
flexible connection hoses
rapid installation system



20 470 000 chrome
BauClassic
3-hole basin mixer 1/2"
ceramic headpart
GROHE Long-Life finish
spout with mousseur
pop-up waste set 1 1/4"
flexible connection hoses




32 867 000 chrome
BauClassic
Single-lever shower mixer 1/2"
wall mounted
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
shower bottom outlet 1/2"
S-unions




32 865 000 chrome
BauClassic
Single-lever bath mixer 1/2"
wall mounted
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
mousseur
S-unions

GROHE BAUCLASSIC




Ref. no. Colour

| | |
|---|--------|
| 29 048 000 | chrome |
| BauClassic | |
| Single-lever shower mixer | |
| concealed installation | |
| set for final installation | |
| concealed body (32 962 001) | |
| GROHE Long-Life 46 mm ceramic cartridge | |
| GROHE Long-Life finish | |
| adjustable flow rate limiter | |
| escutcheon- and shaft-sealing | |









| | |
|---|--------|
| 29 047 000 | chrome |
| BauClassic | |
| Single-lever bath mixer | |
| concealed installation | |
| set for final installation | |
| concealed body (32 963 001) | |
| GROHE Long-Life 46 mm ceramic cartridge | |
| GROHE Long-Life finish | |
| adjustable flow rate limiter | |
| automatic diverter: bath/shower | |
| escutcheon- and shaft-sealing | |





| | |
|--------------------|--------|
| 13 258 000 | chrome |
| BauClassic | |
| Bath spout | |
| wall mounted | |
| mousseur | |
| projection 140 mm | |
| female thread 1/2" | |

GROHE BAUCURVE


| | Ref. no. | Colour |
|---|---|--------|
|  | 32 848 000 | chrome |
|  | BauCurve Single-lever basin mixer 1/2" GROHE Long-Life 28 mm ceramic cartridge GROHE Long-Life finish mousseur smooth body flexible connection hoses rapid installation system | |
|  | 20 288 000 | chrome |
|  | BauCurve 2-hole basin mixer wall mounted set for final installation and concealed body GROHE Long-Life 35 mm ceramic cartridge GROHE Long-Life finish mousseur centre distance 110 mm projection 166 mm | |
|  | 23 631 000 | chrome |
|  | BauCurve Single-lever shower mixer 1/2" wall mounted GROHE Long-Life 35 mm ceramic cartridge GROHE Long-Life finish shower bottom outlet 1/2" S-unions | |
|  | 13 390 000 | chrome |
|  | BauContemporary Bath spout with diverter wall mounted GROHE Long-Life finish mousseur non-return valve automatic diverter: bath/shower projection 170 mm male thread 1/2" | |
|  | 13 254 000 | chrome |
|  | BauContemporary Bath spout wall mounted mousseur automatic diverter: bath/shower projection 140 mm female thread 1/2" | |
|  | 13 252 000 | chrome |
|  | BauContemporary Bath spout wall mounted mousseur projection 140 mm female thread 1/2" | |

GROHE BAUFLOW


| | Ref. no. | Colour |
|---|--|--------|
|  | 23 751 000 BauFlow Single-lever basin mixer 1/2" S-Size GROHE Long-Life 28 mm ceramic cartridge GROHE Long-Life finish GROHE Water Saving mousseur 5.7 l/min rapid installation system plastic pop-up waste set 1 1/4" flexible connection hoses | chrome |
|  | 23 752 000 BauFlow Single-lever basin mixer 1/2" S-Size GROHE Long-Life 28 mm ceramic cartridge GROHE Long-Life finish GROHE Water Saving mousseur 5.7 l/min rapid installation system smooth body flexible connection hoses | chrome |
|  | 23 753 000 BauFlow Single-lever basin mixer 1/2" L-Size GROHE Long-Life 28 mm ceramic cartridge GROHE Long-Life finish GROHE Water Saving mousseur 5.7 l/min rapid installation system swivel tubular spout plastic pop-up waste set 1 1/4" flexible connection hoses | chrome |
|  | 20 287 000 BauFlow 2-hole basin mixer wall mounted set for final installation concealed body GROHE Long-Life 35 mm ceramic cartridge GROHE Long-Life finish mousseur centre distance 110 mm projection 166 mm | chrome |
|  | 23 754 000 BauFlow Single-lever bidet mixer 1/2" GROHE Long-Life 28 mm ceramic cartridge GROHE Long-Life finish GROHE Water Saving mousseur 5.7 l/min rapid installation system with ball joint pop-up waste set 1 1/4" flexible connection hoses | chrome |
|  | 23 632 000 BauFlow Single-lever shower mixer 1/2" wall mounted GROHE Long-Life 35 mm ceramic cartridge GROHE Long-Life finish shower bottom outlet 1/2" S-unions | chrome |

GROHE BAUFLOW


Ref. no. Colour




23 601 000 chrome
BauFlow
Single-lever bath mixer 1/2"
wall mounted
GROHE Long-Life 35 mm ceramic cartridge
GROHE Long-Life finish
automatic diverter: bath/shower
mousseur
S-unions




29 045 000 chrome
BauFlow
Single-lever bath mixer
concealed installation
set for final installation
concealed body (32 963 001)
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
automatic diverter: bath/shower
escutcheon- and shaft-sealing




29 046 000 chrome
BauFlow
Single-lever shower mixer
concealed installation
set for final installation
concealed body (32 962 001)
GROHE Long-Life 46 mm ceramic cartridge
GROHE Long-Life finish
adjustable flow rate limiter
escutcheon- and shaft-sealing



13 390 000 chrome
BauContemporary
Bath spout with diverter
wall mounted
GROHE Long-Life finish
mousseur
non-return valve
automatic diverter: bath/shower
projection 170 mm
male thread 1/2"







13 252 000 chrome
BauContemporary
Bath spout
wall mounted
mousseur
projection 140 mm
female thread 1/2"










13 254 000 chrome
BauContemporary
Bath spout
wall mounted
mousseur
automatic diverter: bath/shower
projection 140 mm
female thread 1/2"





GROHE COSTA L

| | Ref. no. | Colour |
|---|--|--------|
|  | 20 404 001 | chrome |
|  | Costa L Pillar tap 1/2" metal handle heat insulated screwable marking: blue GROHE Long-Life headpart cast spout with mousseur GROHE Long-Life finish | |
|  | 20 393 001 | chrome |
|  | Costa L Pillar tap 1/2" metal handle heat insulated screwable marking: blue GROHE Long-Life headpart swivel tubular spout with mousseur GROHE Long-Life finish | |
|  | 21 375 001 | chrome |
|  | Costa L Single-hole basin mixer 1/2" metal handles heat insulated screwable GROHE Long-Life headpart swivel tubular spout with mousseur pop-up waste set 1 1/4" flexible connection hoses GROHE Long-Life finish | |
|  | 26 330 001 | chrome |
|  | Costa L Shower mixer 1/2" wall mounted metal handles heat insulated screwable GROHE Long-Life headpart shower connection 1/2" S-unions GROHE Long-Life finish | |
|  | 25 450 001 | chrome |
|  | Costa L Bath mixer 1/2" wall mounted metal handles heat insulated screwable GROHE Long-Life headpart automatic diverter: bath/shower mousseur S-unions GROHE Long-Life finish | |






GROHE COSTA L

| | Ref. no. | Colour |
|---|---|--------|
|  | 25 452 001  Costa L Bath mixer 1/2" wall mounted metal handles heat insulated screwable GROHE Long-Life headpart shower top outlet 3/4" automatic diverter: bath/shower mousseur S-unions GROHE Long-Life finish | chrome |
|  | 26 010 001  Costa L Shower bibtap, 1/2" wall mounted metal handle heat insulated marking: blue GROHE Long-Life headpart shower outlet 3/4" GROHE Long-Life finish | chrome |
|  | 19 854 001  Costa L Concealed valve exposed part for concealed valves 29 800 1/2", 29 802 3/4", 29 805 1" installation depth infinitely adjustable 10 - 35 mm metal handle heat insulated marking: blue escutcheon GROHE Long-Life finish | chrome |
|  | 19 855 001  ditto, marking red | chrome |
|  | 19 808 001  Costa L Concealed valve exposed part for concealed valves 29 800 1/2", 29 802 3/4", 29 805 1" installation depth infinitely adjustable 20-80 mm escutcheon with wall sealing screwable metal handle heat insulated marking: blue GROHE Long-Life finish | chrome |
|  | 19 809 001  ditto, marking red | chrome |
|  | 19 806 001  Costa L Concealed valve exposed part for concealed valves 29 800 1/2", 29 802 3/4", 29 805 1" installation depth infinitely adjustable 20 - 200 mm escutcheon with wall sealing screwable metal handle heat insulated marking: blue GROHE Long-Life finish | chrome |
|  | 19 807 001  ditto, marking red | chrome |






GROHE UNIVERSAL

| | Ref. no. | Colour |
|---|---|--------|
|  | 20 201 000 | chrome |
|  | <p>Universal pillar tap 1/2" C-spout Flow-Stop mousseur ceramic headpart union nut 1/2" with 10.5 mm drilling GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min projection 113 mm</p> | |
|  | 20 202 000 | chrome |
|  | <p>Universal pillar tap 1/2" 7°-spout Flow-Stop mousseur ceramic headpart union nut 1/2" with 10.5 mm drilling GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min projection 114 mm</p> | |
|  | 20 205 000 | chrome |
|  | <p>Universal wall-mounted tap 1/2" Flow-Stop mousseur ceramic headpart connection thread 1/2" GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min projection 106 mm</p> | |
|  | 20 203 000 | chrome |
|  | <p>Universal wall-mounted tap 1/2" Flow-Stop mousseur ceramic headpart connection thread 1/2" GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow maximum flow rate (at 3 bar): 5 l/min projection 185 mm</p> | |

GROHE TALENTO / TALENTOFILL

| | Ref. no. | Colour |
|---|---|---|
|  | 19 952 000 19 952 DCO 19 952 GLO 19 952 GN0 19 952 DAO 19 952 DL0 19 952 A00 19 952 AL0 19 952 2430 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite matte black |
|  | Talentofill Inlet, pop-up and waste-system set for final installation escutcheon waste plug fixing set in combination with Talentofill 28 990 / 28 991 GROHE Long-Life finish | |
|  | 28 990 000 28 990 DCO 28 990 GLO 28 990 GN0 28 990 DAO 28 990 DL0 28 990 A00 28 990 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Talentofill Inlet, pop-up and waste-system for normal bath tubs without finishing trim set with bottle trap and 45°-outlet-bend plug included | |
|  | 28 991 000 | chrome |
|  | Talentofill Inlet, pop-up and waste-system for special bath tubs without finishing trim set with bottle trap and 45°-outlet-bend without anti-vacuum device plug included | |
|  | 19 025 000 | chrome |
|  | Talento Waste and overflow set for bath tubes set for final installation escutcheon waste plug fixing set in combination with Talentofill 28 939/28 943 GROHE Long-Life finish | |
|  | 28 939 000 | chrome |
|  | Talento Talento pop-up bath waste and overflow set for normal bath and deep shower trays with bowden cable without finishing trim set bottle trap 45° waste elbow | |


GROHE SELECTION

| | Ref. no. | Colour |
|---|---|--|
|  | 41 027 000 41 027 DCO 41 027 GLO 41 027 GN0 41 027 DAO 41 027 DL0 41 027 A00 41 027 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Selection Holder material: metal for Selection soap dispenser (41 028 xx0/41 218 KF0) or Selection glass (41 029 000) concealed fastening GROHE Long-Life finish | |
| | 41 217 KF0 ditto, Professional exclusive | phantom black |
|  | 41 028 000 41 028 DCO 41 028 GLO 41 028 GN0 41 028 DAO 41 028 DL0 41 028 A00 41 028 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Selection Soap Dispenser material: glass / metal fits in the following holder: 41 027 xx0/41 217 KF0 GROHE Long-Life finish | |
| | 41 218 KF0 ditto, Professional exclusive | phantom black |
|  | 41 029 000 | chrome |
|  | Selection White glass material: glass fits in the following holder: 41 027 xx0/41 217 KF0 | |
|  | 41 035 000 41 035 DCO 41 035 GLO 41 035 GN0 41 035 DAO 41 035 DL0 41 035 A00 41 035 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Selection Towel ring/holder material: metal holder for soap dish (41 036) and shower tray (41 037) length 200 mm concealed fastening GROHE Long-Life finish | |
|  | 41 036 000 | glass clear |
|  | Selection Soap dish without holder material: glass for use with towel ring (41 035) | |

GROHE SELECTION


Ref. no.

Colour



41 037 000


Selection
Shower tray without holder
material: plastic
for use with towel ring (41 035)



41 038 000
41 038 DC0
41 038 GLO
41 038 GN0
41 038 DAO
41 038 DL0
41 038 A00
41 038 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
hard graphite
brushed hard graphite

Selection
Corner shower tray with holder
material: metal/plastic
concealed fastening
GROHE Long-Life finish




41 039 000
41 039 DC0
41 039 GLO
41 039 GN0
41 039 DAO
41 039 DL0
41 039 A00
41 039 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
hard graphite
brushed hard graphite

Selection
Single robe hook
material: metal
concealed fastening
GROHE Long-Life finish

41 216 KF0
ditto, Professional exclusive


phantom black



41 049 000
41 049 DC0
41 049 GLO
41 049 GN0
41 049 DAO
41 049 DL0
41 049 A00
41 049 AL0

chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
hard graphite
brushed hard graphite

Selection
Double robe hook
material: metal
concealed fastening
GROHE Long-Life finish








41 056 000
41 056 DC0
41 056 GLO
41 056 GN0
41 056 DAO
41 056 DL0
41 056 A00
41 056 AL0





chrome
supersteel
cool sunrise
brushed cool sunrise
warm sunset
brushed warm sunset
hard graphite
brushed hard graphite

Selection
Towel holder
material: metal
length 600 mm
concealed fastening
for use with glass shelf (41 057)
GROHE Long-Life finish


GROHE SELECTION

| | Ref. no. | Colour |
|---|---|--|
|  | 41 057 000 Selection Glass shelf material: glass for use with towel rail (41 056) | chrome |
|  | | |
|  | 41 058 000 41 058 DCO 41 058 GLO 41 058 GN0 41 058 DAO 41 058 DL0 41 058 A00 41 058 AL0 Selection Towel holder material: metal length 800 mm concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | 41 059 000 41 059 DCO 41 059 GLO 41 059 GN0 41 059 DAO 41 059 DL0 41 059 A00 41 059 AL0 Selection Towel holder, non pivotable material: metal depth 411 mm (functional depth 360 mm) two arms concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | 41 063 000 41 063 DCO 41 063 GLO 41 063 GN0 41 063 DAO 41 063 DL0 41 063 A00 41 063 AL0 Selection Towel holder, pivotable material: metal depth 441 mm (functional depth 400 mm) two arms concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | 41 219 KF0 ditto, Professional exclusive | phantom black |
| | 41 064 000 41 064 DCO 41 064 GLO 41 064 GN0 41 064 DAO 41 064 DL0 41 064 A00 41 064 AL0 Selection Grip bar material: metal length 336 mm (functional length 300 mm) concealed fastening GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |

GROHE SELECTION

| | Ref. no. | Colour |
|---|---|--|
|  | | |
|  | 41 066 000 41 066 DC0 41 066 GLO 41 066 GN0 41 066 DAO 41 066 DL0 41 066 A00 41 066 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Selection Multi-towel rack material: metal length 596 mm concealed fastening GROHE Long-Life finish | |
|  | | |
|  | 41 067 000 41 067 DC0 41 067 GLO 41 067 GN0 41 067 DAO 41 067 DL0 41 067 A00 41 067 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Selection Spare toilet paper holder (2 rolls) material: metal wall mounted concealed fastening GROHE Long-Life finish | |
|  | | |
|  | 41 068 000 41 068 DC0 41 068 GLO 41 068 GN0 41 068 DAO 41 068 DL0 41 068 A00 41 068 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Selection Toilet paper holder without cover material: metal wall mounted concealed fastening GROHE Long-Life finish | |
|  | | |
|  | 41 220 KF0 ditto, Professional exclusive | phantom black |
| | | |
| | 41 069 000 41 069 DC0 41 069 GLO 41 069 GN0 41 069 DAO 41 069 DL0 41 069 A00 41 069 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Selection Toilet paper holder with cover material: metal wall mounted concealed fastening GROHE Long-Life finish | |

GROHE SELECTION



Ref. no.

Colour


| | |
|------------|-----------------------|
| 41 076 000 | chrome |
| 41 076 DC0 | supersteel |
| 41 076 GLO | cool sunrise |
| 41 076 GN0 | brushed cool sunrise |
| 41 076 DAO | warm sunset |
| 41 076 DLO | brushed warm sunset |
| 41 076 A00 | hard graphite |
| 41 076 AL0 | brushed hard graphite |

Selection**Toilet brush set**

material: glass / metal
wall mounted
concealed fastening
GROHE Long-Life finish

| | |
|-------------------------------|---------------|
| 41 215 KF0 | phantom black |
| ditto, Professional exclusive | |

| | |
|------------------|--------------|
| 40 791 001 | white |
| 40 791 KS1 | velvet black |
| Spare brush head | |



| | |
|------------|-----------------------|
| 41 077 000 | chrome |
| 41 077 DC0 | supersteel |
| 41 077 GLO | cool sunrise |
| 41 077 GN0 | brushed cool sunrise |
| 41 077 DAO | warm sunset |
| 41 077 DLO | brushed warm sunset |
| 41 077 A00 | hard graphite |
| 41 077 AL0 | brushed hard graphite |

Selection**Shaving mirror**




material: glass / metal
without lights
magnification: x 7
concealed fastening
GROHE Long-Life finish

| | |
|-------------------------------|---------------|
| 102279 KF0 | phantom black |
| ditto, Professional exclusive | |

GROHE SELECTION CUBE


| | Ref. no. | Colour |
|---|--|------------|
|  | 40 865 000 Selection Cube Holder material: metal Selection Cube soap dish (40 806 000) or Selection Cube soap dispenser (40 805 000) Selection Cube glass (40 783 000) concealed fastening GROHE Long-Life finish | chrome |
|  | 40 805 000 Selection Cube Soap dispenser material: glass / metal filling quantity 300 ml fits in the following holder: Selection Cube (40 865 000/102 275 KF00) GROHE Long-Life finish | chrome |
|  | 40 806 000 Selection Cube Soap dish material: glass fits in the following holder: Selection Cube (40 865 000/102 275 KF00) | glass matt |
|  | 40 783 000 Selection Cube Glass material: glass fits in the following holder: Selection Cube (40 865 000/102 275 KF00) | chrome |
|  | 40 766 000 Selection Cube Towel ring material: metal concealed fastening GROHE Long-Life finish | chrome |
|  | 40 768 000 Selection Cube Double towel bar material: metal 2 arms, pivotable 400 mm concealed fastening GROHE Long-Life finish | chrome |

GROHE SELECTION CUBE


| | Ref. no. | Colour |
|---|---|--------|
|  | 40 767 000 | chrome |
|  | Selection Cube Towel holder material: metal concealed fastening GROHE Long-Life finish | |
|  | 40 804 000 | chrome |
|  | Selection Cube Multi bath towel rack material: metal 600 mm (functional length 575 mm) concealed fastening GROHE Long-Life finish | |
|  | 40 782 000 | chrome |
|  | Selection Cube Bathrobe hook material: metal concealed fastening GROHE Long-Life finish | |
|  | 40 807 000 | chrome |
|  | Selection Cube Grip bar/towel bar material: metal 600 mm (functional length 548 mm) concealed fastening GROHE Long-Life finish | |
|  | 40 781 000 | chrome |
|  | Selection Cube Toilet paper holder material: metal concealed fastening with cover GROHE Long-Life finish | |
|  | 40 784 000 | chrome |
|  | Selection Cube Spare toilet paper holder material: metal wall mounted concealed fastening GROHE Long-Life finish | |

GROHE SELECTION CUBE


Ref. no. Colour



| | |
|---|------------|
| 40 857 000 | chrome |
| Selection Cube Toilet brush set material: glass / metal wall mounted concealed fastening GROHE Long-Life finish | |
| 40 870 000 | |
| Spare brush head | |
| 40 868 000 | chrome |
| Spare brush | |
| 40 867 000 | glass matt |
| Spare glass | |




| | |
|---|--------|
| 40 809 000 | chrome |
| Selection Cube Soap wire basket material: metal for corner installation GROHE Long-Life finish | |
| | |



| | |
|---|--------|
| 40 808 000 | chrome |
| Selection Cube Shaving mirror material: glass / metal wall mounted concealed fastening magnification: x 3 GROHE Long-Life finish | |
| | |

GROHE ESSENTIALS




| Ref. no. | Colour |
|------------|-----------------------|
| 40 369 001 | chrome |
| 40 369 DC1 | supersteel |
| 40 369 GL1 | cool sunrise |
| 40 369 GN1 | brushed cool sunrise |
| 40 369 DA1 | warm sunset |
| 40 369 DL1 | brushed warm sunset |
| 40 369 A01 | hard graphite |
| 40 369 AL1 | brushed hard graphite |

Essentials Holder

material: metal
for crystal glass (40 372 001)
soap dish (40 368 001) or soap dispenser (40 394 001)
concealed fastening
GROHE Long-Life finish
holding force: max. 5 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only

102466 243 0 matte black
ditto, Professional exclusive




| | |
|------------|-----------------------|
| 40 394 001 | chrome |
| 40 394 DC1 | supersteel |
| 40 394 GL1 | cool sunrise |
| 40 394 GN1 | brushed cool sunrise |
| 40 394 DA1 | warm sunset |
| 40 394 DL1 | brushed warm sunset |
| 40 394 A01 | hard graphite |
| 40 394 AL1 | brushed hard graphite |

Essentials Soap dispenser

material: glass / metal
filling quantity 160 ml
fits in the following holders:
Essentials (40 369 xx1/102 466 2430)
Essentials Cube (40 508)
Bau Cosmopolitan (40 585)
GROHE Long-Life finish


102470 243 0 matte black
ditto, Professional exclusive



40 368 001 glass clear

Essentials
Soap dish

material: glass
fits in the following holders:
Essentials (40 369 xx1/102 466 2430)
Essentials Cube (40 508)
Bau Cosmopolitan (40 585)
Essentials Authentic (40 652)




40 372 001 chrome

Essentials
Crystal glass

material: glass
fits in the following holders:
Essentials (40 369 xx1/102 466 2430)
Essentials Cube (40 508)

GROHE ESSENTIALS

Ref. no. Colour




40 448 001 chrome
40 448 DC1 supersteel

Essentials

Soap dispenser with holder

material: glass / metal
filling quantity 160 ml
holder (40 369 001)
soap dispenser (40 394 001)
concealed fastening
GROHE Long-Life finish
holding force: max. 5 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only

102257 243 0 matte black
ditto, Professional exclusive




40 444 001 chrome
40 444 DC1 supersteel

Essentials

Soap dish with holder

material: glass / metal
holder (40 369 001)
soap dish (40 368 001)
concealed fastening
GROHE Long-Life finish
holding force: max. 5 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only




40 447 001 chrome
40 447 DC1 supersteel

Essentials

Crystal glass with holder

material: glass / metal
holder (40 369 001)
Glass cup (40 372 001)
concealed fastening
GROHE Long-Life finish
holding force: max. 5 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only

102256 243 0 matte black
ditto, Professional exclusive



40 365 001 chrome
40 365 DC1 supersteel
40 365 GL1 cool sunrise
40 365 GN1 brushed cool sunrise
40 365 DA1 warm sunset
40 365 DL1 brushed warm sunset
40 365 A01 hard graphite
40 365 AL1 brushed hard graphite

Essentials

Towel ring

material: metal
concealed fastening
GROHE Long-Life finish
holding force: max. 5 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only


102461 243 0 matte black
ditto, Professional exclusive

GROHE ESSENTIALS

| | Ref. no. | Colour |
|---|---|--|
|  | 40 371 001 40 371 DC1 40 371 GL1 40 371 GN1 40 371 DA1 40 371 DL1 40 371 A01 40 371 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Essentials Towel holder material: metal 2 arms, pivotable 439 mm concealed fastening GROHE Long-Life finish | |
| | 102467 243 0 ditto, Professional exclusive | matte black |
|  | 40 688 001 40 688 DC1 40 688 GL1 40 688 GN1 40 688 DA1 40 688 DL1 40 688 A01 40 688 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Essentials Towel holder material: metal 504 mm (functional length 450 mm) concealed fastening GROHE Long-Life finish holding force: max. 10 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |
|  | 40 366 001 40 366 DC1 40 366 GL1 40 366 GN1 40 366 DA1 40 366 DL1 40 366 A01 40 366 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Essentials Towel holder material: metal 654 mm (functional length 600 mm) concealed fastening GROHE Long-Life finish holding force: max. 10 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |
| | 102251 243 0 ditto, Professional exclusive | matte black |
|  | 40 386 001 40 386 DC1 40 386 GL1 40 386 GN1 40 386 DA1 40 386 DL1 40 386 A01 40 386 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| | Essentials Towel holder material: metal 854 mm (functional length 800 mm) concealed fastening GROHE Long-Life finish holding force: max. 10 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |

GROHE ESSENTIALS


Ref. no. Colour



| | |
|------------|-----------------------|
| 40 802 001 | chrome |
| 40 802 DC1 | supersteel |
| 40 802 GL1 | cool sunrise |
| 40 802 GN1 | brushed cool sunrise |
| 40 802 DA1 | warm sunset |
| 40 802 DL1 | brushed warm sunset |
| 40 802 A01 | hard graphite |
| 40 802 AL1 | brushed hard graphite |


Essentials
Double towel rail
material: metal
654 mm (functional length 600 mm)
concealed fastening
GROHE Long-Life finish

102473 243 0 matte black
ditto, Professional exclusive



| | |
|------------|-----------------------|
| 40 800 001 | chrome |
| 40 800 DC1 | supersteel |
| 40 800 GL1 | cool sunrise |
| 40 800 GN1 | brushed cool sunrise |
| 40 800 DA1 | warm sunset |
| 40 800 DL1 | brushed warm sunset |
| 40 800 A01 | hard graphite |
| 40 800 AL1 | brushed hard graphite |

Essentials
Multi bath towel rack
material: metal
604 mm (functional length 550 mm)
concealed fastening
GROHE Long-Life finish



| | |
|------------|-----------------------|
| 40 364 001 | chrome |
| 40 364 DC1 | supersteel |
| 40 364 GL1 | cool sunrise |
| 40 364 GN1 | brushed cool sunrise |
| 40 364 DA1 | warm sunset |
| 40 364 DL1 | brushed warm sunset |
| 40 364 A01 | hard graphite |
| 40 364 AL1 | brushed hard graphite |

Essentials
Bathrobe hook
material: metal
concealed fastening
GROHE Long-Life finish
holding force: max. 5 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only

102460 243 0 matte black
ditto, Professional exclusive








| | |
|------------|-----------------------|
| 40 421 001 | chrome |
| 40 421 DC1 | supersteel |
| 40 421 GL1 | cool sunrise |
| 40 421 GN1 | brushed cool sunrise |
| 40 421 DA1 | warm sunset |
| 40 421 DL1 | brushed warm sunset |
| 40 421 A01 | hard graphite |
| 40 421 AL1 | brushed hard graphite |

Essentials
Grip bar
material: metal
349 mm (functional length 295 mm)
concealed fastening
GROHE Long-Life finish

102471 243 0 matte black
ditto, Professional exclusive


GROHE ESSENTIALS

| | Ref. no. | Colour |
|---|---|--|
|  | 40 793 001 40 793 DC1 | chrome supersteel |
|  | Essentials Grip bar material: metal 507 mm (functional length 450 mm) concealed fastening GROHE Long-Life finish | |
|  | 40 794 001 40 794 DC1 | chrome supersteel |
|  | Essentials Grip bar material: metal 657 mm (functional length 600 mm) concealed fastening GROHE Long-Life finish | |
|  | 40 797 001 | chrome |
|  | Essentials Grip bar material: metal 737 x 997 mm (functional length 680 x 940 mm) concealed fastening GROHE Long-Life finish | |
|  | 40 799 001 | chrome |
|  | Essentials Glass shelf material: glass / metal 530 mm (functional length 380 mm) concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |
|  | 40 689 001 40 689 DC1 40 689 GL1 40 689 GN1 40 689 DA1 40 689 DL1 40 689 A01 40 689 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Essentials Toilet paper holder material: metal without cover concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |
| | 102472 243 0 | matte black ditto, Professional exclusive |

GROHE ESSENTIALS

| Ref. no. | Colour |
|--|--|
| 40 367 001 40 367 DC1 40 367 GL1 40 367 GN1 40 367 DA1 40 367 DL1 40 367 A01 40 367 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| Essentials Toilet paper holder material: metal with cover concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |
| 102465 243 0 ditto, Professional exclusive | matte black |
| 40 385 001 40 385 DC1 40 385 GL1 40 385 GN1 40 385 DA1 40 385 DL1 40 385 A01 40 385 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| Essentials Spare toilet paper holder material: metal wall mounted concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |
| 102469 243 0 ditto, Professional exclusive | matte black |
| 40 374 001 40 374 DC1 40 374 GL1 40 374 GN1 40 374 DA1 40 374 DL1 40 374 A01 40 374 AL1 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| Essentials Toilet brush set material: glass / metal wall mounted concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | |
| 102468 243 0 ditto, Professional exclusive | matte black |
| 40 392 000 Spare brush | chrome |
| 40 393 000 Spare glass | daVinci satin white |

GROHE ESSENTIALS

| | Ref. no. | Colour |
|---|--|--|
|  | 40 696 GLO 40 696 DC0 40 696 DAO 40 696 AL0 | cool sunrise supersteel warm sunset brushed hard graphite |
|  | 40 407 001 40 407 DC1 | chrome supersteel |
|  | 40 775 001 40 775 DC1 | chrome supersteel |
|  | 40 776 001 | chrome |
|  | 40 344 001 | chrome |






GROHE ESSENTIALS CUBE

| | Ref. no. | Colour |
|---|--|---|
|  | 40 508 001 40 508 DC1 40 508 AL1 Essentials Cube Holder material: metal for crystal glass (40 372 001) soap dish (40 368 001) or soap dispenser (40 394 001) concealed fastening GROHE Long-Life finish | chrome supersteel brushed hard graphite |
|  | 40 394 001 40 394 DC1 40 394 AL1 Essentials Soap dispenser material: glass / metal filling quantity 160 ml fits in the following holders: Essentials (40 369 xx1/102 466 2430) Essentials Cube (40 508) Bau Cosmopolitan (40 585) GROHE Long-Life finish | chrome supersteel brushed hard graphite |
|  | 40 368 001 Essentials Soap dish material: glass fits in the following holders: Essentials (40 369 xx1/102 466 2430) Essentials Cube (40 508) Bau Cosmopolitan (40 585) Essentials Authentic (40 652) | glass clear |
|  | 40 372 001 Essentials Crystal glass material: glass fits in the following holders: Essentials (40 369 xx1/102 466 2430) Essentials Cube (40 508) | chrome |
|  | 40 756 001 Essentials Cube Soap dispenser with holder material: glass / metal filling quantity 160 ml holder (40 508 001) soap dispenser (40 394 001) concealed fastening GROHE Long-Life finish | chrome |
|  | 40 755 001 Essentials Cube Crystal glass with holder material: glass / metal holder (40 508 001) crystal glass (40 372 001) concealed fastening GROHE Long-Life finish | chrome |


GROHE ESSENTIALS CUBE

| | Ref. no. | Colour |
|---|---|---|
|  | 40 754 001 Essentials Cube Soap dish with holder material: glass / metal holder (40 508 001) soap dish (40 368 001) concealed fastening GROHE Long-Life finish | chrome |
|  | 40 510 001 40 510 DC1 40 510 AL1 Essentials Cube Towel ring material: metal concealed fastening GROHE Long-Life finish | chrome supersteel brushed hard graphite |
|  | 40 624 001 40 624 DC1 40 624 AL1 Essentials Cube Towel holder material: metal 2 arms, pivotable 439 mm concealed fastening GROHE Long-Life finish | chrome supersteel brushed hard graphite |
|  | 40 509 001 40 509 DC1 40 509 AL1 Essentials Cube Towel holder material: metal 600 mm (functional length 558 mm) concealed fastening GROHE Long-Life finish | chrome supersteel brushed hard graphite |
|  | 40 512 001 40 512 DC1 40 512 AL1 Essentials Cube Multi-towel rack material: metal 600 mm (functional length 558 mm) concealed fastening GROHE Long-Life finish | chrome supersteel brushed hard graphite |
|  | 40 511 001 40 511 DC1 40 511 AL1 Essentials Cube Bathrobe hook material: metal concealed fastening GROHE Long-Life finish | chrome supersteel brushed hard graphite |

GROHE ESSENTIALS CUBE
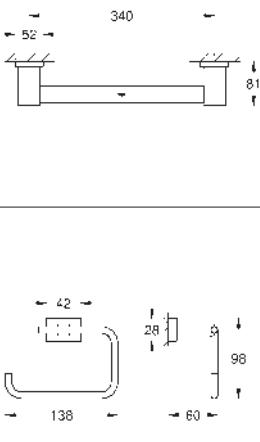
| | Ref. no. | Colour |
|---|--|---|
|  | 40 514 001 40 514 DC1 40 514 AL1 | chrome supersteel brushed hard graphite |
|  | Essentials Cube Grip bar material: metal 392 mm (functional length 340 mm) concealed fastening GROHE Long-Life finish | |
|  | 40 507 001 40 507 DC1 40 507 AL1 | chrome supersteel brushed hard graphite |
|  | Essentials Cube Spare toilet paper holder material: metal wall mounted concealed fastening GROHE Long-Life finish | |
|  | 40 513 001 40 513 DC1 40 513 AL1 | chrome supersteel brushed hard graphite |
|  | Essentials Cube Toilet brush set material: glass / metal wall mounted concealed fastening GROHE Long-Life finish | |
|  | 40 791 001 40 791 KS1 | white velvet black |
|  | Spare brush | chrome |
|  | 40 393 000 | daVinci satin white |
|  | 40 778 001 | chrome |
|  | Essentials Cube Master bathroom accessories set 4-in-1 robe hook (40 511 001) towel ring (40 510 001) toilet paper holder (40 507 001) towel rail, 558 mm (40 509 001) concealed fastening GROHE Long-Life finish | |

GROHE ESSENTIALS CUBE



Ref. no.

Colour

40 758 001

chrome

Essentials Cube**Master bathroom accessories set 5-in-1**

soap dish with holder (40 754 001)

towel rail, 558 mm (40 509 001)

toilet paper holder (40 507 001)

robe hook (40 511 001)


towel ring (40 510 001)

concealed fastening


GROHE Long-Life finish

GROHE BAUCOSMOPOLITAN


Ref. no. Colour




40 585 001 chrome
BauCosmopolitan Holder
material: metal
for crystal glass (40 372 001), soap dish (40 368 001),
or soap dispenser (40 394 001)
concealed fastening
GROHE Long-Life finish




40 394 001 chrome
Essentials Soap dispenser
material: glass / metal
filling quantity 160 ml
fits in the following holders:
Essentials (40 369 xx1/102 466 2430)
Essentials Cube (40 508)
Bau Cosmopolitan (40 585)
GROHE Long-Life finish




40 368 001 glass clear
Essentials Soap dish
material: glass
fits in the following holders:
Essentials (40 369 xx1/102 466 2430)
Essentials Cube (40 508)
Bau Cosmopolitan (40 585)
Essentials Authentic (40 652)



40 372 001 chrome
Essentials Crystal glass
material: glass
fits in the following holders:
Essentials (40 369 xx1/102 466 2430)
Essentials Cube (40 508)



40 460 001 chrome
BauCosmopolitan Towel ring
material: metal
concealed fastening
GROHE Long-Life finish
holding force: max. 5 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only



40 459 001 chrome
BauCosmopolitan Towel holder
material: metal
522 mm (functional length 430 mm)
concealed fastening
GROHE Long-Life finish
holding force: max. 10 kg
the specified holding capacity is valid for static (slowly applied) load and intended use only


GROHE BAUCOSMOPOLITAN

| | Ref. no. | Colour |
|---|--|-----------------------|
|  | 40 462 001 BauCosmopolitan Multi-towel rack material: metal 564 mm (functional length 510 mm) concealed fastening GROHE Long-Life finish | chrome |
|  | 40 461 001 BauCosmopolitan Bathrobe hook material: metal concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | chrome |
|  | 40 457 001 BauCosmopolitan Paper holder material: metal without cover concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | chrome |
|  | 40 463 001 BauCosmopolitan Toilet brush set material: glass / metal wall mounted concealed fastening GROHE Long-Life finish holding force: max. 5 kg the specified holding capacity is valid for static (slowly applied) load and intended use only | chrome |
| | 40 791 001 40 791 KS1 Spare brush head | white velvet black |
| | 40 392 000 Spare brush | chrome |
| | 40 393 000 Spare glass | daVinci satin white |
|  | 40 663 001 BauCosmopolitan Soap wire basket material: metal for corner installation | chrome |

GROHE BAUCOSMOPOLITAN

Ref. no.

Colour



40 664 001

chrome

BauCosmopolitan

Soap wire basket

material: metal

for corner installation

GROHE ESSENTIALS AUTHENTIC

| | Ref. no. | Colour |
|---|--|-------------|
|  | 40 394 001 Essentials Soap dispenser material: glass / metal filling quantity 160 ml fits in the following holders: Essentials (40 369 xx1/102 466 2430) Essentials Cube (40 508) Bau Cosmopolitan (40 585) GROHE Long-Life finish | chrome |
|  | 40 368 001 Essentials Soap dish material: glass fits in the following holders: Essentials (40 369 xx1/102 466 2430) Essentials Cube (40 508) Bau Cosmopolitan (40 585) Essentials Authentic (40 652) | glass clear |
|  | 40 372 001 Essentials Crystal glass material: glass fits in the following holders: Essentials (40 369 xx1/102 466 2430) Essentials Cube (40 508) | chrome |
|  | 40 656 001 Essentials Authentic Bathrobe hook material: metal concealed fastening GROHE Long-Life finish | chrome |
|  | 40 657 001 Essentials Authentic Toilet paper holder material: metal without cover concealed fastening GROHE Long-Life finish | chrome |
|  | 40 659 001 Essentials Authentic Filling basket, small material: metal concealed fastening GROHE Long-Life finish | chrome |

GROHTHERM THERMOSTATS





CONTENTS

| | |
|------------------------------|-----|
| Grohtherm SmartControl | 224 |
| Grohtherm 2 handle trim sets | 232 |
| Grohtherm 2000 | 237 |
| Grohtherm Cube | 238 |
| Grohtherm 1000 | 240 |
| Grohtherm 1000 Performance | 242 |
| Grohtherm 800 Cosmopolitan | 243 |
| Grohtherm 800 | 244 |
| Grohtherm 500 | 245 |

SAFETY NOTE

Avoiding scalding

For a relaxing and comfortable shower and to avoid scalding, GROHE recommends the use of a thermostat. For particular environments, (hospitals, schools, care and nursing homes) it is extremely important that the outlet temperature of the water can be limited to a maximum of 43° C. The Grohtherm thermostats for shower and bath are delivered with an appropriate temperature stop to limit the temperature.

In shower facilities in kindergartens and special areas like nursing homes, it is recommended, that the temperature should not exceed 38° C. In these cases we recommend the Grohtherm Special with a specific ergonomic handle for better grip and additionally it enables easy thermal disinfection.


Applicable standards (e.g. EN 806-2) and technical rules for drinking water are to be taken in account.

GROHE

GROHTHERM SMARTCONTROL

Ref. no.

Colour



| | |
|------------|-----------------------|
| 29 123 000 | chrome |
| 29 123 DC0 | supersteel |
| 29 123 GN0 | brushed cool sunrise |
| 29 123 DL0 | brushed warm sunset |
| 29 123 A00 | hard graphite |
| 29 123 AL0 | brushed hard graphite |

Grohtherm SmartControl

Safety mixer for concealed installation with one valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C


GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers

flow performance: outlet A (to external shut-off) = 34 l/min, outlet B/C = 29 l/min



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



| | |
|------------|-----------------------|
| 29 124 000 | chrome |
| 29 124 DC0 | supersteel |
| 29 124 GL0 | cool sunrise |
| 29 124 GN0 | brushed cool sunrise |
| 29 124 DA0 | warm sunset |
| 29 124 DL0 | brushed warm sunset |
| 29 124 A00 | hard graphite |
| 29 124 AL0 | brushed hard graphite |

Grohtherm SmartControl

Safety mixer for concealed installation with 2 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers

multiple outlets can be run simultaneously


flow performance: outlet B = 24 l/min, outlet C = 26 l/min, outlet B+C = 29 l/min

102166 KF0 0 phantom black
ditto, Professional exclusive



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



29 125 000 chrome

Grohtherm SmartControl

Safety mixer for concealed installation with 2 valves
and integrated shower holder

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers

multiple outlets can be run simultaneously

integrated shower union with shower outlet 1/2"

flow performance: outlet B = 24 l/min, hand shower = 12 l/min, outlet B + hand
shower = 27 l/min




35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation

GROHE

GROHTHERM SMARTCONTROL



Ref. no.

Colour

| | |
|------------|-----------------------|
| 29 126 000 | chrome |
| 29 126 DC0 | supersteel |
| 29 126 GL0 | cool sunrise |
| 29 126 GN0 | brushed cool sunrise |
| 29 126 DAO | warm sunset |
| 29 126 DLO | brushed warm sunset |
| 29 126 A00 | hard graphite |
| 29 126 AL0 | brushed hard graphite |

Grohterm SmartControl

Safety mixer for concealed installation with 3 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers

multiple outlets can be run simultaneously

flow performance: outlet A = 23 l/min, outlet B = 27 l/min, outlet C = 23 l/min,


outlet A + B = 33 l/min, outlet A + B + C = 36 l/min

102167 KF0 0 phantom black
ditto, Professional exclusive



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



| | |
|------------|-----------------------|
| 29 127 000 | chrome |
| 29 127 DC0 | supersteel |
| 29 127 GN0 | brushed cool sunrise |
| 29 127 DLO | brushed warm sunset |
| 29 127 A00 | hard graphite |
| 29 127 AL0 | brushed hard graphite |

Grohterm SmartControl

Triple volume control trim

final installation for GROHE Rapido SmartBox 35 600/35 604/35 601

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE ProGrip with knurl structure

multiple outlets can be run simultaneously


flow performance: outlet D = 28 l/min, outlet E = 28 l/min, outlet A = 28 l/min,

outlet D+E+A = 65 l/min



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



29 153 LS0 moon white/chrome

Grohterm SmartControl

Safety mixer for concealed installation with one valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers

cover plate in moon white acrylic glass

flow performance: outlet A (to external shut-off) = 34 l/min, outlet B/C = 29 l/min



35 604 000


GROHE Rapido SmartBox universal rough-in box for concealed installation

GROHE

GROHTHERM SMARTCONTROL

Ref. no.

Colour



29 156 LS0 moon white/chrome

Grohterm SmartControl

Safety mixer for concealed installation with 2 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers


multiple outlets can be run simultaneously

cover plate in moon white acrylic glass

flow performance: outlet B = 24 l/min, outlet C = 26 l/min, outlet B+C = 29 l/min

35 604 000

**GROHE Rapido SmartBox universal rough-in box for concealed
installation**



29 157 LS0 moon white/chrome

Grohterm SmartControl

Safety mixer for concealed installation with 3 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers

multiple outlets can be run simultaneously


cover plate in moon white acrylic glass

flow performance: outlet A = 23 l/min, outlet B = 27 l/min, outlet C = 23 l/min,

outlet A + B = 33 l/min, outlet A + B + C = 36 l/min

35 604 000

**GROHE Rapido SmartBox universal rough-in box for concealed
installation**



29 158 LS0 moon white/chrome

Grohterm SmartControl

Triple volume control trim

final installation for GROHE Rapido SmartBox 35 600/35 604/35 601

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE ProGrip with knurl structure

multiple outlets can be run simultaneously

cover plate in moon white acrylic glass

flow performance: outlet D = 28 l/min, outlet E = 28 l/min, outlet A = 28 l/min,


outlet D+E+A = 65 l/min

35 604 000

**GROHE Rapido SmartBox universal rough-in box for concealed
installation**

GROHE

GROHTHERM SMARTCONTROL



Ref. no.

Colour

| | |
|------------|-----------------------|
| 29 118 000 | chrome |
| 29 118 DCO | supersteel |
| 29 118 GLO | cool sunrise |
| 29 118 GN0 | brushed cool sunrise |
| 29 118 DAO | warm sunset |
| 29 118 DL0 | brushed warm sunset |
| 29 118 A00 | hard graphite |
| 29 118 AL0 | brushed hard graphite |

Grohterm SmartControl

Safety mixer for concealed installation with one valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers

flow performance: outlet A (to external shut-off) = 34 l/min, outlet B/C = 29 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation

| | |
|------------|-----------------------|
| 29 119 000 | chrome |
| 29 119 DCO | supersteel |
| 29 119 GLO | cool sunrise |
| 29 119 GN0 | brushed cool sunrise |
| 29 119 DAO | warm sunset |
| 29 119 DL0 | brushed warm sunset |
| 29 119 A00 | hard graphite |
| 29 119 AL0 | brushed hard graphite |

Grohterm SmartControl

Safety mixer for concealed installation with 2 valves
final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers
multiple outlets can be run simultaneously

flow performance: outlet B = 24 l/min, outlet C = 26 l/min, outlet B+C = 29 l/min

29 507 KF0 phantom black

ditto, Professional exclusive

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed
installation

29 120 000 chrome

Grohterm SmartControl

Safety mixer for concealed installation with 2 valves
and integrated shower holder

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure


GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers
multiple outlets can be run simultaneously
integrated shower union with shower outlet 1/2"

flow performance: outlet B = 24 l/min, hand shower = 12 l/min, outlet B + hand
shower = 27 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation




GROHE

GROHTHERM SMARTCONTROL

Ref. no.

Colour



| | |
|------------|-----------------------|
| 29 121 000 | chrome |
| 29 121 DC0 | supersteel |
| 29 121 GL0 | cool sunrise |
| 29 121 GN0 | brushed cool sunrise |
| 29 121 DAO | warm sunset |
| 29 121 DL0 | brushed warm sunset |
| 29 121 A00 | hard graphite |
| 29 121 AL0 | brushed hard graphite |

Grohterm SmartControl

Safety mixer for concealed installation with 3 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers

multiple outlets can be run simultaneously


flow performance: outlet A = 23 l/min, outlet B = 27 l/min, outlet C = 23 l/min,
outlet A + B = 33 l/min, outlet A + B + C = 36 l/min

| | |
|-------------------------------|---------------|
| 29 508 KF0 | phantom black |
| ditto, Professional exclusive | |



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



| | |
|------------|-----------------------|
| 29 122 000 | chrome |
| 29 122 DC0 | supersteel |
| 29 122 GL0 | cool sunrise |
| 29 122 GN0 | brushed cool sunrise |
| 29 122 DAO | warm sunset |
| 29 122 DL0 | brushed warm sunset |
| 29 122 A00 | hard graphite |
| 29 122 AL0 | brushed hard graphite |

Grohterm SmartControl

Triple volume control trim

final installation for GROHE Rapido SmartBox 35 600/35 604/35 601

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment


exchangeable symbols

GROHE ProGrip with knurl structure

multiple outlets can be run simultaneously

flow performance: outlet D = 28 l/min, outlet E = 28 l/min, outlet A = 28 l/min,
outlet D+E+A = 65 l/min

| | |
|------------|--|
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|------------|--|



| | |
|------------|-------------------|
| 29 150 LS0 | moon white/chrome |
|------------|-------------------|

Grohterm SmartControl

Safety mixer for concealed installation with one valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment

exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers



cover plate in moon white acrylic glass

flow performance: outlet A (to external shut-off) = 34 l/min, outlet B/C = 29 l/min

| | |
|------------|--|
| 35 604 000 | GROHE Rapido SmartBox universal rough-in box for concealed installation |
|------------|--|

GROHE

GROHTHERM SMARTCONTROL



GROHE



29 151 LS0

Colour

moon white/chrome

Grohterm SmartControl

Safety mixer for concealed installation with 2 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers



multiple outlets can be run simultaneously

cover plate in moon white acrylic glass

flow performance: outlet B = 24 l/min, outlet C = 26 l/min, outlet B+C = 29 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



GROHE



29 904 LS0

moon white/chrome

Grohterm SmartControl

Safety mixer for concealed installation with 3 valves

final installation for GROHE Rapido SmartBox (35 604)

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

built-in non-return valves and dirt strainers

multiple outlets can be run simultaneously



cover plate in moon white acrylic glass

flow performance: outlet A = 23 l/min, outlet B = 27 l/min, outlet C = 23 l/min,

outlet A + B = 33 l/min, outlet A + B + C = 36 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



GROHE



29 152 LS0

moon white/chrome

Grohterm SmartControl

Triple volume control trim

final installation for GROHE Rapido SmartBox 35 600/35 604/35 601

GROHE FastFixation metal wall escutcheon, retroactively 6° adjustable

GROHE Long-Life finish

GROHE SmartControl push for ON-OFF, turn for volume adjustment
exchangeable symbols

GROHE ProGrip with knurl structure

multiple outlets can be run simultaneously


cover plate in moon white acrylic glass

flow performance: outlet D = 28 l/min, outlet E = 28 l/min, outlet A = 28 l/min,

outlet D+E+A = 65 l/min

35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation

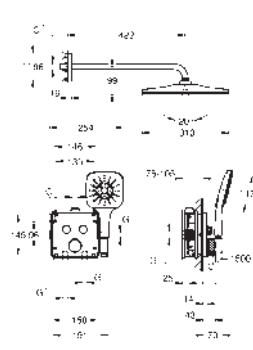

34 865 000

chrome
phantom black

Grohterm SmartControl

Concealed shower system with Rainshower Mono 310 Cube

consisting of:

concealed thermostat with 2 valves and integrated shower holder (29 125)

GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)

Rainshower Mono 310 Cube head shower set (26 563) including horizontal shower arm 422 mm (26 145)

hand shower Rainshower SmartActive 130 Cube (26 550)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

optional flow regulator 9.5 l/min included for hand shower and head shower

GROHE

GROHTHERM SMARTCONTROL

| | Ref. no. | Colour |
|---|--|--|
|  | 34 864 000 34 864 DCO 34 864 GLO 34 864 GN0 34 864 DAO 34 864 DL0 34 864 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite |
| | Grohtherm SmartControl Concealed shower system with Rainshower SmartActive 310 Cube consisting of: concealed safety mixer with 3 valves (29 126) | |
| | GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604) Rainshower SmartActive 310 Cube head shower set 2 sprays (26 479) including horizontal shower arm 430 mm and head shower rough-in (26 483) Rainshower SmartActive 130 Cube hand shower 3 sprays shower outlet elbow 1/2" with holder (26 659) Silverflex shower hose 1500 mm 1/2" x 1/2" optional flow regulator 9.5 l/min included for hand shower | |
|  | 34 867 000 | chrome |
| | Grohtherm SmartControl Concealed shower system with Euphoria 260 consisting of: concealed thermostat with 2 valves and integrated shower holder (29 120) GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604) Euphoria 260 head shower set 3 sprays (26 458) including horizontal shower arm 380 mm (28 361) Euphoria Cosmopolitan Stick hand shower 1 spray (27 367) Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) optional flow regulator 9.5 l/min included for hand shower and head shower | |
|  | 34 866 000 | chrome |
| | Grohtherm SmartControl Concealed shower system with Rainshower Mono 310 consisting of: concealed thermostat with 2 valves and integrated shower holder (29 120) GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604) Rainshower Mono 310 head shower set (26 557) including horizontal shower arm 422 mm (26 146) hand shower Rainshower SmartActive 130 (26 544) Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) optional flow regulator 9.5 l/min included for hand shower and head shower | |
|  | 34 863 000 34 863 DCO 34 863 GLO 34 863 GN0 34 863 DAO 34 863 DL0 34 863 AL0 34 863 KFO | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset brushed hard graphite phantom black |
| | Grohtherm SmartControl Concealed shower system with Rainshower SmartActive 310 consisting of: concealed safety mixer with 3 valves (29 121) GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604) Rainshower SmartActive 310 head shower set 2 sprays (26 475) including horizontal shower arm 430 mm and head shower rough-in (26 483) Rainshower SmartActive 130 hand shower 3 sprays shower outlet elbow 1/2" with holder (26 658) Silverflex shower hose 1500 mm 1/2" x 1/2" optional flow regulator 9.5 l/min included for hand shower | |

GROHE


GROHTHERM SMARTCONTROL

Ref. no.

Colour




14 077 XH0 chrome/frosted granite
SmartControl Caps concealed
 9 caps with 6 different symbols
 fits Grohterm SmartControl and SmartControl mixer



34 719 000 chrome
Grohterm SmartControl Shower Safety mixer
 wall mounted
 GROHE CoolTouch no risk of scalding
 GROHE Long-Life finish
 GROHE SafeStop safety button at 38C
 GROHE SafeStop Plus optional temperature limiter at 43°C included
 GROHE TurboStat compact cartridge
 GROHE ProGrip with knurl structure
 GROHE SmartControl push for ON-OFF, turn for volume adjustment
 integrated GROHE EasyReach shower tray
 shower bottom outlet 1/2"
 built-in non-return valves and dirt strainers
 protected against backflow

102169 KF0 0 phantom black
 ditto, Professional exclusive



34 718 000 chrome
Grohterm SmartControl Bath Safety Mixer
 wall mounted
 GROHE CoolTouch no risk of scalding
 GROHE Long-Life finish
 GROHE SafeStop safety button at 38C
 GROHE SafeStop Plus optional temperature limiter at 43°C included
 GROHE TurboStat compact cartridge
 GROHE ProGrip with knurl structure
 GROHE SmartControl push for ON-OFF, turn for volume adjustment
 integrated GROHE EasyReach shower tray
 shower bottom outlet 1/2"
 bath spout with mousseur
 built-in non-return valves and dirt strainers
 protected against backflow

102168 KF0 0 phantom black
 ditto, Professional exclusive





14 079 XH0 chrome/frosted granite
SmartControl Caps exposed
 3 caps with 3 different symbols
 fits Euphoria SmartControl shower systems

GROHE

GROHTHERM 2 HANDLE TRIM SETS

Ref. no.

Colour



24 078 000

chrome

Grohterm

Safety mixer for 1 outlet with shut off valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
built-in non-return valves and dirt strainers
ceramic stop valve, 120°

outlet B = 27 l/min, outlet C = 30 l/min

102215 243 0



matte black

ditto, Professional exclusive



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



24 079 000

chrome

Grohterm

Safety shower mixer for 2 outlets with integrated shut off/diverter valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
printed head and hand shower symbol

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
GROHE AquaDimmer, integrated shut off/diverter valve
outlet B = 27 l/min, outlet C = 30 l/min

102209 243 0



matte black

ditto, Professional exclusive



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed
installation



24 080 000

chrome

Grohterm

Safety bath tub mixer for 2 outlets with integrated shut off/diverter valve
final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable
printed hand shower and bath filler symbol

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included
GROHE AquaDimmer, integrated shut off/diverter valve
outlet B = 27 l/min, outlet C = 30 l/min

102211 243 0

matte black

ditto, Professional exclusive



35 604 000


GROHE Rapido SmartBox universal rough-in box for concealed
installation

GROHE

GROHTHERM 2 HANDLE TRIM SETS

Ref. no.

Colour




34 870 000

chrome

Grohterm

Concealed shower system with Rainshower Mono 310 Cube

consisting of:
concealed thermostatic shower mixer for 2 outlets with integrated shut off/diverter valve (24 079)
GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)
Rainshower Mono 310 Cube head shower set (26 563) including horizontal shower arm 422 mm (26 145)
hand shower Euphoria Cube Stick, 1 spray (27 698)
shower outlet elbow 1/2" with holder (26 659)
Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)
optional flow regulator 9.5 l/min included for hand shower and head shower

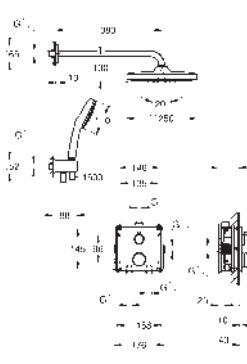


34 871 000

chrome

Grohterm

Concealed shower system with Tempesta 250 Cube

consisting of:
concealed thermostatic shower mixer for 2 outlets with integrated shut off/diverter valve (24 079)
GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)
Tempesta 250 Cube head shower set 9.5 l/min (26 687) including horizontal shower arm 380 mm
Tempesta 110 Cube hand shower 2 sprays (27 571)
shower outlet elbow 1/2" with wall shower holder (26 370)
Rotaflex shower hose 1500 mm 1/2" x 1/2" (28 409)
optional flow regulator 9.5 l/min included for hand shower

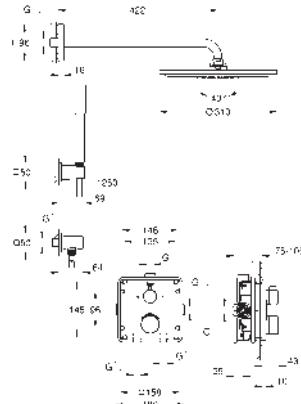


34 730 000

chrome

Grohterm

Perfect shower set with Rainshower Cosmopolitan 310

Grohterm set for final installation with Aquadimmer (24 079)
GROHE Rapido SmartBox (35 604)
Rainshower Cosmopolitan 310 metal head shower (27 477)
Rainshower shower arm 422 mm (26 145)
handshower (28 034)
Rainshower wall holder (27 075)
Rainshower wall elbow connection (27 076)
Silverflex shower hose 1.250 mm (28 362)

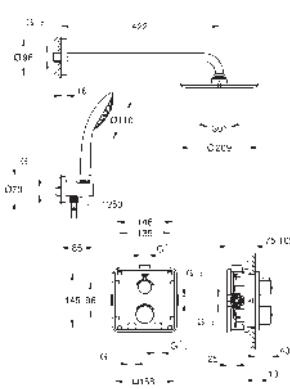

34 734 000

chrome

Grohterm

Perfect shower set with Rainshower Cosmopolitan 210



Grohterm set for final installation with Aquadimmer (24 079)
GROHE Rapido SmartBox (35 604)
Rainshower Cosmopolitan 210 metal head shower (28 368)
shower arm Rainshower 422 mm (26 146)
Euphoria hand shower (27 265)
shower outlet elbow (28 628)
Silverflex shower hose 1.250 mm (28 362)

GROHE

GROHTHERM 2 HANDLE TRIM SETS

Ref. no.

Colour



24 075 000

chrome

Grohterm

Safety mixer for 1 outlet with shut off valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included built-in non-return valves and dirt strainers

ceramic stop valve, 120°



outlet B = 27 l/min, outlet C = 30 l/min

102212 243 0 matte black
ditto, Professional exclusive



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



24 076 000

chrome

Grohterm

Safety shower mixer for 2 outlets with integrated shut off/diverter valve final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable printed head and hand shower symbol

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included GROHE AquaDimmer, integrated shut off/diverter valve



outlet B = 27 l/min, outlet C = 30 l/min

102208 243 0 matte black
ditto, Professional exclusive



35 604 000

GROHE Rapido SmartBox universal rough-in box for concealed installation



24 077 000

chrome

Grohterm

Safety bath tub mixer for 2 outlets with integrated shut off/diverter valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable printed hand shower and bath filler symbol

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included GROHE AquaDimmer, integrated shut off/diverter valve

outlet B = 27 l/min, outlet C = 30 l/min

102210 243 0 matte black
ditto, Professional exclusive



35 604 000


GROHE Rapido SmartBox universal rough-in box for concealed installation

GROHE

GROHTHERM 2 HANDLE TRIM SETS

Ref. no.

Colour



34 869 000

chrome

Grohterm

Concealed shower system with Rainshower Mono 310

consisting of:
concealed thermostatic shower mixer for 2 outlets with integrated shut off/diverter valve (24 076)


GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)

Rainshower Mono 310 head shower set (26 557) including horizontal shower arm 422 mm (26 146)
Euphoria Cosmopolitan Stick hand shower 1 spray (27 367)

shower outlet elbow 1/2" with holder (26 658)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

optional flow regulator 9.5 l/min included for hand shower and head shower



34 872 000

chrome

Grohterm

Concealed shower system with Tempesta 250

consisting of:
concealed thermostatic shower mixer for 2 outlets with integrated shut off/diverter valve (24 076)


GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)

Tempesta 250 head shower set 9.5 l/min (26 668) including horizontal shower arm 380 mm
Tempesta 110 hand shower 2 sprays (27 597)

shower outlet elbow 1/2" with wall shower holder (28 679)

Rotaflex shower hose 1500 mm 1/2" x 1/2" (28 409)

optional flow regulator 9.5 l/min included for hand shower



34 726 000

chrome

Grohterm


Perfect shower set with Tempesta 210

Grohterm set for final installation with Aquadimmer (24 076)

GROHE Rapido SmartBox (35 604)

head shower Tempesta 210 9.5 l/min (26 410)

Shower arm Rainshower 286 mm (28 576)

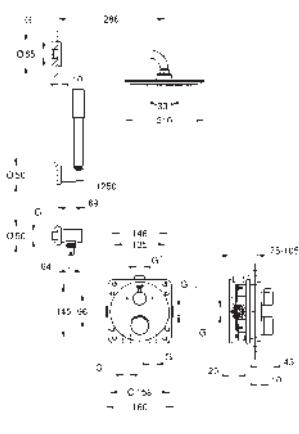

34 732 000

chrome

Grohterm

Perfect shower set with Rainshower Cosmopolitan 210

Grohterm set for final installation with Aquadimmer (24 076)

GROHE Rapido SmartBox (35 604)

Rainshower Cosmopolitan 210 metal head shower (28 373)

Rainshower shower arm 286 mm (28 576)

handshower (28 034)

Rainshower wall holder (27 074)

Rainshower wall elbow connection (27 057)


Silverflex shower hose 1.250 mm (28 362)

GROHE

GROHTHERM 2 HANDLE TRIM SETS

Ref. no.

Colour



24 153 000
24 153 DC0
24 153 AL0

chrome
supersteel
brushed hard graphite

Grohterm Cube

Safety mixer for 1 outlet with shut off valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable


GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included built-in non-return valves and dirt strainers

ceramic stop valve, 120°

outlet B = 27 l/min, outlet C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



24 154 000
24 154 DC0
24 154 AL0

chrome
supersteel
brushed hard graphite

Grohterm Cube

Safety shower mixer for 2 outlets with integrated shut off/diverter valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

printed head and hand shower symbol


GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

GROHE AquaDimmer, integrated shut off/diverter valve

outlet B = 27 l/min, outlet C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



24 155 000
24 155 DC0
24 155 AL0

chrome
supersteel
brushed hard graphite

Grohterm Cube

Safety bath tub mixer for 2 outlets with integrated shut off/diverter valve

final installation for GROHE Rapido SmartBox (35 604)

GROHE TurboStat compact cartridge

GROHE Long-Life finish

GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable

printed hand shower and bath filler symbol


GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included

GROHE AquaDimmer, integrated shut off/diverter valve

outlet B = 27 l/min, outlet C = 30 l/min

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed installation



34 868 000 chrome

Grohterm Cube

Concealed shower system with Rainshower Mono 310 Cube

consisting of:

concealed thermostatic shower mixer for 2 outlets with integrated shut off/diverter valve (24 154)

GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604)

Rainshower Mono 310 Cube head shower set (26 563) including horizontal shower arm 422 mm (26 145)

hand shower Euphoria Cube Stick, 1 spray (27 698)


shower outlet elbow 1/2" with holder (26 659)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

optional flow regulator 9.5 l/min included for hand shower and head shower


GROHE

GROHTHERM 2000




| Ref. no. | Colour |
|------------|--------|
| 34 469 001 | chrome |

Grohterm 2000
Shower Safety mixer
 wall mounted
 100% GROHE CoolTouch safety housing with CoolTouch escutcheons
 GROHE Long-Life finish
 GROHE Aqua Paddle ergonomically shaped handles
 GROHE SafeStop at 38C
 GROHE SafeStop Plus optional temperature limiter at 43°C included
 integrated stop valve
GROHE TurboStat compact cartridge
 volume handle with **GROHE EcoButton**
 Carbodur ceramic headpart 1/2", 180°
 shower bottom outlet 1/2"
 built-in non-return valves, dirt strainers
 covered S-unions, CoolTouch escutcheons with wall sealing
GROHE EasyReach shower tray, removable for easy cleaning
GROHE Water Saving - Less water, perfect flow




| Ref. no. | Colour |
|------------|--------|
| 34 169 001 | chrome |

Grohterm 2000
Shower Safety mixer
 wall mounted
 100% GROHE CoolTouch safety housing with CoolTouch escutcheons
 GROHE Long-Life finish
 GROHE Aqua Paddle ergonomically shaped handles
 GROHE SafeStop safety button at 38C
 GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
 integrated stop valve
 volume handle with **GROHE EcoButton**
 Carbodur ceramic headpart 1/2", 180°
 shower bottom outlet 1/2"
 built-in non-return valves, dirt strainers
 covered S-unions, CoolTouch escutcheons with wall sealing
 optional upgrade: GROHE EasyReach shower tray (18 608 001)
GROHE Water Saving - Less water, perfect flow



| Ref. no. | Colour |
|------------|--------|
| 34 464 001 | chrome |

Grohterm 2000
Bath Safety Mixer
 wall mounted
 100% GROHE CoolTouch safety housing with CoolTouch escutcheons
 GROHE Long-Life finish
 GROHE Aqua Paddle ergonomically shaped handles
 GROHE SafeStop safety button at 38C
 GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
 integrated stop valve
GROHE AquaDimmer Eco with multiple function:
 integrated **GROHE EcoButton**, flow control, diverter: bath/shower
 shower bottom outlet 1/2"
 GROHE XL Waterfall
 built-in non-return valves, dirt strainers
 covered S-unions, CoolTouch escutcheons with wall sealing
GROHE EasyReach shower tray, removable for easy cleaning
GROHE Water Saving - Less water, perfect flow



| Ref. no. | Colour |
|------------|--------|
| 34 174 001 | chrome |


Grohterm 2000
Bath Safety Mixer
 wall mounted
 100% GROHE CoolTouch safety housing with CoolTouch escutcheons
 GROHE Long-Life finish
 GROHE Aqua Paddle ergonomically shaped handles
 GROHE SafeStop safety button at 38C
 GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
 integrated stop valve
GROHE AquaDimmer Eco with multiple function:
 integrated **GROHE EcoButton**, flow control, diverter: bath/shower
 shower bottom outlet 1/2"
 GROHE XL Waterfall
 built-in non-return valves, dirt strainers
 covered S-unions, CoolTouch escutcheons with wall sealing
 optional upgrade: GROHE EasyReach shower tray (18 608 001)
GROHE Water Saving - Less water, perfect flow

GROHE

GROHTHERM CUBE

| | Ref. no. | Colour |
|---|---|---|
|  | 34 488 000 Grohterm Cube Shower Safety mixer wall mounted GROHE Long-Life finish GROHE SafeStop safety button at 38C GROHE SafeStop Plus optional temperature limiter at 43°C included GROHE TurboStat compact cartridge integrated stop valve volume handle with GROHE EcoButton Carbodur ceramic headpart 1/2", 180° shower bottom outlet 1/2" built-in non-return valves, dirt strainers covered S-unions GROHE Water Saving - Less water, perfect flow | chrome |
|  | 34 497 000 Grohterm Cube Bath Safety Mixer wall mounted GROHE Long-Life finish GROHE SafeStop safety button at 38C GROHE SafeStop Plus optional temperature limiter at 43°C included GROHE TurboStat compact cartridge integrated stop valve GROHE AquaDimmer Eco with multiple function: integrated GROHE EcoButton, flow control, diverter: bath/shower shower bottom outlet 1/2" GROHE XL Waterfall built-in non-return valves, dirt strainers covered S-unions GROHE Water Saving - Less water, perfect flow | chrome |
|  | 24 153 000 24 153 DC0 24 153 AL0 Grohterm Cube Safety mixer for 1 outlet with shut off valve final installation for GROHE Rapido SmartBox (35 604) GROHE TurboStat compact cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable GROHE SafeStop safety button at 38C GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included built-in non-return valves and dirt strainers ceramic stop valve, 120° outlet B = 27 l/min, outlet C = 30 l/min | chrome supersteel brushed hard graphite |
|  | 24 154 000 24 154 DC0 24 154 AL0 Grohterm Cube Safety shower mixer for 2 outlets with integrated shut off/diverter valve final installation for GROHE Rapido SmartBox (35 604) GROHE TurboStat compact cartridge GROHE Long-Life finish GROHE FastFixation escutcheon with covered shaft sealing and covered fixing metal escutcheon, retroactively 6° adjustable printed head and hand shower symbol GROHE SafeStop safety button at 38C GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included GROHE AquaDimmer, integrated shut off/diverter valve outlet B = 27 l/min, outlet C = 30 l/min | chrome supersteel brushed hard graphite |
|  | 35 604 000 GROHE Rapido SmartBox universal rough-in box for concealed installation | |

GROHE GROHTHERM CUBE




Ref. no.

Colour

| | |
|--|-----------------------|
| 24 155 000 | chrome |
| 24 155 DCO | supersteel |
| 24 155 AL0 | brushed hard graphite |
| Grohtherm Cube | |
| Safety bath tub mixer for 2 outlets with integrated shut off/diverter valve | |
| final installation for GROHE Rapido SmartBox (35 604) | |
| GROHE TurboStat compact cartridge | |
| GROHE Long-Life finish | |
| GROHE FastFixation escutcheon with covered shaft sealing and covered fixing | |
| metal escutcheon, retroactively 6° adjustable | |
| printed hand shower and bath filler symbol | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C or 46°C included | |
| GROHE AquaDimmer, integrated shut off/diverter valve | |
| outlet B = 27 l/min, outlet C = 30 l/min | |

PROFESSIONAL GROHE

35 604 000
GROHE Rapido SmartBox universal rough-in box for concealed
installation




34 868 000 chrome

| | |
|--|--------|
| Grohtherm Cube | chrome |
| Concealed shower system with Rainshower Mono 310 Cube | |
| consisting of: | |
| concealed thermostatic shower mixer for 2 outlets with integrated shut off/diverter valve (24 154) | |
| GROHE Rapido SmartBox universal rough-in box, 1/2" (35 604) | |
| Rainshower Mono 310 Cube head shower set (26 563) including horizontal shower arm 422 mm (26 145) | |
| hand shower Euphoria Cube Stick, 1 spray (27 698) | |
| shower outlet elbow 1/2" with holder (26 659) | |
| Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) | |
| optional flow regulator 9.5 l/min included for hand shower and head shower | |

GROHE GROHTHERM 1000

Ref. no.

Colour




PROFESSIONAL GROHE

34 814 003

chrome

Grohterm 1000
Shower Safety mixer
wall mounted
GROHE CoolTouch safety housing
GROHE Long-Life finish
GROHE MetalGrip ergonomically shaped metal handles
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
integrated stop valve
volume handle with **GROHE EcoButton**
ceramic headpart 1/2", 180°
shower bottom outlet 1/2"
built-in non-return valves
dirt strainers
protected against backflow
S-unions
metal rosette
GROHE Water Saving - Less water, perfect flow




PROFESSIONAL GROHE

34 816 003

chrome

Grohterm 1000
Bath Safety Mixer
wall mounted
GROHE CoolTouch safety housing
GROHE Long-Life finish
GROHE MetalGrip ergonomically shaped metal handles
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
integrated stop valve
GROHE AquaDimmer Eco with multiple function:
integrated GROHE EcoButton
flow control
diverter: bath/shower
shower bottom outlet 1/2"
mousseur
built-in non-return valves
dirt strainers
protected against backflow
S-unions
metal rosette
GROHE Water Saving - Less water, perfect flow




34 824 005

chrome

Grohterm 1000
Shower Safety mixer
with shower rail set 2 sprays (Rain, Jet)
consisting of:
Grohterm 1000 thermostatic shower mixer 1/2" (34 814)
Tempesta Cube shower rail set, 900 mm (26 908)
professional edition

GROHE GROHTHERM 1000



Ref. no. Colour


34 819 005 chrome
**Grohterm 1000
Shower Safety mixer**
with shower rail set 2 sprays (Rain, Jet)
consisting of:
Grohterm 1000 thermostatic shower mixer 1/2" (34 817) without unions
Tempesta Cube shower rail set, 600 mm (26 748)
professional edition

GROHE

GROHTHERM 1000 PERFORMANCE


Ref. no.

Colour




34 827 000 chrome
34 827 KFO phantom black

Grohterm 1000 Performance
Shower Safety mixer
wall mounted
GROHE CoolTouch safety housing
GROHE Long-Life finish
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
GROHE ProGrip with knurl structure
integrated stop valve
volume handle with **GROHE EcoButton**
ceramic headpart 1/2", 180°
shower bottom outlet 1/2"
built-in non-return valves
dirt strainers
protected against backflow
S-unions
metal rosette
GROHE Water Saving - Less water, perfect flow



34 830 000 chrome

Grohterm 1000 Performance
Bath Safety Mixer
wall mounted
GROHE CoolTouch safety housing
GROHE Long-Life finish
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
GROHE ProGrip with knurl structure
integrated stop valve
GROHE AquaDimmer Eco with multiple function:
integrated GROHE EcoButton
flow control
diverter: bath/shower
shower bottom outlet 1/2"
mousseur
built-in non-return valves
dirt strainers
protected against backflow
S-unions
metal rosette
GROHE Water Saving - Less water, perfect flow




34 834 001 chrome

Grohterm 1000 Performance
Shower Safety mixer
with shower rail set 2 sprays (Rain, Jet)
consisting of:
Grohterm 1000 Performance thermostatic shower mixer 1/2" (34 827)
Tempesta shower rail set, 600 mm (26 162)
professional edition

GROHE GROHTHERM 800 COSMOPOLITAN


Ref. no.

Colour




34 765 000 chrome

Grohterm 800 Cosmopolitan
Shower Safety mixer
wall mounted
GROHE Long-Life finish
GROHE MetalGrip ergonomically shaped metal handles
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
integrated stop valve
volume handle with **GROHE EcoButton**
ceramic headpart 1/2", 180°
shower bottom outlet 1/2"
built-in non-return valves
dirt strainers
S-unions
GROHE Water Saving - Less water, perfect flow



34 766 000 chrome

Grohterm 800 Cosmopolitan
Bath Safety Mixer
wall mounted
GROHE Long-Life finish
GROHE MetalGrip ergonomically shaped metal handles
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
integrated stop valve
automatic diverter: bath/shower
volume handle with **GROHE EcoButton**
ceramic headpart 1/2", 180°
shower bottom outlet 1/2"
mousseur
built-in non-return valves
dirt strainers
S-unions
GROHE Water Saving - Less water, perfect flow




34 768 001 chrome

Grohterm 800 Cosmopolitan
Shower Safety mixer
with shower rail set 2 sprays (Rain, Jet)
consisting of:
Grohterm 800 Cosmopolitan thermostatic shower mixer 1/2" (34 765)
Tempesta shower rail set, 600 mm (26 162)
professional edition


GROHE

GROHTHERM 800


Ref. no. Colour



34 558 000 chrome
Grohterm 800
Shower Safety mixer
 wall mounted
GROHE Long-Life finish
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
 integrated stop valve
 volume handle with **GROHE EcoButton**
 ceramic headpart 1/2", 180°
 shower bottom outlet 1/2"
 dirt strainers
 built-in non-return valves
 S-unions
GROHE Water Saving - Less water, perfect flow




34 567 000 chrome
Grohterm 800
Bath Safety Mixer
 wall mounted
GROHE Long-Life finish
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE TurboStat compact cartridge
 integrated stop valve
 automatic diverter: bath/shower
 volume handle with **GROHE EcoButton**
 ceramic headpart 1/2", 180°
 shower bottom outlet 1/2"
 mousseur
 built-in non-return valves
 dirt strainers
 S-unions
GROHE Water Saving - Less water, perfect flow



34 565 002 chrome
Grohterm 800
Shower Safety mixer
 with shower rail set 2 sprays (Rain, Jet)
 consisting of:
 Grohterm 800 thermostatic shower mixer 1/2" (34 558)
 Tempesta shower rail set, 600 mm (26 162)
 professional edition

GROHE

GROHTHERM 500




Ref. no.

Colour

34 793 000
34 793 2430

chrome
matte black

Grohterm 500
Shower Safety mixer
wall mounted
GROHE Long-Life finish
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE thermostatic cartridge with wax thermoelement
integrated stop valve
volume handle with **GROHE EcoButton**
headpart 90°
shower bottom outlet 1/2"
built-in non-return valves
dirt strainers
protected against backflow
S-unions
metal rosette
GROHE Water Saving - Less water, perfect flow
professional edition



34 796 001

chrome

Grohterm 500
Shower Safety mixer
with shower rail set 1 spray (Rain)
consisting of:
Grohterm 500 thermostatic shower mixer 1/2" (34 793)
Tempesta shower rail set, 600 mm (27 924)
professional edition

GROHE CONCEALED SOLUTIONS



CONTENTS

| | |
|------------------------------|-----|
| GROHE Rapido SmartBox | 248 |
| GROHE Rapido Shower Frame | 249 |
| GROHE Rapido C / stop valves | 250 |
| GROHE Rapido T | 251 |


GROHE RAPIDO SMARTBOX

Ref. no.

Colour




PROFESSIONAL GROHE



35 604 000


Rapido SmartBox
Universal rough-in box, 1/2"
3 outlets 1/2"
2 inlets below, 1/2"
installation depth 75-105 mm
connection unit in DR brass
pre-mounted flushing plug
stable build-in box and protective cover
fixation options for solid walls and dry cladding
gasket
without set for final installation



14 048 000


chrome

Rapido SmartBox
Universal extension set single-lever mixers, 25 mm
fits Grohtherm SmartControl and SmartControl Mixer sets
for final installation with up to three functions in combination
with GROHE Rapido SmartBox




14 056 000

Universal extension set single-lever mixers, 25 mm
fits for concealed single-lever mixers in combination with
GROHE Rapido SmartBox



14 057 000

Universal extension set single-lever mixers, 50 mm
fits for concealed single-lever mixers in combination with
GROHE Rapido SmartBox



14 058 000


chrome

Universal extension set 2-handle thermostats, 25 mm
fits for concealed 2-handle thermostats in combination with
GROHE Rapido SmartBox

GROHE RAPIDO SHOWER FRAME

Ref. no.

Colour

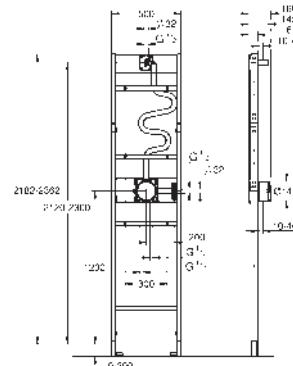

103993 999 0

Rapido Shower Frame

Element for mono concealed shower installation

for shower installations with one hand shower and a Mono head shower

pre-mounted rough-in set GROHE Rapido SmartBox (35 604)

pre-mounted wall outlets for hand and head shower

pre-mounted and insulated mixed water pipes

for on-the-wall installations or dry-cladding

powder coated steel frame, self-supporting

completely pre-assembled

depth adjustable

2 inlets below, 1/2"

min. installation depth (from rough wall to end finish) 77-107 mm

min. installation depth (from rough wall to frame front) 67 mm

head shower outlet height adjustable by 180 mm

sealing fleeces


leak test done ex factory

suitable for concealed 2-function trim sets

suitable for GROHE shower outlet elbows with male connection threads, 1/2"

suitable for GROHE shower arms with male connection threads, 1/2"

for on-the-wall installation please order wall brackets 103 999 9990 (sold separately)

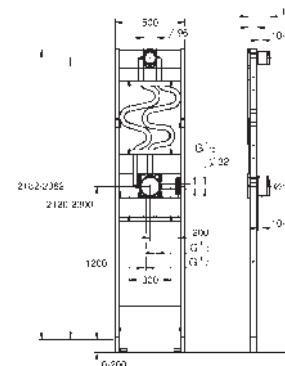

103994 999 0

Rapido Shower Frame

Element for duo concealed shower installation

for shower installations with one hand shower and a duo spray head shower

pre-mounted rough-in set GROHE Rapido SmartBox (35 604)

pre-mounted rough-in set 9.5 l/min for head shower (26 484)

pre-mounted wall outlet for hand shower

pre-mounted and insulated mixed water pipes

for on-the-wall installations or dry-cladding

powder coated steel frame, self-supporting

completely pre-assembled

depth adjustable

2 inlets below, 1/2"

min. installation depth (from rough wall to end finish) 77-107 mm

min. installation depth (from rough wall to frame front) 67 mm

head shower outlet height adjustable by 180 mm

sealing fleeces

leak test done ex factory

suitable for concealed 3-function trim sets

suitable for GROHE shower outlet elbows with male connection threads, 1/2"

suitable for Rainshower SmartActive 310 2-spray head shower with 430 mm shower arm

for on-the-wall installation please order wall brackets 103 999 9990 (sold separately)



103999 999 0

Wall brackets

for against-the-wall installations

for fixing elements at the brick-wall or in front of the studded wall

adjustment 85 - 145 mm


installation depth (from rough wall to frame front) 112 - 172 mm

4 pieces

professional edition

GROHE RAPIDO C / STOP VALVES


Ref. no. Colour



35 028 000

Rapido C


Rough-in for single volume control
built-in box with removable protection cover
waterproof membrane base for wall sealing
for masonry and drywall installation
fixing points for front and back wall
body of DR brass
pre-assembled ceramic headpart 3/4", connection threads 1/2"
flow rate: 55 l/min. at 3 bar
installation depth 70 - 95 mm



35 031 000

Rapido C

Rough-in box for triple volume control 26 880 000
for grid installation of Grohtherm Custom Shower system
built-in box with removable protection cover
waterproof membrane base for wall sealing
for masonry and drywall installation
fixing points for front and back wall, body of DR brass
pre-assembled ceramic headpart 3/4"
3 inlets and 3 outlets, connection threads 1/2"
flow rate at 3 bar
- one valve open 55 l/min.
- two valves open 110 l/min.
- three valves open 140 l/min.
installation depth 70 - 95 mm



29 800 000

chrome


Concealed stop-valve, 1/2"
pre-assembled headpart 1/2"
short spindle, protection sleeve
threaded union 1/2"
DR-brass



29 802 000

chrome


ditto, 3/4", pre-assembled headpart 3/4", thread union 3/4"



29 805 000

chrome


ditto, 1", pre-assembled headpart 1", thread union 1"



29 032 000

Concealed body

pre-assembled headpart 1/2"
threaded union 1/2"
installation depth infinitely adjustable
43 - 91 mm
DR-brass



29 033 000

5-way diverter

concealed body
wall installation
with ceramic sealing disks
connection cold and hot 1/2"
2 outlets 1/2"
1 bath outlet 3/4"
installation depth infinitely adjustable 66 - 113 mm
DR-brass


14 048 000

chrome

Rapido SmartBox

Universal extension set single-lever mixers, 25 mm
fits Grohtherm SmartControl and SmartControl Mixer sets
for final installation with up to three functions in combination
with GROHE Rapido SmartBox

GROHE RAPIDO T



Ref. no.

Colour


35 500 000

chrome

Rapido T

**Safety mixer for concealed installation
for use with Grohterm Special and Grohterm F**
without finishing trim set

flat installation depth 70 mm - 95 mm
easy to install, premounted and tested unit
GROHE TurboStat compact cartridge
two top outlets 1/2"
high flow rate up to 50l/min. by use of three outlets
bottom outlet 1/2" - can only be used
with separate stop valves
safe to install, stable built-in-box
and protective cap
fixation options for solid walls and dry cladding
wall sealing
Aquadimmer-diverter for bath mixer or
stopvalve for shower mixer in finishing trim set
body of DR brass
built-in non-return valves and dirt strainers
GROHE Water Saving - Less water, perfect flow



35 107 000

chrome

Grohterm F

Rough-in box for wall shower union 26 878 000
built-in box with removable protection cover
waterproof membrane base for wall sealing
flushing plug
for masonry and drywall installation
fixing points for front and back wall
body of DR brass
1/2" connections
installation depth 70 - 95 mm

GROHE SHOWERS






CONTENTS

| | | |
|----------------|--------------------------------|-----|
| Shower Systems | Rainshower System SmartControl | 254 |
| | Rainshower SmartActive System | 256 |
| | Rainshower System | 258 |
| | Euphoria SmartControl System | 259 |
| | Euphoria System | 262 |
| | Tempesta System 250 | 266 |
| | Shower system accessories | 277 |
| Head showers | Head shower sets | 281 |
| | Head showers | 288 |
| | Accessories for head showers | 292 |
| Showers | Rainshower SmartActive | 294 |
| | Euphoria | 301 |
| | Tempesta | 308 |
| | Tempesta Cube | 314 |
| | Tempesta-F trigger sprays | 319 |
| | Shower hoses | 321 |
| | Shower accessories | 324 |

GROHE RAINSHOWER SYSTEM SMARTCONTROL

Ref. no.

Colour



26 250 000 chrome

Rainshower System SmartControl Duo 360

Shower system with Safety Mixer for wall mounting

horizontal 500 mm shower arm

exposed SmartControl Safety Mixer

head shower Rainshower Duo 360, spray plate chrome

GROHE PureRain and Trio Massage

Power&Soul 115 hand shower, spray plate white (27 671)

hand shower wall holder (27 055)

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

minimum flow rate 10 l/min.

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE CoolTouch no risk of scalding

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartControl push for ON-OFF, turn for volume adjustment

GROHE EasyReach shower tray

SpeedClean anti-lime system


Inner WaterGuide for a longer life

suitable for instantaneous heaters from 18 kW/h

TwistStop to prevent hose from twisting

26 250 LS0 moon white

ditto, head shower with white spray plate



26 361 000 chrome

Rainshower System SmartControl Mono 360

Shower system with Safety Mixer for wall mounting

horizontal 500 mm shower arm

exposed SmartControl Safety Mixer

allows change between:

head shower Rainshower Mono 360, spray plate chrome

GROHE PureRain/GROHE Rain O² spray*

Power&Soul 130 hand shower, spray plate white (27 673)

hand shower wall holder (27 055)

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

minimum flow rate 10 l/min.

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE CoolTouch no risk of scalding

GROHE TurboStat compact cartridge

GROHE Water Saving - Less water, perfect flow

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartControl push for ON-OFF, turn for volume adjustment

GROHE EasyReach shower tray

SpeedClean anti-lime system

Inner WaterGuide for a longer life


suitable for instantaneous heaters from 18 kW/h

TwistStop to prevent hose from twisting

GROHE RAINSHOWER SYSTEM SMARTCONTROL

Ref. no.

Colour



26 443 000


chrome

Rainshower System SmartControl Duo 360
Combi shower system with safety mixer, exposed/concealed
 exposed/concealed SmartControl thermostat
 head shower Rainshower Duo 360 with horizontal 450 mm shower arm
 GROHE PureRain and Trio Massage
 maximum flow rate (at 3 bar): 21 l/min
 Power&Soul 115 hand shower, spray plate white (27 671)
 maximum flow rate (at 3 bar): 7.5 l/min
 hand shower wall holder (27 055)
 Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)
 minimum flow rate 10 l/min.
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
GROHE CoolTouch no risk of scalding
GROHE TurboStat compact cartridge
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE SmartControl push for ON-OFF, turn for volume adjustment
GROHE EasyReach shower tray
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
 requires rough-in set 26 264 and concealed unit 26 449

26 443 LS0


moon white

ditto, head shower with white spray plate



26 264 001

Rainshower 360
Rough-in box for head shower set 26 254
 inlets and outlets 1/2"
 fixing points for back wall
 leakproof housing
 removable protection cover with installation information



26 449 000


Concealed body for exposed/concealed variants
 wall mounted
 2 outlets 1/2"
 installation depth 75-105 mm
 flushing plug
 wall sealing
 installation device



48 348 000

chrome

Spray face
 for SmartControl and head showers with multiple Bokoma sprays
 including spray face with / without GROHE Logo
 including disassembly-key



26 385 000


chrome

Rainshower SmartControl Compensation disc
 for Rainshower SmartControl systems
 26 250, 26 361, 26 379
 stackable

GROHE RAINSHOWER SMARTACTIVE SYSTEM

Ref. no.

Colour



26 648 000

chrome

Rainshower SmartActive 310

Shower system with Safety Mixer for wall mounting

horizontal swivable 450 mm shower arm

exposed Safety Mixer with Aquadimmer function

head shower Rainshower Mono 310

maximum flow rate (at 3 bar): 9.5 l/min

with ball joint

hand shower Rainshower SmartActive 130

maximum flow rate (at 3 bar): 8.5 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm

GROHE TurboStat compact cartridge

GROHE Water Saving - Less water, perfect flow

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE CoolTouch no risk of scalding

GROHE DreamSpray perfect spray pattern

GROHE SmartTip showering spray selection via push of a ring

GROHE Long-Life finish


GROHE FastFixation upper bracket adjustable

SpeedClean anti-lime system

minimum flow rate 7 l/min.

22 119 KF0
ditto, Professional exclusive

phantom black



26 652 000

chrome

Rainshower SmartActive 310

Shower system with Safety Mixer for wall mounting

horizontal swivable 450 mm shower arm

exposed Safety Mixer with Aquadimmer function

head shower Rainshower Mono 310 Cube

maximum flow rate (at 3 bar): 9.5 l/min

with ball joint

hand shower Rainshower SmartActive 130 Cube

maximum flow rate (at 3 bar): 8.5 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm

GROHE TurboStat compact cartridge

GROHE Water Saving - Less water, perfect flow

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE CoolTouch no risk of scalding

GROHE DreamSpray perfect spray pattern

GROHE SmartTip showering spray selection via push of a ring

GROHE Long-Life finish

GROHE FastFixation upper bracket adjustable

SpeedClean anti-lime system

minimum flow rate 7 l/min.

26 837 DC0
26 837 GL0
26 837 GN0
26 837 DAO
26 837 DL0
26 837 A00
26 837 AL0
ditto, Professional exclusive

supersteel

cool sunrise

brushed cool sunrise

warm sunset

brushed warm sunset


hard graphite

brushed hard graphite

GROHE RAINSHOWER SMARTACTIVE SYSTEM

Ref. no.

Colour



26 657 000 chrome

Rainshower SmartActive 310

Shower system with Bath Safety Mixer for wall mounting

horizontal swivable 450 mm shower arm

exposed Safety Mixer with Aquadimmer function

head shower Rainshower Mono 310

maximum flow rate (at 3 bar): 7.5 l/min

with ball joint

bath inlet

separate diverter for hand shower

hand shower Rainshower SmartActive 130

maximum flow rate (at 3 bar): 8.5 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm

GROHE TurboStat compact cartridge

GROHE Water Saving - Less water, perfect flow

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE CoolTouch no risk of scalding

GROHE DreamSpray perfect spray pattern

GROHE SmartTip showering spray selection via push of a ring


GROHE Long-Life finish

GROHE FastFixation upper bracket adjustable

SpeedClean anti-lime system

Inner WaterGuide for a longer life

minimum flow rate 7 l/min.



27 968 001 chrome

Rainshower SmartActive 310

Shower system with Safety Mixer for wall mounting

horizontal swivable 450 mm shower arm

exposed Safety Mixer with Aquadimmer function

head shower Rainshower Cosmopolitan 310

maximum flow rate (at 3 bar): 9.5 l/min

material: metal

with ball joint

hand shower Rainshower SmartActive 130

maximum flow rate (at 3 bar): 8.5 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm

GROHE TurboStat compact cartridge

GROHE Water Saving - Less water, perfect flow

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE CoolTouch no risk of scalding

GROHE DreamSpray perfect spray pattern

GROHE SmartTip showering spray selection via push of a ring

GROHE Long-Life finish


GROHE FastFixation upper bracket adjustable

SpeedClean anti-lime system

minimum flow rate 7 l/min.

GROHE RAINSHOWER SYSTEM

Ref. no. Colour

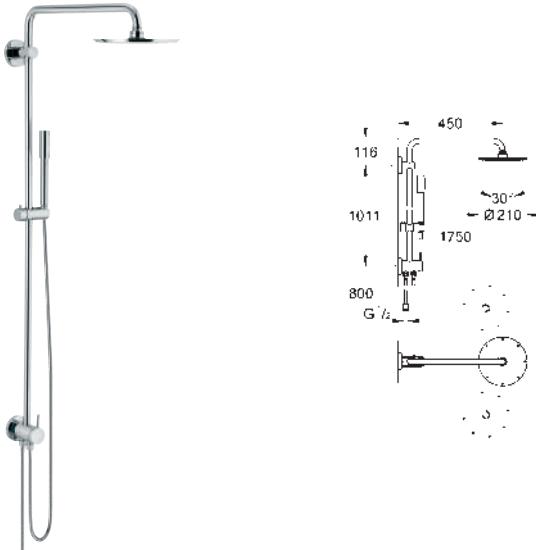

27 058 000 chrome
Rainshower System 210
Shower system with diverter
for wall mounting
horizontal swivable 450 mm shower arm
change between hand and head shower by diverter
Rainshower Cosmopolitan 210 metal head shower
with ball joint
rotation angle $\pm 15^\circ$
metal stick hand shower
adjustable in height with gliding element
metal shower hose 1750 mm
connection to water supply with 1/2"-thread of
the 800 mm shower hose to faucet / wall union
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heaters from 18 kW/h
minimum flow rate 7 l/min.

GROHE EUPHORIA SMARTCONTROL SYSTEM

Ref. no.

Colour

| | |
|------------|-----------------------|
| 26 507 000 | chrome |
| 26 507 LS0 | moon white |
| 26 507 DC0 | supersteel |
| 26 507 GL0 | cool sunrise |
| 26 507 GN0 | brushed cool sunrise |
| 26 507 DAO | warm sunset |
| 26 507 DLO | brushed warm sunset |
| 26 507 A00 | hard graphite |
| 26 507 AL0 | brushed hard graphite |

Euphoria SmartControl System 310 Duo
Shower system with Safety Mixer for wall mounting

horizontal 450 mm shower arm
upper bracket adjustable for minimal adaption to existing drilling holes
exposed SmartControl Safety Mixer

head shower Rainshower SmartActive 310

2 spray patterns:

GROHE PureRain, ActiveRain

maximum flow rate (at 3 bar): 20 l/min

hand shower Euphoria 110 Massage, spray plate white (27 221 001)

maximum flow rate (at 3 bar): 16 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE CoolTouch no risk of scalding

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartControl push for ON-OFF, turn for volume adjustment

integrated **GROHE EasyReach** shower tray

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

22 120 KF0 phantom black
ditto, Professional exclusive

| | |
|------------|-----------------------|
| 26 508 000 | chrome |
| 26 508 LS0 | moon white |
| 26 508 DC0 | supersteel |
| 26 508 GL0 | cool sunrise |
| 26 508 GN0 | brushed cool sunrise |
| 26 508 DAO | warm sunset |
| 26 508 DLO | brushed warm sunset |
| 26 508 A00 | hard graphite |
| 26 508 AL0 | brushed hard graphite |

Euphoria SmartControl System 310 Cube Duo

Shower system with Safety Mixer for wall mounting

horizontal 450 mm shower arm

upper bracket adjustable for minimal adaption to existing drilling holes
exposed SmartControl Safety Mixer

head shower Rainshower SmartActive 310 Cube

2 spray patterns:

GROHE PureRain, ActiveRain

maximum flow rate (at 3 bar): 20 l/min

hand shower Euphoria Cube (27 699)

maximum flow rate (at 3 bar): 16 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE DreamSpray perfect spray pattern

GROHE CoolTouch no risk of scalding

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE Long-Life finish

GROHE SafeStop at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartControl push for ON-OFF, turn for volume adjustment

integrated **GROHE EasyReach** shower tray



SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

suitable for instantaneous heaters from 18 kW/h


minimum flow rate 7 l/min.



GROHE EUPHORIA SMARTCONTROL SYSTEM

Ref. no.

Colour



26 608 000

chrome

Euphoria SmartControl System 260 Mono

Shower system with Bath Safety Mixer for wall mounting
horizontal swivable 450 mm shower arm

upper bracket adjustable for minimal adaption to existing drilling holes

exposed SmartControl Bath Safety Mixer

allows change between:

head shower Euphoria 260 (26 455)

3 spray patterns:

Rain, SmartRain, Jet

maximum flow rate (at 3 bar): 20 l/min

with ball joint

rotation angle $\pm 15^\circ$

bath inlet

hand shower Euphoria 110 Massage, spray plate white (27 221 001)

3 spray patterns:

Rain, SmartRain, Massage

maximum flow rate (at 3 bar): 16 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE CoolTouch no risk of scalding

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartControl push for ON-OFF, turn for volume adjustment

integrated **GROHE EasyReach** shower tray


SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.



26 509 000

chrome

Euphoria SmartControl System 260 Mono

Shower system with Safety Mixer for wall mounting
horizontal 450 mm shower arm

upper bracket adjustable for minimal adaption to existing drilling holes

exposed SmartControl Safety Mixer

head shower Euphoria 260 (26 455)

3 spray patterns: Rain, SmartRain, Jet

maximum flow rate (at 3 bar): 16 l/min

with ball joint

hand shower Euphoria 110 Massage, spray plate white (27 221 001)

maximum flow rate (at 3 bar): 15 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE CoolTouch no risk of scalding

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartControl push for ON-OFF, turn for volume adjustment

integrated **GROHE EasyReach** shower tray

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting


suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

GROHE EUPHORIA SMARTCONTROL SYSTEM

Ref. no.

Colour



26 510 000

chrome

Euphoria SmartControl System 260 Mono

Shower system with Bath Safety Mixer for wall mounting

horizontal swivable 450 mm shower arm

upper bracket adjustable for minimal adaption to existing drilling holes

exposed SmartControl Bath Safety Mixer

head shower Euphoria 260 (26 455)

3 spray patterns: Rain, SmartRain, Jet

maximum flow rate (at 3 bar): 20 l/min

with ball joint

bath inlet

hand shower Euphoria 110 Massage, spray plate white (27 221 001)

maximum flow rate (at 3 bar): 16 l/min

adjustable in height with gliding element

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE CoolTouch no risk of scalding

GROHE TurboStat compact cartridge

GROHE ProGrip with knurl structure

GROHE SafeStop at 38°C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartControl push for ON-OFF, turn for volume adjustment

integrated **GROHE EasyReach** shower tray

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.



14 079 XH0

chrome/frosted granite

SmartControl

Caps exposed

3 caps with 3 different symbols

fits Euphoria SmartControl shower systems

GROHE EUPHORIA SYSTEM

Ref. no. Colour




| | |
|---|---------------|
| 26 075 001 | chrome |
| Euphoria System 310 | |
| Shower system with safety mixer for wall mounting | |
| horizontal swivable 450 mm shower arm | |
| exposed Safety Mixer with Aquadimmer function | |
| allows change between: | |
| head shower Rainshower Mono 310 (26 561) | |
| spray pattern: | |
| GROHE PureRain | |
| maximum flow rate (at 3 bar): 13.5 l/min | |
| with ball joint | |
| rotation angle $\pm 15^\circ$ | |
| hand shower Euphoria 110 Massage (27 221 000) | |
| 3 spray patterns: | |
| Rain, Massage, SmartRain | |
| maximum flow rate (at 3 bar): 11.5 l/min | |
| adjustable in height with gliding element | |
| Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) | |
| GROHE TurboStat compact cartridge | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C included | |
| GROHE CoolTouch no risk of scalding | |
| GROHE MetalGrip ergonomically shaped metal handles | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE SprayDimmer (Stepless flow rate reduction) | |
| GROHE FastFixation upper bracket adjustable | |
| Inner WaterGuide for a longer life | |
| SpeedClean anti-lime system | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |
| optional upgrade: GROHE EasyReach tray (26 362) | |




| | |
|--|-------------------|
| 26 075 DC0 | supersteel |
| 26 075 GLO | |
| 26 075 GNO | |
| 26 075 DAO | |
| 26 075 DLO | |
| 26 075 A00 | |
| 26 075 ALO | |
| Euphoria System 310 | |
| Shower system with safety mixer for wall mounting | |
| horizontal swivable 450 mm shower arm | |
| exposed Safety Mixer with Aquadimmer function | |
| allows change between: | |
| head shower Rainshower Cosmopolitan 310 metal head shower (27 477) | |
| spray pattern: Rain | |
| maximum flow rate (at 3 bar): 13.5 l/min | |
| with ball joint | |
| rotation angle $\pm 15^\circ$ | |
| hand shower Euphoria 110 Massage (27 221 000) | |
| 3 spray patterns: | |
| Rain, Massage, SmartRain | |
| maximum flow rate (at 3 bar): 11.5 l/min | |
| adjustable in height with gliding element | |
| Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) | |
| GROHE TurboStat compact cartridge | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C included | |
| GROHE CoolTouch no risk of scalding | |
| GROHE MetalGrip ergonomically shaped metal handles | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE SprayDimmer (Stepless flow rate reduction) | |
| Inner WaterGuide for a longer life | |
| SpeedClean anti-lime system | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |
| optional upgrade: GROHE EasyReach tray (26 362) | |

GROHE EUPHORIA SYSTEM

Ref. no. Colour



26 723 000 chrome
Euphoria System 310
Shower system with safety mixer for wall mounting
 horizontal swivable 450 mm shower arm
 exposed Safety Mixer with Aquadimmer function
 head shower Rainshower Mono 310 (26 562)
GROHE PureRain
 maximum flow rate (at 3 bar): 8 l/min
 with ball joint
 hand shower Euphoria 110 Massage (27 239)
 3 spray patterns:
 Rain, Massage, SmartRain
 maximum flow rate (at 3 bar): 8 l/min
 adjustable in height with gliding element
 Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE TurboStat compact cartridge
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE CoolTouch no risk of scalding
GROHE MetalGrip ergonomically shaped metal handles
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Water Saving - Less water, perfect flow
GROHE FastFixation upper bracket adjustable
Inner WaterGuide for a longer life
SpeedClean anti-lime system
TwistStop to prevent hose from twisting
 suitable for instantaneous heaters from 18 kW/h
 minimum flow rate 7 l/min.
 optional upgrade: **GROHE EasyReach tray (26 362)**



27 615 002 chrome
Euphoria System 260
Shower system with safety mixer for wall mounting
 horizontal swivable 450 mm shower arm
 exposed Safety Mixer with Aquadimmer function
 head shower Euphoria 260 (26 457)
 3 spray patterns:
 Rain, SmartRain, Jet
 maximum flow rate (at 3 bar): 7.5 l/min
 with ball joint
 hand shower Euphoria 110 Massage (27 239)
 maximum flow rate (at 3 bar): 8.5 l/min
 adjustable in height with gliding element
 Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE TurboStat compact cartridge
GROHE SafeStop safety button at 38C
GROHE SafeStop Plus optional temperature limiter at 43°C included
GROHE CoolTouch no risk of scalding
GROHE ProGrip with knurl structure
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE FastFixation upper bracket adjustable
Inner WaterGuide for a longer life
SpeedClean anti-lime system
TwistStop to prevent hose from twisting
 suitable for instantaneous heaters from 18 kW/h
 minimum flow rate 7 l/min.
 optional upgrade: **GROHE EasyReach tray (26 362)**

GROHE EUPHORIA SYSTEM




Ref. no. Colour

| | |
|--|--------|
| 27 475 002 | chrome |
| Euphoria System 260 | |
| Shower system with Bath Safety Mixer for wall mounting | |
| horizontal swivable 450 mm shower arm | |
| exposed Safety Mixer with Aquadimmer function | |
| head shower Euphoria 260 (26 457) | |
| 3 spray patterns: | |
| Rain, SmartRain, Jet | |
| maximum flow rate (at 3 bar): 18 l/min | |
| with ball joint | |
| bath inlet | |
| separate diverter for hand shower | |
| hand shower Euphoria 110 Massage (27 239) | |
| maximum flow rate (at 3 bar): 8.5 l/min | |
| adjustable in height with gliding element | |
| Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) | |
| GROHE TurboStat compact cartridge | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C included | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE SprayDimmer (Stepless flow rate reduction) | |
| GROHE FastFixation upper bracket adjustable | |
| Inner WaterGuide for a longer life | |
| SpeedClean anti-lime system | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |



| | |
|--|--------|
| 27 473 002 | chrome |
| Euphoria System 260 | |
| Shower system with single lever mixer for wall mounting | |
| horizontal swivable 450 mm shower arm | |
| exposed single-lever shower mixer with diverter | |
| head shower Euphoria 260 (26 457) | |
| 3 spray patterns: | |
| Rain, SmartRain, Jet | |
| maximum flow rate (at 3 bar): 7.5 l/min | |
| with ball joint | |
| hand shower Euphoria 110 Massage (27 239) | |
| maximum flow rate (at 3 bar): 8.5 l/min | |
| adjustable in height with gliding element | |
| Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) | |
| GROHE SilkMove 46 mm ceramic cartridge | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SprayDimmer (Stepless flow rate reduction) | |
| GROHE FastFixation upper bracket adjustable | |
| Inner WaterGuide for a longer life | |
| SpeedClean anti-lime system | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |



| | |
|--|-------|
| 26 362 LN1 | white |
| GROHE EasyReach tray | |
| for Euphoria and Tempesta shower systems with thermostat | |
| centre distance 150 mm | |

GROHE EUPHORIA SYSTEM

Ref. no. Colour




| | |
|---|--------|
| 26 087 000 | chrome |
| Euphoria Cube System 230 | |
| Shower system with safety mixer for wall mounting | |
| shower arm, projection 400 mm | |
| exposed Safety Mixer with Aquadimmer function | |
| Rainshower head shower (27 479 000) | |
| spray pattern: Rain | |
| maximum flow rate (at 3 bar): 13 l/min | |
| with ball joint | |
| hand shower Euphoria Cube (27 699) | |
| maximum flow rate (at 3 bar): 9 l/min | |
| adjustable in height with gliding element | |
| Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) | |
| GROHE TurboStat compact cartridge | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C included | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |



| | |
|--|--------|
| 27 421 002 | chrome |
| Euphoria System 260 | |
| Shower system with diverter for wall mounting | |
| horizontal swivable 450 mm shower arm | |
| change between hand and head shower by diverter | |
| head shower Euphoria 260 (26 457) | |
| 3 spray patterns: Rain, SmartRain, Jet | |
| maximum flow rate (at 3 bar): 7.5 l/min | |
| with ball joint | |
| hand shower Euphoria 110 Massage (27 239) | |
| maximum flow rate (at 3 bar): 8.5 l/min | |
| adjustable in height with gliding element | |
| Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) | |
| Silverflex shower hose 800 mm | |
| connection to water supply with 1/2"-thread of the 800 mm shower hose to faucet / wall union | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE SprayDimmer (Stepless flow rate reduction) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide for a longer life | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |

GROHE TEMPESTA SYSTEM 250



Ref. no.

Colour

26 670 001

chrome

Tempesta System 250

Shower system with Safety Mixer for wall mounting
consisting of:

horizontal swivable 390 mm shower arm
exposed Safety Mixer with Aquadimmer function
allows change between:
head shower Tempesta 250 (26 666)

spray pattern:

Rain

head shower with white rear cover
with ball joint
rotation angle $\pm 10^\circ$

hand shower Tempesta 110 (27 597)

2 spray patterns:

Rain, Jet

adjustable in height with gliding element

Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 7.3 l/min

GROHE Water Saving - Less water, perfect flow

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages

caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.


optional upgrade: **GROHE EasyReach tray (26 362)**

professional edition

26 670 2431

matte black

ditto, head shower with black rear cover



26 811 001

chrome

Tempesta System 210

Shower system with Safety Mixer for wall mounting
consisting of:

horizontal swivable 390 mm shower arm
exposed Safety Mixer with Aquadimmer function
allows change between:
head shower Tempesta 210 (26 410)

spray plate white

spray pattern:

Rain

with ball joint

rotation angle $\pm 15^\circ$

hand shower Tempesta 110 (27 923)

spray pattern:

Rain

adjustable in height with gliding element

Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 7.9 l/min

GROHE Water Saving - Less water, perfect flow

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages

caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting


suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

optional upgrade: **GROHE EasyReach tray (26 362)**


GROHE TEMPESTA SYSTEM 250

Ref. no. Colour



| | |
|--|--------|
| 26 672 001 | chrome |
| Tempesta System 250 | |
| Shower system with Bath Safety Mixer for wall mounting | |
| consisting of: | |
| horizontal swivable 390 mm shower arm | |
| exposed Safety Mixer with Aquadimmer function | |
| allows change between: | |
| head shower Tempesta 250 (26 666) | |
| spray pattern: | |
| Rain | |
| head shower with white rear cover | |
| with ball joint | |
| rotation angle $\pm 10^\circ$ | |
| bath inlet | |
| separate diverter for hand shower | |
| hand shower Tempesta 110 (27 597) | |
| 2 spray patterns: | |
| Rain, Jet | |
| adjustable in height with gliding element | |
| Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410) | |
| maximum flow rate (at 3 bar): 20 l/min | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE TurboStat compact cartridge | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C included | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| Inner WaterGuide for a longer life | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |
| professional edition | |


26 672 2431 matte black
ditto, head shower with black rear cover



| | |
|--|--------|
| 26 978 001 | chrome |
| Tempesta System 250 | |
| Shower system with Bath Safety Mixer for wall mounting | |
| consisting of: | |
| horizontal swivable 390 mm shower arm | |
| exposed Safety Mixer with Aquadimmer function | |
| allows change between: | |
| head shower Tempesta 250 (26 666) | |
| spray pattern: | |
| Rain | |
| head shower with white rear cover | |
| with ball joint | |
| rotation angle $\pm 10^\circ$ | |
| bath inlet | |
| separate diverter for hand shower | |
| hand shower Tempesta 110 (27 597) | |
| 2 spray patterns: | |
| Rain, Jet | |
| adjustable in height with gliding element | |
| Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410) | |
| maximum flow rate (at 3 bar): 7.3 l/min | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE TurboStat compact cartridge | |
| GROHE SafeStop safety button at 38C | |
| GROHE SafeStop Plus optional temperature limiter at 43°C included | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| Inner WaterGuide for a longer life | |
| TwistStop to prevent hose from twisting | |
| suitable for instantaneous heaters from 18 kW/h | |
| minimum flow rate 7 l/min. | |
| professional edition | |

GROHE TEMPESTA SYSTEM 250

Ref. no. Colour



26 673 001

chrome

Tempesta System 250

Shower system with single lever mixer for wall mounting
consisting of:

horizontal swivable 390 mm shower arm
exposed single-lever shower mixer with diverter
allows change between:
head shower Tempesta 250 (26 666)

spray pattern:

Rain
head shower with white rear cover
with ball joint
rotation angle $\pm 10^\circ$
hand shower Tempesta 110 (27 597)

2 spray patterns:

Rain, Jet
adjustable in height with gliding element
Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 7.3 l/min
GROHE Water Saving - Less water, perfect flow
GROHE SilkMove 46 mm ceramic cartridge

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
GROHE DreamSpray perfect spray pattern
ShockProof silicone ring prevents damages caused by shower falling

GROHE Long-Life finish


SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting
suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

minimum pressure 1.0 bar
professional edition



26 244 002

chrome

Tempesta System 200

Shower system with single lever mixer for wall mounting
consisting of:

horizontal swivable 450 mm shower arm
exposed single-lever shower mixer with diverter
allows change between:
head shower Tempesta Cosmopolitan 200 (27 541)

spray pattern:

Rain
with ball joint
rotation angle $\pm 15^\circ$
hand shower Tempesta 110 (27 597)

2 spray patterns:

Rain, Jet
adjustable in height with gliding element
Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 13.5 l/min
GROHE SilkMove 46 mm ceramic cartridge

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

minimum pressure 1.0 bar

GROHE TEMPESTA SYSTEM 250

Ref. no.

Colour



26 675 001

chrome

Tempesta System 250

Shower system with diverter for wall mounting

consisting of:

horizontal 390 mm shower arm, adjustable before installation
change by diverter between hand shower,
head shower or head shower Eco setting
head shower Tempesta 250 (26 666)

2 spray patterns (via diverter):

Rain, SmartRain
head shower with white rear cover
with ball joint
rotation angle $\pm 10^\circ$

hand shower Tempesta 110 (28 419)

3 spray patterns:

Rain, Jet, Massage
adjustable in height with gliding element
distance between diverter and upper bracket: 920 mm
shower hose Relexaflex 1500 mm (28 151)
Relexaflex shower hose 500 mm (22 115)
flexible installation: connection to faucet / wall union for
water supply with 1/2" thread of the 500 mm shower hose
maximum flow rate (at 3 bar): 7.9 l/min

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages
caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

minimum pressure 1.0 bar

professional edition



26 979 001

chrome

Tempesta System 250

Shower system with diverter for wall mounting

consisting of:

horizontal 390 mm shower arm, adjustable before installation
change by diverter between hand shower,
head shower or head shower Eco setting
head shower Tempesta 250 (26 666)

2 spray patterns (via diverter):

Rain, SmartRain
head shower with white rear cover
with ball joint
rotation angle $\pm 10^\circ$

hand shower Tempesta 110 (26 912)

2 spray patterns:

Rain, Jet
adjustable in height with gliding element
distance between diverter and upper bracket: 920 mm
shower hose Relexaflex 1500 mm (28 151)
Relexaflex shower hose 500 mm (22 115)
flexible installation: connection to faucet / wall union for
water supply with 1/2" thread of the 500 mm shower hose
maximum flow rate (at 3 bar): 7.5 l/min

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages
caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

minimum pressure 1.0 bar

professional edition


26 979 2431

matte black

ditto, head shower with black rear cover


GROHE TEMPESTA SYSTEM 250

Ref. no. Colour



26 980 001 chrome
Tempesta System 250
Shower system with diverter for wall mounting
 consisting of:
 horizontal 390 mm shower arm, adjustable before installation
 change by diverter between hand shower,
 head shower or head shower Eco setting
 head shower Tempesta 250 (26 666)
 2 spray patterns (via diverter):
 Rain, SmartRain
 head shower with white rear cover
 with ball joint
 rotation angle $\pm 10^\circ$
 hand shower Tempesta 110 (28 419)
 3 spray patterns:
 Rain, Jet, Massage
 adjustable in height with gliding element
 distance between diverter and upper bracket: 620 mm
 shower hose Relexaflex 1500 mm (28 151)
 shower hose Relexaflex 1250 mm (28 150)
 flexible installation: connection to faucet / wall union for water supply with 1/2" thread of the 1250 mm shower hose
 maximum flow rate (at 3 bar): 7.9 l/min
GROHE Water Saving - Less water, perfect flow
GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
GROHE DreamSpray perfect spray pattern
ShockProof silicone ring prevents damages caused by shower falling
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
 suitable for instantaneous heaters from 18 kW/h
 minimum flow rate 7 l/min.
 minimum pressure 1.0 bar
 professional edition

26 980 2431 matte black
 ditto, head shower with black rear cover




26 452 002 chrome
Tempesta System 200
Shower system with diverter for wall mounting
 consisting of:
 horizontal 390 mm shower arm, adjustable before installation
 change by diverter between hand shower,
 head shower or head shower Eco setting
 head shower Tempesta Cosmopolitan 200 (27 541)
 2 spray patterns (via diverter):
 Rain, SmartRain
 with ball joint
 rotation angle $\pm 15^\circ$
 hand shower Tempesta 110 (28 261)
 3 spray patterns:
 Rain, Jet, Massage
 adjustable in height with gliding element
 distance between diverter and upper bracket: 920 mm
 shower hose Relexaflex 1500 mm (28 151)
 Relexaflex shower hose 500 mm (22 115)
 flexible installation: connection to faucet / wall union for water supply with 1/2" thread of the 500 mm shower hose
 maximum flow rate (at 3 bar): 9.5 l/min
GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
GROHE DreamSpray perfect spray pattern
ShockProof silicone ring prevents damages caused by shower falling
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
 minimum flow rate 7 l/min.

GROHE TEMPESTA SYSTEM 250

Ref. no.

Colour



27 389 003

chrome

Tempesta System 200

Shower system with diverter for wall mounting

consisting of:

horizontal 390 mm shower arm, adjustable before installation
change by diverter between hand shower,
head shower or head shower Eco setting
head shower Tempesta Cosmopolitan 200 (27 541)
spray pattern:

Rain
with ball joint
rotation angle $\pm 15^\circ$
hand shower Tempesta 110 (28 261)

3 spray patterns:
Rain, Jet, Massage
adjustable in height with gliding element
distance between diverter and upper bracket: 620 mm
shower hose Relexaflex 1500 mm (28 151)
shower hose Relexaflex 1250 mm (28 150)
flexible installation: connection to faucet / wall union for water supply with 1/2" thread of the 1250 mm shower hose
maximum flow rate (at 3 bar): 9.5 l/min

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern


ShockProof silicone ring prevents damages caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

minimum flow rate 7 l/min.



26 981 001

chrome

Tempesta System 200

Shower system with diverter for wall mounting

consisting of:

horizontal 390 mm shower arm, adjustable before installation
change by diverter between hand shower,
head shower or head shower Eco setting

2 spray patterns (via diverter):

Rain, SmartRain
head shower Tempesta Cosmopolitan 200 (27 541)
with ball joint
rotation angle $\pm 15^\circ$
hand shower Tempesta 110 (26 914)

3 spray patterns:
Rain, Jet, Massage
adjustable in height with gliding element
distance between diverter and upper bracket: 620 mm
shower hose Relexaflex 1500 mm (28 151)
shower hose Relexaflex 1250 mm (28 150)
maximum flow rate (at 3 bar): 6.5 l/min

flexible installation: connection to faucet / wall union for water supply with 1/2" thread of the 1250 mm shower hose

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages caused by shower falling

GROHE Long-Life finish


SpeedClean anti-lime system

Inner WaterGuide for a longer life

GROHE TEMPESTA SYSTEM 250

Ref. no.

Colour



26 689 001

chrome

Tempesta System 250 Cube

Shower system with Safety Mixer for wall mounting

horizontal swivable 390 mm shower arm

exposed Safety Mixer with Aquadimmer function

head shower Tempesta 250 Cube (26 685)

spray pattern: Rain

head shower with white rear cover

with ball joint

hand shower Tempesta Cube 110 (27 571)

adjustable in height with gliding element

Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 7.3 l/min

GROHE Water Saving - Less water, perfect flow

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages

caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



minimum flow rate 7 l/min.

optional upgrade: **GROHE EasyReach tray** (26 362)

26 689 2431

matte black

ditto, head shower with black rear cover

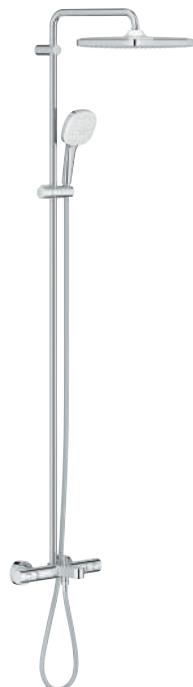

26 691 001

chrome

Tempesta System 250 Cube

Shower system with Bath Safety Mixer for wall mounting

horizontal swivable 390 mm shower arm

exposed Safety Mixer with Aquadimmer function

head shower Tempesta 250 Cube (26 685)

spray pattern: Rain

head shower with white rear cover

with ball joint

bath inlet

separate diverter for hand shower

hand shower Tempesta Cube 110 (27 571)

adjustable in height with gliding element

Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 20 l/min

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages

caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

minimum flow rate 7 l/min.

26 691 2431


matte black

ditto, head shower with black rear cover

GROHE TEMPESTA SYSTEM 250

Ref. no.

Colour



26 975 001

chrome

Tempesta System 250 Cube

Shower system with Bath Safety Mixer for wall mounting

horizontal swivable 390 mm shower arm

exposed Safety Mixer with Aquadimmer function

head shower Tempesta 250 Cube (26 685)

spray pattern: Rain

head shower with white rear cover

with ball joint

bath inlet

separate diverter for hand shower

hand shower Tempesta Cube 110 (27 571)

adjustable in height with gliding element

Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 8 l/min

GROHE Water Saving - Less water, perfect flow

GROHE TurboStat compact cartridge

GROHE SafeStop safety button at 38C

GROHE SafeStop Plus optional temperature limiter at 43°C included

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages

caused by shower falling


GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

minimum flow rate 7 l/min.



26 692 001

chrome

Tempesta System 250 Cube

Shower system with single lever mixer for wall mounting

horizontal swivable 390 mm shower arm (14 047)

exposed single-lever shower mixer with diverter

head shower Tempesta 250 Cube (26 685)

spray pattern: Rain

head shower with white rear cover

with ball joint

hand shower Tempesta Cube 110 (27 571)

adjustable in height with gliding element

Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 7.3 l/min

GROHE Water Saving - Less water, perfect flow

GROHE SilkMove 46 mm ceramic cartridge

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages

caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting


suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.

GROHE TEMPESTA SYSTEM 250

Ref. no.

Colour

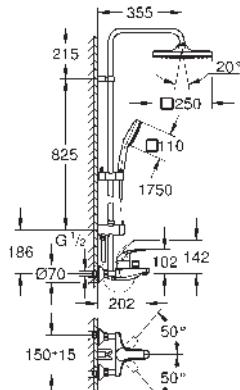

26 693 001

chrome

Tempesta System 250 Cube

Shower system with single lever bath mixer for wall mounting with short shower rail for installation in showers

horizontal 355 mm shower arm

exposed single-lever bath mixer with diverter handle

head shower Tempesta 250 Cube (26 685)

spray pattern: Rain

head shower with white rear cover

with ball joint

bath inlet

separate diverter for hand shower

hand shower Tempesta Cube 110 (27 574)

3 spray patterns:

Rain, Jet, Massage

adjustable in height with gliding element

Rotaflex TwistStop shower hose 1750 mm 1/2" x 1/2" (28 410)

maximum flow rate (at 3 bar): 7.3 l/min

GROHE Water Saving - Less water, perfect flow

GROHE SilkMove 46 mm ceramic cartridge

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages caused by shower falling

GROHE Long-Life finish


SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

suitable for instantaneous heaters from 18 kW/h

minimum flow rate 7 l/min.



26 694 001

chrome

Tempesta System 250 Cube

Shower system with diverter for wall mounting

diverter

horizontal 390 mm shower arm, adjustable before installation

change by diverter between hand shower,

head shower or head shower Eco setting

head shower Tempesta 250 Cube (26 685)

2 spray patterns (via diverter):

Rain, SmartRain

head shower with white rear cover

with ball joint

hand shower Tempesta Cube 110 (27 574)

3 spray patterns:

Rain, Jet, Massage

adjustable in height with gliding element

distance between diverter and upper bracket: 920 mm

shower hose Relexaflex 1500 mm (28 151)

Relexaflex shower hose 500 mm (22 115)

flexible installation: connection to faucet / wall union for

water supply with 1/2" thread of the 500 mm shower hose

maximum flow rate (at 3 bar): 7.4 l/min

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system


Inner WaterGuide for a longer life

minimum flow rate 7 l/min.

GROHE TEMPESTA SYSTEM 250

Ref. no.

Colour



26 976 001 chrome

Tempesta System 250 Cube

Shower system with diverter for wall mounting

consisting of:

horizontal 390 mm shower arm, adjustable before installation
change by diverter between hand shower,
head shower or head shower Eco setting
head shower Tempesta 250 Cube (26 685)
2 spray patterns (via diverter):

Rain, SmartRain
head shower with white rear cover
with ball joint

rotation angle $\pm 10^\circ$
hand shower Tempesta Cube 110 (26 902)
2 spray patterns:

Rain, Jet
adjustable in height with gliding element
distance between diverter and upper bracket: 920 mm
shower hose Relexaflex 1500 mm (28 151)
shower hose Relexaflex 1250 mm (28 150)
flexible installation: connection to faucet / wall union for
water supply with 1/2" thread of the 500 mm shower hose
maximum flow rate (at 3 bar): 7.5 l/min

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

ShockProof silicone ring prevents damages
caused by shower falling


SpeedClean anti-lime system

Inner WaterGuide for a longer life
suitable for instantaneous heaters from 18 kW/h
minimum flow rate 7 l/min.

minimum pressure 1.0 bar

professional edition

26 976 2431 matte black
ditto, head shower with black rear cover



26 977 001 chrome

Tempesta System 250 Cube

Shower system with diverter for wall mounting

consisting of:

horizontal 390 mm shower arm, adjustable before installation
change by diverter between hand shower,
head shower or head shower Eco setting
head shower Tempesta 250 Cube (26 685)
2 spray patterns (via diverter):

Rain, SmartRain
head shower with white rear cover
with ball joint

rotation angle $\pm 10^\circ$
hand shower Tempesta Cube 110 (27 574)
3 spray patterns:

Rain, Jet, Massage
adjustable in height with gliding element
distance between diverter and upper bracket: 620 mm
shower hose Relexaflex 1500 mm (28 151)
shower hose Relexaflex 1250 mm (28 150)
flexible installation: connection to faucet / wall union for water
supply with 1/2" thread of the 1250 mm shower hose
maximum flow rate (at 3 bar): 7.9 l/min

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

ShockProof silicone ring prevents damages

caused by shower falling

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life
suitable for instantaneous heaters from 18 kW/h
minimum flow rate 7 l/min.

minimum pressure 1.0 bar


professional edition

26 977 2431 matte black
ditto, head shower with black rear cover

GROHE SHOWER SYSTEM ACCESSORIES

Ref. no.

Colour




48 349 000 chrome

Rainshower SmartControl Shower system pipe for retrofitting
metal
shower pipe for retrofitting - 15 cm shorter than original shower system pipe
suitable for all Rainshower SmartControl shower systems
GROHE Long-Life finish




48 350 000 chrome

Rainshower SmartControl Shower system pipe for retrofitting
metal
shower pipe for retrofitting 15 cm longer than original shower system pipe
suitable for all Rainshower SmartControl shower systems
GROHE Long-Life finish
Note: longer pipe cannot be installed afterwards or rather a mounted system cannot be modified to a longer pipe




48 514 000 chrome

Shower system pipe for retrofitting as of 2019
for shower systems with plastic inner water guide
shower pipe for retrofitting 15 cm longer than original shower system pipe
for bath/shower systems: 30 cm shorter than original pipe
suitable for all Rainshower, Euphoria and Tempesta shower systems except SmartControl shower systems
not suitable for shower systems with side sprays
not suitable for Flex shower systems with diverter
GROHE Long-Life finish



48 515 000 chrome

Shower system pipe for retrofitting as of 2019
for shower systems with plastic inner water guide
shower pipe for retrofitting - 15 cm shorter than original shower system pipe
for bath/shower systems: 60 cm shorter than original pipe
suitable for all Rainshower, Euphoria and Tempesta shower systems except SmartControl shower systems
not suitable for shower systems with side sprays
not suitable for Flex shower systems with diverter
GROHE Long-Life finish




48 497 000 chrome

Shower system pipe for retrofitting
material: metal
15 cm longer than original shower system pipe
suitable for Euphoria SmartControl shower systems 26 507 and 26 508
GROHE Long-Life finish
not suitable for all other shower systems

GROHE SHOWER SYSTEM ACCESSORIES

Ref. no.


Colour

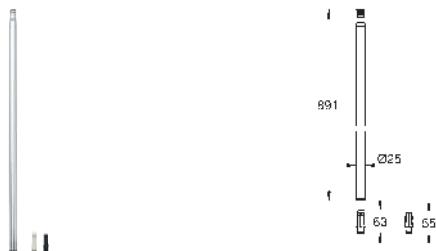


| | |
|---|--------|
| 48 498 000 | chrome |
| Shower system pipe for retrofitting | |
| material: metal | |
| shower pipe for retrofitting - 15 cm shorter than original shower system pipe | |
| suitable for Euphoria SmartControl shower systems 26 507, 26 508 and 26 509 | |
| GROHE Long-Life finish | |
| not suitable for all other shower systems | |




| | |
|--|--------|
| 48 499 000 | chrome |
| Shower system pipe for retrofitting | |
| material: metal | |
| shower pipe for retrofitting | |
| 15 cm longer than original shower system pipe | |
| suitable for Euphoria SmartControl shower systems 26 509 | |
| GROHE Long-Life finish | |
| not suitable for all other shower systems | |

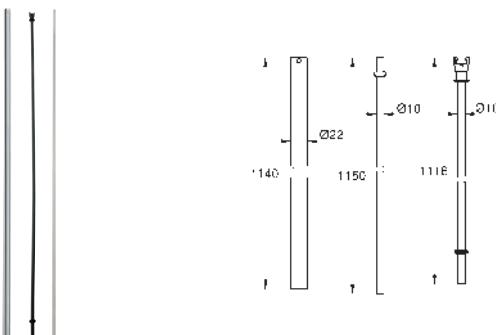

| | |
|--|--------|
| 48 053 000 | chrome |
| Shower system pipe for retrofitting | |
| for shower systems with metal or plastic inner water guide | |
| shower pipe for retrofitting | |
| 15 cm longer than original shower system pipe | |
| for bath/shower systems: 30 cm shorter than original pipe | |
| suitable for all Rainshower, Euphoria and Tempesta shower systems as of 2014 | |
| except SmartControl shower systems | |
| not suitable for shower systems with side sprays | |
| not suitable for Flex shower systems with diverter | |
| GROHE Long-Life finish | |

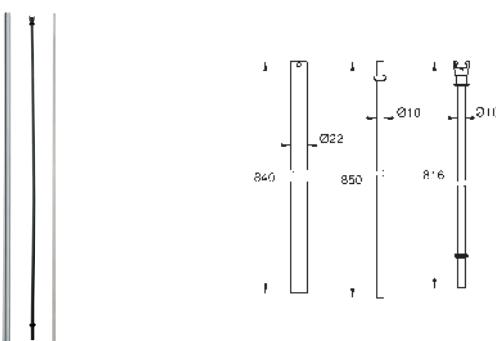

| | |
|---|--------|
| 48 054 000 | chrome |
| Shower system pipe for retrofitting | |
| for shower systems with metal or plastic inner water guide | |
| shower pipe for retrofitting - 15 cm shorter than original shower system pipe | |
| for bath/shower systems: 60 cm shorter than original pipe | |
| suitable for all Rainshower, Euphoria and Tempesta shower systems as of 2014 | |
| except SmartControl shower systems | |
| not suitable for shower systems with side sprays | |
| not suitable for Flex shower systems with diverter | |
| GROHE Long-Life finish | |



| | |
|--|--------|
| 14 047 000 | chrome |
| Rainshower | |
| Shower arm for shower systems | |
| as of 2017 | |
| material: metal | |
| projection 340 mm | |
| distance from wall 390 mm | |
| connection thread 1/2" | |
| GROHE Long-Life finish | |
| suitable for all GROHE shower systems except SmartControl | |
| suitable for GROHE shower systems with short nippel, see TPI | |


GROHE SHOWER SYSTEM ACCESSORIES

Ref. no.


Colour




| | |
|--|------------------------|
| 14 079 XH0 | chrome/frosted granite |
| SmartControl Caps exposed 3 caps with 3 different symbols fits Euphoria SmartControl shower systems | |




| | |
|--|-------|
| 26 362 LN1 | white |
| GROHE EasyReach tray for Euphoria and Tempesta shower systems with thermostat centre distance 150 mm | |




| | |
|---|--------|
| 27 180 000 | chrome |
| Rainshower Compensation disc for Rainshower systems 27 174, 27 175, 27 032, 27 058, 27 030, 27 038, 27 089, 27 031 GROHE Long-Life finish stackable | |



| | |
|--|--------|
| 26 385 000 | chrome |
| Rainshower SmartControl Compensation disc for Rainshower SmartControl systems 26 250, 26 361, 26 379 stackable | |



| | |
|--|--------|
| 27 933 000 | chrome |
| Euphoria Cube Compensation disc for Euphoria Cube shower systems (Cube brackets) GROHE Long-Life finish not stackable | |



| | |
|---|--------|
| 26 496 000 | chrome |
| Tempesta Compensation disc for Tempesta Flex Shower Systems GROHE Long-Life finish stackable | |


GROHE SHOWER SYSTEM ACCESSORIES

Ref. no.


Colour



26 030 000 chrome
GROHE Retro-fit Compensation disc
for GROHE retrofit shower systems
GROHE Long-Life finish
not stackable




27 921 000 chrome
Retrofit 6" height extension
GROHE Long-Life finish



26 464 000 chrome
Retrofit System
Retrofit 6" height extension
GROHE Long-Life finish

GROHE HEAD SHOWER SETS


Ref. no. Colour



| | |
|----------------------------------|--------|
| 26 254 000 | chrome |
| Rainshower Duo 360 | |
| Head shower set 450 mm, 2 sprays | |


head shower Rainshower Duo 360, spray plate chrome
 2 spray patterns: GROHE PureRain and Trio Massage
 maximum flow rate (at 3 bar): 40 l/min
 horizontal 450 mm shower arm
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
 requires rough-in set 26 264 – to be ordered separately

| | |
|---|------------|
| 26 254 LS0 | moon white |
| ditto, head shower with white spray plate | |



| | |
|---|--|
| 26 264 001 | |
| Rainshower 360 | |
| Rough-in box for head shower set 26 254 | |

inlets and outlets 1/2"
 fixing points for back wall
 leakproof housing
 removable protection cover with installation information




| | |
|------------|-----------------------|
| 26 475 000 | chrome |
| 26 475 DC0 | supersteel |
| 26 475 GL0 | cool sunrise |
| 26 475 GN0 | brushed cool sunrise |
| 26 475 DAO | warm sunset |
| 26 475 DL0 | brushed warm sunset |
| 26 475 A00 | hard graphite |
| 26 475 AL0 | brushed hard graphite |

Rainshower SmartActive 310

Head shower set 430 mm, 2 sprays
 head shower Rainshower SmartActive 310
 2 spray patterns: GROHE PureRain, ActiveRain
 horizontal 430 mm shower arm
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
 requires rough-in set 26 483 or 26 484 - to be ordered separately

| | |
|-------------------------------|---------------|
| 22 123 KF0 | phantom black |
| ditto, Professional exclusive | |

| | |
|---|------------|
| 26 475 LS0 | moon white |
| ditto, head shower with white spray plate | |



| | |
|------------|-----------------------|
| 26 477 000 | chrome |
| 26 477 DC0 | supersteel |
| 26 477 GL0 | cool sunrise |
| 26 477 GN0 | brushed cool sunrise |
| 26 477 DAO | warm sunset |
| 26 477 DL0 | brushed warm sunset |
| 26 477 A00 | hard graphite |
| 26 477 AL0 | brushed hard graphite |






Rainshower SmartActive 310

Head shower set ceiling 142 mm, 2 sprays
 head shower Rainshower SmartActive 310
 2 spray patterns: GROHE PureRain, ActiveRain
 142 mm ceiling shower arm
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
 requires rough-in set 26 483 or 26 484 - to be ordered separately

| | |
|-------------------------------|---------------|
| 22 124 KF0 | phantom black |
| ditto, Professional exclusive | |


| | |
|---|------------|
| 26 477 LS0 | moon white |
| ditto, head shower with white spray plate | |

GROHE HEAD SHOWER SETS

| | Ref. no. | Colour |
|---|--|--|
|  | 26 479 000 26 479 DCO 26 479 GLO 26 479 GNO 26 479 DAO 26 479 DLO 26 479 A00 26 479 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Rainshower SmartActive 310 Cube Head shower set 430 mm, 2 sprays head shower Rainshower SmartActive 310 Cube 2 spray patterns: GROHE PureRain, ActiveRain horizontal 430 mm shower arm GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life requires rough-in set 26 483 or 26 484 - to be ordered separately | |
|  | 26 479 LS0 ditto, head shower with white spray plate | moon white |
|  | 26 481 000 26 481 DCO 26 481 GLO 26 481 GNO 26 481 DAO 26 481 DLO 26 481 A00 26 481 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Rainshower SmartActive 310 Cube Head shower set ceiling 142 mm, 2 sprays head shower Rainshower SmartActive 310 Cube 2 spray patterns: GROHE PureRain, ActiveRain 142 mm ceiling shower arm GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life requires rough-in set 26 483 or 26 484 - to be ordered separately | |
|  | 26 481 LS0 ditto, head shower with white spray plate | moon white |
|  | 26 484 000 Rainshower Universal rough-in box, 1/2" 2 inlets, 1/2" installation depth 75-105 mm connection unit in DR brass stable build-in box and protective cover leakproof housing GROHE Water Saving 9.5 l/min flow limiter per each water way | |
|  | 26 483 000 ditto, with non-restricted flow | |
|  | 26 558 000 26 558 DCO 26 558 GLO 26 558 GNO 26 558 DAO 26 558 DLO 26 558 A00 26 558 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | Rainshower Mono 310 Head shower set 422 mm, 1 spray head shower Rainshower 310, spray plate chrome (26 562) 1 spray pattern: GROHE PureRain maximum flow rate (at 3 bar): 7.5 l/min shower arm Rainshower 422 mm (26 146) GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life | |
|  | 22 121 KF0 ditto, Professional exclusive | phantom black |

GROHE HEAD SHOWER SETS

Ref. no. Colour




| | |
|------------|-----------------------|
| 26 560 000 | chrome |
| 26 560 DCO | supersteel |
| 26 560 GLO | cool sunrise |
| 26 560 GN0 | brushed cool sunrise |
| 26 560 DAO | warm sunset |
| 26 560 DL0 | brushed warm sunset |
| 26 560 A00 | hard graphite |
| 26 560 AL0 | brushed hard graphite |

Rainshower Mono 310

Head shower set ceiling 142 mm, 1 spray
head shower Rainshower 310, spray plate chrome (26 562)
1 spray pattern: GROHE PureRain
maximum flow rate (at 3 bar): 7.5 l/min
Rainshower shower arm ceiling 142 mm (28 724)
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life


22 122 KF0 phantom black
ditto, Professional exclusive



| | |
|------------|-----------------------|
| 26 564 000 | chrome |
| 26 564 DCO | supersteel |
| 26 564 GLO | cool sunrise |
| 26 564 GN0 | brushed cool sunrise |
| 26 564 DAO | warm sunset |
| 26 564 DL0 | brushed warm sunset |
| 26 564 A00 | hard graphite |
| 26 564 AL0 | brushed hard graphite |

Rainshower Mono 310 Cube

Head shower set 422 mm, 1 spray
head shower Rainshower 310
1 spray pattern: GROHE PureRain
maximum flow rate (at 3 bar): 7.5 l/min
Rainshower shower arm 422 mm (26 145)
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life




| | |
|------------|-----------------------|
| 26 566 000 | chrome |
| 26 566 DCO | supersteel |
| 26 566 GLO | cool sunrise |
| 26 566 GN0 | brushed cool sunrise |
| 26 566 DAO | warm sunset |
| 26 566 DL0 | brushed warm sunset |
| 26 566 A00 | hard graphite |
| 26 566 AL0 | brushed hard graphite |

Rainshower Mono 310 Cube

Head shower set ceiling 142 mm, 1 spray
head shower Rainshower 310
1 spray pattern: GROHE PureRain
maximum flow rate (at 3 bar): 7.5 l/min
Rainshower shower arm ceiling 142 mm (27 485)
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life


26 565 000 chrome
ditto, with non-restricted flow



| | |
|------------|--------|
| 26 256 000 | chrome |
|------------|--------|

Rainshower Cosmopolitan 400
Head shower set ceiling 142 mm, 1 spray
head shower Rainshower Cosmopolitan 400 (28 778)
1 spray pattern:
Rain
maximum flow rate (at 3 bar): 7.5 l/min
Rainshower shower arm ceiling 142 mm (28 724)
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
suitable for instantaneous heater

GROHE HEAD SHOWER SETS



Ref. no.

Colour

| | |
|------------|-----------------------|
| 26 066 000 | chrome |
| 26 066 DC0 | supersteel |
| 26 066 GLO | cool sunrise |
| 26 066 GN0 | brushed cool sunrise |
| 26 066 DAO | warm sunset |
| 26 066 DL0 | brushed warm sunset |
| 26 066 A00 | hard graphite |
| 26 066 AL0 | brushed hard graphite |

Rainshower Cosmopolitan 310

Head shower set 380 mm, 1 spray

Head shower Rainshower Cosmopolitan 310 (27 478)

material: metal

1 spray pattern: Rain

maximum flow rate (at 3 bar): 8 l/min


Shower arm Rainshower 380 mm (28 361)

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system



| | |
|------------|-----------------------|
| 26 067 000 | chrome |
| 26 067 DC0 | supersteel |
| 26 067 GLO | cool sunrise |
| 26 067 GN0 | brushed cool sunrise |
| 26 067 DAO | warm sunset |
| 26 067 DL0 | brushed warm sunset |
| 26 067 A00 | hard graphite |
| 26 067 AL0 | brushed hard graphite |

Rainshower Cosmopolitan 310

Head shower set ceiling 142 mm, 1 spray

Head shower Rainshower Cosmopolitan 310 (27 478)

material: metal

1 spray pattern: Rain

maximum flow rate (at 3 bar): 8 l/min


Rainshower shower arm ceiling 142 mm (28 724)

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system



26 459 000 chrome

Euphoria 260

Head shower set 380 mm, 3 sprays

head shower Euphoria 260 (26 457)

3 spray patterns: Rain, SmartRain, Jet

maximum flow rate (at 3 bar): 7.5 l/min

Shower arm Rainshower 380 mm (28 361)


GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life



26 461 000 chrome

Euphoria 260

Head shower set ceiling 142 mm, 3 sprays

head shower Euphoria 260 (26 457)

3 spray patterns: Rain, SmartRain, Jet

maximum flow rate (at 3 bar): 7.5 l/min

Rainshower shower arm ceiling 142 mm (28 724)

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern


GROHE Long-Life finish

SpeedClean anti-lime system


Inner WaterGuide for a longer life

GROHE HEAD SHOWER SETS


Ref. no. Colour



26 073 000 chrome
Euphoria Cube 150
Head shower set 286 mm, 1 spray
head shower Euphoria Cube 150 (27 705 000)
1 spray pattern:
Rain
maximum flow rate (at 3 bar): 8 l/min
shower arm Rainshower 286 mm (27 709)
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater




26 663 000 chrome
Tempesta 250
Head shower set 380 mm, 1 spray
head shower Tempesta 250 (26 662)
1 spray pattern:
Rain
fully chrome plated surfaces
shower arm 380 mm (28 361)
GROHE Water Saving 9.5 l/min flow limiter
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater



26 668 000 chrome
ditto, but head shower with white rear cover

26 668 2430 matte black
Tempesta 250
Head shower set 380 mm, 1 spray
head shower Tempesta 250
1 spray pattern:
Rain
shower arm 380 mm
GROHE Water Saving 9.5 l/min flow limiter
GROHE DreamSpray perfect spray pattern
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater




26 664 000 chrome
Tempesta 250
Head shower set ceiling 142 mm, 1 spray
head shower Tempesta 250 (26 662)
spray pattern:
Rain
fully chrome plated surfaces
shower arm ceiling 142 mm (28 724)
GROHE Water Saving 9.5 l/min flow limiter
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater

26 669 000 chrome
ditto, but head shower with white rear cover

26 669 2430 matte black
ditto, head shower with black rear cover

GROHE HEAD SHOWER SETS

Ref. no. Colour




26 682 000 chrome

Tempesta 250 Cube
Head shower set 380 mm, 1 spray
head shower Tempesta 250 Cube (26 681)
spray pattern:

Rain
fully chrome plated surfaces
shower arm 380 mm
with square escutcheon
GROHE Water Saving 9.5 l/min flow limiter
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater

26 687 000 chrome
ditto, but head shower with white rear cover

26 687 2430 matte black
ditto, head shower with black rear cover




26 683 000 chrome

Tempesta 250 Cube
Head shower set ceiling 142 mm, 1 spray
head shower Tempesta 250 Cube (26 681)
1 spray pattern:
Rain
fully chrome plated surfaces
shower arm ceiling 142 mm (27 485)
with square escutcheon
GROHE Water Saving 9.5 l/min flow limiter
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater


26 688 000 chrome
ditto, but head shower with white rear cover

26 688 2430 matte black
ditto, head shower with black rear cover



26 412 000 chrome
102218 243 0 matte black

Tempesta 210
Head shower set 286 mm, 1 spray
head shower Tempesta 210 9.5 l/min (26 410)
1 spray pattern: Rain
maximum flow rate (at 3 bar): 8.5 l/min
Shower arm Rainshower 286 mm (28 576)
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
SpeedClean anti-lime system
Inner WaterGuide for a longer life




27 870 001 chrome

Tempesta 100
Head shower set 4 sprays
GROHE Rain O², Rain, Massage, Jet
maximum flow rate (at 3 bar): 6.5 l/min
ball joint ± 15° rotatable
shower arm with connection thread 1/2"
GROHE Water Saving Plus - extra efficient water usage, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life

GROHE HEAD SHOWER SETS

Ref. no. Colour




26 088 001 chrome

Tempesta 100

Head shower set 3 sprays

GROHE Rain O², Rain, Massage
maximum flow rate (at 3 bar): 12 l/min
ball joint $\pm 15^\circ$ rotatable
shower arm with connection thread 1/2" escutcheon

GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater




26 267 001 chrome

Tempesta 100

Head shower 1 spray

1 spray pattern:
Rain
maximum flow rate (at 3 bar): 18 l/min
ball joint $\pm 15^\circ$ rotatable
shower arm with connection thread 1/2" escutcheon

GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
for low pressure



27 869 001 chrome





Cosmopolitan 100

Head shower 4 sprays

GROHE Rain O², Rain, Massage, Jet
maximum flow rate (at 3 bar): 8.5 l/min
ball joint $\pm 15^\circ$ rotatable
shower arm with connection thread 1/2"


GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life

GROHE HEAD SHOWERS


| Ref. no. | Colour |
|---|------------|
| 26 569 000 | chrome |
| Rainshower Mono 310 Head shower 1 spray | |
| spray pattern: GROHE PureRain maximum flow rate (at 3 bar): 5 l/min spray plate chrome ball joint with turning angle $\pm 10^\circ$ connection thread 1/2" | |
|  | |
|  | |
| 26 562 000 | chrome |
| ditto, with GROHE Water Saving 7.5 l/min flow limiter | |
| 26 570 000 | chrome |
| Rainshower Mono 310 Cube Head shower 1 spray | |
| spray pattern: GROHE PureRain maximum flow rate (at 3 bar): 6 l/min spray plate chrome ball joint with turning angle $\pm 10^\circ$ connection thread 1/2" | |
|  | |
|  | |
| 26 568 000 | chrome |
| ditto, with GROHE Water Saving 7.5 l/min flow limiter | |
| 26 568 LS0 | moon white |
| Rainshower Mono 310 Cube Head shower 1 spray | |
| spray pattern: GROHE PureRain maximum flow rate (at 3 bar): 7.5 l/min spray plate moon white ball joint with turning angle $\pm 10^\circ$ connection thread 1/2" | |
|  | |
|  | |
| 27 470 000 | chrome |
| Rainshower Veris 300 Head shower 1 spray | |
| spray pattern: Rain 300 x 150 mm material: metal ball joint with turning angle $\pm 15^\circ$ connection thread 1/2" | |
|  | |
|  | |

GROHE HEAD SHOWERS


Ref. no. Colour




28 778 000 chrome
Rainshower Cosmopolitan 400
Head shower 1 spray
 normal spray
 maximum flow rate (at 3 bar): 7.5 l/min
 \varnothing 400 mm
 material: metal
 ball joint with turning angle $20^\circ \pm 20^\circ$
 connection thread 1/2"
GROHE DreamSpray perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system
 this head shower should only be used in conjunction with shower arm 26 146, 28 982 or 28 497



26 472 000 chrome
Rainshower Cosmopolitan 310
Head shower 1 spray
 spray pattern:
 Rain
 maximum flow rate (at 3 bar): 5.5 l/min
 \varnothing 310 mm
 material: metal
 ball joint with turning angle $20^\circ \pm 20^\circ$
 connection thread 1/2"
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
 suitable for instantaneous heater



28 368 00E chrome
Rainshower Cosmopolitan 210
Head shower 1 spray
 spray pattern:
 Rain
 maximum flow rate (at 3 bar): 5 l/min
 \varnothing 210 mm
 material: metal
 with ball joint
 rotation angle $\pm 15^\circ$
 connection thread 1/2"
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system









28 373 000 chrome
ditto, with GROHE Water Saving 8 l/min flow limiter

27 814 001 chrome
Rainshower Cosmopolitan 210
Head shower 1 spray
 spray pattern:
 Rain
 starting at 0.5 bar flow pressure
 maximum flow rate (at 3 bar): 6.5 l/min
 \varnothing 210 mm
 material: metal
 120 spray nozzles
 with ball joint
 rotation angle $\pm 15^\circ$
 connection thread 1/2"
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system


GROHE HEAD SHOWERS

| Ref. no. | Colour |
|--|--------|
| 27 062 000 Relexa 100 Five Head shower 5 sprays | chrome |
| <p>spray patterns: Normal, Jet, Rain, Massage, Champagne spray maximum flow rate (at 3 bar): 20 l/min ball-joint installation dependent angle of inclination connection thread with pre-assembled sealing GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life minimum flow rate 7.5 l/min.</p> | |
| 26 456 000 Euphoria 260 Head shower 3 sprays | chrome |
| <p>spray patterns: Rain, SmartRain, Jet maximum flow rate (at 3 bar): 6 l/min Ø 260 mm ball joint ± 15° rotatable connection thread 1/2" GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life</p> | |
| 26 457 000 ditto, maximum flow rate (at 3 bar): 7.5 l/min | chrome |
| 27 492 000 Euphoria Cosmopolitan 180 Head shower 1 spray | chrome |
| <p>spray pattern: Rain maximum flow rate (at 3 bar): 7.5 l/min Ø 180 mm ball joint ± 15° rotatable connection thread 1/2" GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system</p> | |
| 26 468 000 Euphoria Cube 150 Head shower 1 spray | chrome |
| <p>spray pattern: Rain maximum flow rate (at 3 bar): 6 l/min 152 x 152 mm ball-joint rotation angle ± 12° connection thread 1/2" GROHE Water Saving Plus - extra efficient water usage, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life suitable for instantaneous heater</p> | |
| 27 705 000 Euphoria Cube 150 Head shower 1 spray | chrome |
| <p>spray pattern: Rain maximum flow rate (at 3 bar): 8 l/min 152 x 152 mm ball-joint, rotation angle ± 12° connection thread 1/2" GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life</p> | |

GROHE HEAD SHOWERS

| Ref. no. | Colour |
|--|---|
|   | 26 662 000 chrome Tempesta 250 Head shower 1 spray Rain Ø 250 mm fully chrome plated surfaces ball joint with turning angle ± 10° connection thread 1/2" GROHE Water Saving 9.5 l/min flow limiter GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life |
|   | 26 666 000 chrome ditto, but with white rear cover |
|   | 26 681 000 chrome Tempesta 250 Cube Head shower 1 spray spray pattern: Rain 250 mm x 250 mm fully chrome plated surfaces ball joint with turning angle ± 10° connection thread 1/2" GROHE Water Saving 9.5 l/min flow limiter GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life |
|   | 26 685 000 chrome ditto, but with white rear cover |
|   | 26 409 000 chrome Tempesta 210 Head shower 1 spray spray pattern: Rain maximum flow rate (at 3 bar): 6 l/min Ø 210 mm ball joint ± 15° rotatable connection thread 1/2" GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life |
|   | 26 410 000 chrome ditto, maximum flow rate (at 3 bar): 8.5 l/min |
|   | 27 541 001 chrome Tempesta Cosmopolitan 200 Head shower 1 spray spray pattern: Rain ball joint +/- 20° rotatable connection thread 1/2" |

GROHE ACCESSORIES FOR HEAD SHOWERS

| | Ref. no. | Colour |
|---|--|--------|
|  | 26 146 000 Rainshower Shower arm 422 mm material: metal connection thread 1/2" with round escutcheon, suitable for all Rainshower head showers GROHE Long-Life finish | chrome |
|  | 28 982 000 Rainshower Shower arm, 380 mm material: metal connection thread 1/2" suitable for all Rainshower head showers except Rainshower 400 mm GROHE Long-Life finish | chrome |
|  | 28 361 000 Rainshower Shower arm, 380 mm material: metal connection thread 1/2" suitable for all Rainshower head showers except Rainshower 400 mm GROHE Long-Life finish | chrome |
|  | 28 576 000 Rainshower Shower arm 422 mm material: metal connection thread 1/2" with square escutcheon suitable for all Rainshower head showers GROHE Long-Life finish | chrome |
|  | 26 145 000 Rainshower Shower arm 422 mm material: metal connection thread 1/2" with square escutcheon suitable for all Rainshower head showers GROHE Long-Life finish | chrome |
|  | 27 488 000 Rainshower Shower arm 286 mm material: metal connection thread 1/2" with square escutcheon suitable for all Rainshower head showers GROHE Long-Life finish | chrome |
|  | 27 709 000 Rainshower Shower arm 286 mm material: metal connection thread 1/2" with square escutcheon and rectangular arm suitable for square Rainshower Allure and Euphoria Cube head shower GROHE Long-Life finish | chrome |

GROHE ACCESSORIES FOR HEAD SHOWERS

Ref. no.


Colour



28 497 000 chrome
Rainshower
Shower arm ceiling 292 mm
material: metal
connection thread 1/2"
with round escutcheon
suitable for all Rainshower head showers
GROHE Long-Life finish


28 724 000 chrome
ditto, length 142 mm

28 724 LS0 moon white/chrome
ditto, length 142 mm, with white escutcheon




27 484 000 chrome
Rainshower
Shower arm ceiling 292 mm
material: metal
connection thread 1/2"
with square escutcheon
suitable for all Rainshower head showers
GROHE Long-Life finish

27 485 000 chrome
ditto, length 142 mm



27 711 000 chrome
Rainshower
Shower arm ceiling 154 mm
material: metal
connection thread 1/2"
GROHE Long-Life finish



27 406 000 chrome
Relexa
Shower arm 218 mm
connection thread 1/2"
projection 218 mm
escutcheon
GROHE Long-Life finish



48 348 000 chrome
Spray face
for SmartControl and head showers with multiple Bokoma sprays
including spray face with / without GROHE Logo
including disassembly-key


GROHE RAINSHOWER SMARTACTIVE

| Ref. no. | Colour |
|--|--|
| 26 574 000 26 574 DCO 26 574 GLO 26 574 GN0 26 574 DAO 26 574 DL0 26 574 A00 26 574 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| Rainshower SmartActive 130 Hand shower 3 sprays spray plate chrome spray patterns: GROHE Rain including DripStop, Jet including DripStop, ActiveMassage maximum flow rate (at 3 bar): 8.5 l/min GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE SmartTip showering spray selection via push of a ring GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life universal mounting system, fitting all standard shower hoses | |
| 22 127 KF0 ditto, Professional exclusive | phantom black |
| 26 545 000 26 545 GN0 26 545 A00 ditto, maximum flow rate (at 3 bar): 5.5 l/min | chrome brushed cool sunrise hard graphite |
| 26 574 LS0 Rainshower SmartActive 130 Hand shower 3 sprays spray plate moon white spray patterns: GROHE Rain including DripStop, Jet including DripStop, ActiveMassage maximum flow rate (at 3 bar): 8.5 l/min GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE SmartTip showering spray selection via push of a ring GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life universal mounting system, fitting all standard shower hoses | moon white |
| 26 575 000 Rainshower SmartActive 130 Shower rail set 3 sprays hand shower Rainshower SmartActive 130 (26 574) maximum flow rate (at 3 bar): 8.5 l/min shower rail 600 mm wall holders made of metal Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) GROHE EasyReach tray GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish GROHE FastFixation Plus adjustable distance between brackets for fixing to existing drilling holes GROHE TileFix adjustable depth on upper and lower bracket SpeedClean anti-lime system Inner WaterGuide for a longer life TwistStop to prevent hose from twisting | chrome |
| 26 547 000 ditto, maximum flow rate (at 3 bar): 5.5 l/min | chrome |

GROHE RAINSHOWER SMARTACTIVE

Ref. no.

Colour



26 577 LS0 moon white

Rainshower SmartActive 130

Shower rail set 3 sprays

hand shower Rainshower SmartActive 130 (26 574)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

shower rail 600 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 548 000 chrome

Rainshower SmartActive 130

Shower rail set 3 sprays

hand shower Rainshower SmartActive 130 (26 574)

maximum flow rate (at 3 bar): 8.5 l/min

shower rail 900 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 579 LS0 moon white

Rainshower SmartActive 130

Shower rail set 3 sprays

hand shower Rainshower SmartActive 130 (26 574)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

shower rail 900 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 581 000 chrome

Rainshower SmartActive 130

Wall holder set 3 sprays

hand shower Rainshower SmartActive 130 (26 574)

maximum flow rate (at 3 bar): 8.5 l/min

wall shower holder (27 056)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting


26 581 LS0 moon white

ditto, with white spray plate

GROHE RAINSHOWER SMARTACTIVE

Ref. no.

Colour




| | |
|--|------------|
| 26 580 000 | chrome |
| Rainshower SmartActive 130 | |
| Wall holder set 3 sprays | |
| hand shower Rainshower SmartActive 130 (26 574) | |
| maximum flow rate (at 3 bar): 8.5 l/min | |
| wall shower holder, adjustable (27 055) | |
| Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| Inner WaterGuide for a longer life | |
| TwistStop to prevent hose from twisting | |
| 26 580 LS0 | moon white |
| ditto, with white spray plate | |



| | |
|--|-----------------------|
| 26 582 000 | chrome |
| 26 582 DC0 | supersteel |
| 26 582 GL0 | cool sunrise |
| 26 582 GN0 | brushed cool sunrise |
| 26 582 DAO | warm sunset |
| 26 582 DL0 | brushed warm sunset |
| 26 582 A00 | hard graphite |
| 26 582 AL0 | brushed hard graphite |
| Rainshower SmartActive 130 Cube | |
| Hand shower 3 sprays | |
| spray plate chrome | |
| spray patterns: | |
| GROHE Rain including DripStop, Jet including DripStop, ActiveMassage | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 8.5 l/min | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE SmartTip showering spray selection via push of a ring | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| Inner WaterGuide for a longer life | |
| universal mounting system, fitting all standard shower hoses | |
| 26 552 000 | chrome |
| ditto, maximum flow rate (at 3 bar): 5.5 l/min | |



| | |
|--|------------|
| 26 582 LS0 | moon white |
| Rainshower SmartActive 130 Cube | |
| Hand shower 3 sprays | |
| spray plate moon white | |
| spray patterns: | |
| GROHE Rain including DripStop, Jet including DripStop, ActiveMassage | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 8.5 l/min | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE SmartTip showering spray selection via push of a ring | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| Inner WaterGuide for a longer life | |
| universal mounting system, fitting all standard shower hoses | |




| | |
|---|--------|
| 26 584 000 | chrome |
| Rainshower SmartActive 130 Cube | |
| Shower rail set 3 sprays | |
| hand shower Rainshower SmartActive 130 Cube (26 582) | |
| maximum flow rate (at 3 bar): 8.5 l/min | |
| shower rail 600 mm | |
| wall holders made of metal | |
| Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) | |
| GROHE EasyReach tray | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation Plus adjustable distance between brackets for fixing to existing drilling holes | |
| GROHE TileFix adjustable depth on upper and lower bracket | |
| SpeedClean anti-lime system | |
| Inner WaterGuide for a longer life | |
| TwistStop to prevent hose from twisting | |

| | |
|--|--------|
| 26 585 000 | chrome |
| ditto, maximum flow rate (at 3 bar): 5.5 l/min | |

GROHE RAINSHOWER SMARTACTIVE

Ref. no.

Colour



26 584 LS0 moon white

Rainshower SmartActive 130 Cube

Shower rail set 3 sprays

hand shower Rainshower SmartActive 130 Cube (26 582)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

shower rail 600 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 587 000 chrome

Rainshower SmartActive 130 Cube

Shower rail set 3 sprays

hand shower Rainshower SmartActive 130 Cube (26 582)

maximum flow rate (at 3 bar): 8.5 l/min

shower rail 900 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 587 LS0 moon white

Rainshower SmartActive 130 Cube

Shower rail set 3 sprays

hand shower Rainshower SmartActive 130 Cube (26 582)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

shower rail 900 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 589 000 chrome

Rainshower SmartActive 130 Cube

Wall holder set 3 sprays

hand shower Rainshower SmartActive 130 Cube (26 582)

maximum flow rate (at 3 bar): 8.5 l/min

wall shower holder (27 056)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system


Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

GROHE RAINSHOWER SMARTACTIVE

Ref. no.

Colour



26 589 LS0 moon white

Rainshower SmartActive 130 Cube

Wall holder set 3 sprays

hand shower Rainshower SmartActive 130 Cube (26 582)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

wall shower holder (27 056)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

GROHE Water Saving - Less water, perfect flow


GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 588 000 chrome

Rainshower SmartActive 130 Cube

Wall holder set 3 sprays

hand shower Rainshower SmartActive 130 Cube (26 582)

maximum flow rate (at 3 bar): 8.5 l/min

wall shower holder, adjustable (27 055)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

GROHE Water Saving - Less water, perfect flow


GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 588 LS0 moon white

Rainshower SmartActive 130 Cube

Wall holder set 3 sprays

hand shower Rainshower SmartActive 130 Cube (26 582)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

wall shower holder, adjustable (27 055)

Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 590 000 chrome

Rainshower SmartActive 150

Hand shower 3 sprays

spray plate chrome

spray patterns:

GROHE Rain including DripStop, Jet including DripStop, ActiveMassage

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 8.5 l/min

GROHE DreamSpray perfect spray pattern

GROHE SmartTip showering spray selection via push of a ring


GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses

male connection thread 1/2"



26 554 LS0 moon white

Rainshower SmartActive 150

Hand shower 3 sprays

spray plate moon white

spray patterns:

GROHE Rain including DripStop, Jet including DripStop, ActiveMassage

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 8.5 l/min

GROHE DreamSpray perfect spray pattern

GROHE SmartTip showering spray selection via push of a ring

GROHE Long-Life finish

SpeedClean anti-lime system


Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses

GROHE RAINSHOWER SMARTACTIVE

Ref. no.

Colour



26 592 000 chrome

Rainshower SmartActive 150

Shower rail set 3 sprays

hand shower Rainshower SmartActive 150 (26 590)

maximum flow rate (at 3 bar): 8.5 l/min

shower rail 600 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 592 LS0 moon white

Rainshower SmartActive 150

Shower rail set 3 sprays

hand shower Rainshower SmartActive 150 (26 554)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

shower rail 600 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 594 000 chrome

Rainshower SmartActive 150

Shower rail set 3 sprays

hand shower Rainshower SmartActive 150 (26 590)

maximum flow rate (at 3 bar): 8.5 l/min

shower rail 900 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between


brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system

Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting



26 594 LS0 moon white

Rainshower SmartActive 150

Shower rail set 3 sprays

hand shower Rainshower SmartActive 150 (26 554)

maximum flow rate (at 3 bar): 8.5 l/min

spray plate moon white

shower rail 900 mm

wall holders made of metal

Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)

GROHE EasyReach tray

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation Plus adjustable distance between

brackets for fixing to existing drilling holes

GROHE TileFix adjustable depth on upper and lower bracket

SpeedClean anti-lime system


Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

GROHE RAINSHOWER SMARTACTIVE


Ref. no.

Colour



22 125 KF0 phantom black

Rainshower SmartActive
Shower rail, 900 mm
wall holders made of metal
glide element and swivel holder
GROHE QuickFix Plus (adjustable distance
between wall shower holders)
GROHE TileFix adjustable depth on upper and lower bracket
GROHE EasyReach tray




26 604 000 chrome


Rainshower SmartActive 130
Shower set 3 sprays
hand shower Rainshower SmartActive 130 (26 545)
maximum flow rate (at 3 bar): 5.5 l/min
hand shower wall holder
Rotaflex Metal Long-Life TwistStop shower hose 1500 mm (28 417)
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
suitable for instantaneous heater

GROHE EUPHORIA


Ref. no. Colour



27 222 000 chrome
Euphoria 110 Champagne
Hand shower 3 sprays
spray patterns:
Rain / Champagne spray / SmartRain
maximum flow rate (at 3 bar): 17 l/min
GROHE DreamSpray perfect spray pattern
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
universal mounting system, fitting all standard shower hoses




26 513 000 chrome
Euphoria 110 Massage
Hand shower 3 sprays
spray face Ø 110 mm
spray patterns:
Rain, Massage, SmartRain
maximum flow rate (at 3 bar): 6.4 l/min
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Long-Life finish
spray plate white
SpeedClean anti-lime system
Inner WaterGuide for a longer life
universal mounting system, fitting all standard shower hoses



27 239 001 chrome
Euphoria 110 Massage
Hand shower 3 sprays
spray patterns:
Rain, Massage, SmartRain
maximum flow rate (at 3 bar): 8.2 l/min
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Long-Life finish
spray plate white
SpeedClean anti-lime system
Inner WaterGuide for a longer life
universal mounting system, fitting all standard shower hoses



27 238 000 chrome
Euphoria 110 Duo
Hand shower 2 sprays
spray patterns:
Rain, SmartRain
maximum flow rate (at 3 bar): 9.1 l/min
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
universal mounting system, fitting all standard shower hoses
suitable for instantaneous heater



27 265 00E chrome
Euphoria 110 Mono
Hand shower 1 spray
spray pattern:
Rain
maximum flow rate (at 3 bar): 5.5 l/min
GROHE Water Saving Plus - extra efficient water usage, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
universal mounting system, fitting all standard shower hoses
suitable for instantaneous heater

GROHE EUPHORIA

| | Ref. no. | Colour |
|---|--------------------------|---------------------------------|
|  | 27 232 001 | chrome |
|  | 27 266 00E | chrome |
|  | 27 227 001 | chrome |
|  | 27 226 001 27 226 AL1 | chrome brushed hard graphite |

Euphoria 110 Champagne
Shower rail set 3 sprays
handshower Champagne (27 222)
maximum flow rate (at 3 bar): 17 l/min
shower rail, 600 mm (27 499)
Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE EasyReach tray (27 596)
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
GROHE FastFixation upper bracket adjustable
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting


Euphoria 110 Mono
Shower rail set 1 spray
hand shower Euphoria Mono (27 265 000)
maximum flow rate (at 3 bar): 5.5 l/min
shower rail, 600 mm (27 499)
Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE EasyReach tray
GROHE Water Saving Plus - extra efficient water usage, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
GROHE FastFixation upper bracket adjustable
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
suitable for instantaneous heater

Euphoria 110 Champagne
Shower rail set 3 sprays
handshower Champagne (27 222)
maximum flow rate (at 3 bar): 17 l/min
shower rail 900 mm (27 500)
Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE EasyReach tray (27 596)
GROHE DreamSpray perfect spray pattern
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Long-Life finish
GROHE FastFixation upper bracket adjustable
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting


Euphoria 110 Massage
Shower rail set 3 sprays
hand shower Massage (27 221 000)
maximum flow rate (at 3 bar): 16.6 l/min
shower rail 900 mm (27 500)
Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE EasyReach tray (27 596)
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE FastFixation upper bracket adjustable
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting

GROHE EUPHORIA


Ref. no. Colour




27 225 001 chrome
Euphoria 110 Duo
Shower rail set 2 sprays
hand shower Duo (27 220)
maximum flow rate (at 3 bar): 16.6 l/min
shower rail 900 mm (27 500)
Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE EasyReach tray (27 596)
GROHE DreamSpray perfect spray pattern
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Long-Life finish
GROHE FastFixation upper bracket adjustable
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
suitable for instantaneous heater



27 267 001 chrome
Euphoria 110 Mono
Shower rail set 1 spray
hand shower Mono (27 265)
maximum flow rate (at 3 bar): 21.7 l/min
shower rail 900 mm (27 500)
Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE EasyReach tray (27 596)
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
GROHE FastFixation upper bracket adjustable
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
suitable for instantaneous heater




27 355 000 chrome
Euphoria 110 Champagne
Wall holder set 3 sprays
hand shower Champagne (27 222)
maximum flow rate (at 3 bar): 17 l/min
wall shower holder
Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
GROHE DreamSpray perfect spray pattern
GROHE SprayDimmer (Stepless flow rate reduction)
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting



27 354 000 chrome
Euphoria 110 Mono
Wall holder set 1 spray
hand shower Mono (27 265)
maximum flow rate (at 3 bar): 21.7 l/min
wall shower holder (27 056)
Silverflex shower hose 1.250 mm (28 362)
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
suitable for instantaneous heater

GROHE EUPHORIA



Ref. no. Colour

27 499 000 chrome
Euphoria
Shower rail, 600 mm
with wall holders, glide element and swivel holder
GROHE FastFixation upper bracket adjustable
GROHE Long-Life finish

27 500 000 chrome
ditto, 900 mm

GROHE EUPHORIA


Ref. no. Colour




27 400 000 chrome
Euphoria Cosmopolitan Stick
Hand shower 1 spray
 spray pattern:
 Normal spray
 maximum flow rate (at 3 bar): 8.2 l/min
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
 universal mounting system, fitting all standard shower hoses

22 126 KF0 phantom black
 ditto, Professional exclusive


26 466 000 chrome
 ditto, maximum flow rate (at 3 bar): 6 l/min



27 368 000 chrome
Euphoria Cosmopolitan Stick
Shower rail set 1 spray
 handshower (27 400)
 spray pattern:
 Normal spray
 maximum flow rate (at 3 bar): 8.2 l/min
 shower rail, 900 mm
 wall holders made of metal
 Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388)
 soap dish (27 206)
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
GROHE FastFixation Plus adjustable distance between
 brackets for fixing to existing drilling holes
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting



26 404 000 chrome
Euphoria Cosmopolitan Stick
Wall holder set 1 spray
 handshower (27 400)
 maximum flow rate (at 3 bar): 8.2 l/min
 shower outlet elbow 1/2" with wall shower holder (28 679)
 protected against backflow
 Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting




27 369 000 chrome
Euphoria Cosmopolitan Stick
Wall holder set 1 spray
 handshower (27 400)
 maximum flow rate (at 3 bar): 8.2 l/min
 wall shower holder (27 056)
 Silverflex shower hose 1500 mm 1/2" x 1/2" (28 364)
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting

GROHE EUPHORIA


| | Ref. no. | Colour |
|---|------------|--------|
| | 27 891 000 | chrome |
| Euphoria Cube+ Stick Shower rail set 1 spray hand shower, metal spray pattern: Normal spray maximum flow rate (at 3 bar): 8.2 l/min shower rail 600 mm (27 892 000) metal shower hose 1750 mm (28 025) GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life TwistStop to prevent hose from twisting suitable for instantaneous heater | | |
| | 27 699 000 | chrome |
| Euphoria Cube Stick Hand shower 1 spray spray pattern: Normal spray maximum flow rate (at 3 bar): 8.2 l/min GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life universal mounting system, fitting all standard shower hoses | | |
| | 27 700 000 | chrome |
| Euphoria Cube Stick Shower rail set 1 spray hand shower (27 698) spray pattern: Normal spray maximum flow rate (at 3 bar): 15 l/min shower rail 900 mm (27 841) Silverflex shower hose 1750 mm 1/2" x 1/2" (28 388) GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life TwistStop to prevent hose from twisting | | |
| | 26 405 000 | chrome |
| Euphoria Cube Stick Wall holder set 1 spray hand shower (27 699 000) maximum flow rate (at 3 bar): 8.2 l/min shower outlet elbow 1/2" with wall shower holder (26 370) protected against backflow Silverflex shower hose 1.250 mm (28 362) GROHE Water Saving - Less water, perfect flow GROHE Long-Life finish GROHE DreamSpray perfect spray pattern SpeedClean anti-lime system Inner WaterGuide for a longer life TwistStop to prevent hose from twisting | | |
| | 27 703 000 | chrome |
| Euphoria Cube Stick Wall holder set 1 spray hand shower (27 699 000) maximum flow rate (at 3 bar): 8.2 l/min wall shower holder (27 693) Silverflex shower hose 1.250 mm (28 362) GROHE Water Saving - Less water, perfect flow GROHE DreamSpray perfect spray pattern GROHE Long-Life finish SpeedClean anti-lime system Inner WaterGuide for a longer life TwistStop to prevent hose from twisting suitable for instantaneous heater | | |

GROHE EUPHORIA

Ref. no. Colour



26 073 000 chrome
Euphoria Cube 150
Head shower set 286 mm, 1 spray
head shower Euphoria Cube 150 (27 705 000)
1 spray pattern:
Rain
maximum flow rate (at 3 bar): 8 l/min
shower arm Rainshower 286 mm (27 709)
GROHE Water Saving - Less water, perfect flow
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
suitable for instantaneous heater



27 845 000 chrome
Euphoria Cube
Compensation disc
for Euphoria Cube shower bars 27 892 000 / 27 841 000




26 634 000 chrome
Euphoria Cube
Shower outlet elbow 1/2"
1/2" NPT female thread
protected against backflow
GROHE Long-Life finish

GROHE TEMPESTA

Ref. no.

Colour



28 419 003

chrome

Tempesta 110

Hand shower 3 sprays

Rain, Jet, Massage

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages

caused by shower falling

universal mounting system, fitting all standard shower hoses

maximum flow rate (at 3 bar): 7.4 l/min

minimum pressure 1.0 bar


suitable for instantaneous heater

professional edition

26 914 003

chrome

ditto, maximum flow rate (at 3 bar): 6.4 l/min



27 597 30E

chrome

Tempesta 110

Hand shower 2 sprays

spray patterns:

Rain, Jet

GROHE Water Saving Plus - extra efficient water usage, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages

caused by shower falling

universal mounting system, fitting all standard shower hoses

maximum flow rate (at 3 bar): 5.6 l/min

minimum pressure 1.0 bar

suitable for instantaneous heater

professional edition

26 161 003

chrome

26 161 2433 matte black

ditto, maximum flow rate (at 3 bar): 7.4 l/min



27 923 003

chrome

Tempesta 110

Hand shower 1 spray

Rain

GROHE Water Saving - Less water, perfect flow

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages

caused by shower falling

universal mounting system, fitting all standard shower hoses

maximum flow rate (at 3 bar): 7.6 l/min


minimum pressure 1.0 bar

suitable for instantaneous heater

professional edition

GROHE TEMPESTA


Ref. no. Colour



| | |
|---|--------|
| 27 600 003 | chrome |
| Tempesta 110 | |
| Shower rail set 3 sprays (Rain, Jet, Massage) | |
| hand shower Tempesta 110 (28 419) | |
| shower rail, 600 mm (27 523) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE EasyReach tray (26 770) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| minimum pressure 1.0 bar | |
| suitable for instantaneous heater | |
| professional edition | |

| | |
|--|--------|
| 26 918 003 | chrome |
| ditto, maximum flow rate (at 3 bar): 7.4 l/min and metal shower hose | |


| | |
|--|--------|
| 26 917 003 | chrome |
| ditto, maximum flow rate (at 3 bar): 6.4 l/min and metal shower hose | |



| | |
|---|--------|
| 26 638 003 | chrome |
| Tempesta 110 | |
| Shower rail set 2 sprays (Rain, Jet) | |
| hand shower Tempesta 110 (26 161) | |
| shower rail, 600 mm (27 523) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE EasyReach tray (26 770) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| suitable for instantaneous heater | |
| professional edition | |


| | |
|---|--------|
| 27 644 003 | chrome |
| Tempesta 110 | |
| Shower rail set 3 sprays (Rain, Jet, Massage) | |
| hand shower Tempesta 110 (28 419) | |
| shower rail, 600 mm (27 523) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| minimum pressure 1.0 bar | |
| suitable for instantaneous heater | |
| professional edition | |

| | |
|--|--------|
| 26 919 003 | chrome |
| ditto, maximum flow rate (at 3 bar): 6.4 l/min | |




GROHE TEMPESTA


Ref. no. Colour



| | |
|---|-------------|
| 27 598 30E | chrome |
| Tempesta 110 | |
| Shower rail set 2 sprays (Rain, Jet) | |
| hand shower Tempesta 110 (27 597) | |
| shower rail, 600 mm (27 523) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE Water Saving Plus - extra efficient water usage, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| maximum flow rate (at 3 bar): 5.6 l/min | |
| suitable for instantaneous heater | |
| professional edition | |
| 26 915 003 | chrome |
| 26 915 2433 | matte black |
| ditto, maximum flow rate (at 3 bar): 6.1 l/min | |
| 26 162 003 | chrome |
| 26 162 2433 | matte black |
| ditto, maximum flow rate (at 3 bar): 7.4 l/min | |




| | |
|---|--------|
| 27 924 003 | chrome |
| Tempesta 110 | |
| Shower rail set 1 spray (Rain) | |
| hand shower Tempesta 110 (27 923) | |
| shower rail, 600 mm (27 523) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| maximum flow rate (at 3 bar): 7.6 l/min | |
| suitable for instantaneous heater | |
| professional edition | |




| | |
|---|--------|
| 26 771 003 | chrome |
| Tempesta 110 | |
| Shower rail set 3 sprays (Rain, Jet, Massage) | |
| hand shower Tempesta 110 (28 419) | |
| shower rail, 900 mm (27 524) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| minimum pressure 1.0 bar | |
| suitable for instantaneous heater | |
| professional edition | |

GROHE TEMPESTA


Ref. no. Colour



| | |
|---|-------------|
| 27 646 30E | chrome |
| Tempesta 110 | |
| Shower rail set 2 sprays (Rain, Jet) | |
| hand shower Tempesta 110 (27 597) | |
| shower rail, 900 mm (27 524) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE Water Saving Plus - extra efficient water usage, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| maximum flow rate (at 3 bar): 5.6 l/min | |
| suitable for instantaneous heater | |
| professional edition | |
| 26 163 003 | chrome |
| 26 163 2433 | matte black |
| ditto, maximum flow rate (at 3 bar): 7.4 l/min | |




| | |
|---|--------|
| 27 925 003 | chrome |
| Tempesta 110 | |
| Shower rail set 1 spray (Rain) | |
| hand shower Tempesta 110 (27 923) | |
| shower rail, 900 mm (27 524) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| maximum flow rate (at 3 bar): 7.6 l/min | |
| suitable for instantaneous heater | |
| professional edition | |



| | |
|---|--------|
| 27 601 30E | chrome |
| Tempesta 110 | |
| Wall holder set 2 sprays (Rain, Jet) | |
| consisting of: | |
| hand shower Tempesta 110 (27 597) | |
| wall shower holder adjustable (27 595) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE Water Saving Plus - extra efficient water usage, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages | |
| caused by shower falling | |
| maximum flow rate (at 3 bar): 5.6 l/min | |
| minimum pressure 1.0 bar | |
| suitable for instantaneous heater | |
| professional edition | |
| 27 601 003 | chrome |
| ditto, maximum flow rate (at 3 bar): 7.4 l/min | |

GROHE TEMPESTA

Ref. no. Colour



26 920 003 chrome

Tempesta 110

Wall holder set 3 sprays (Rain, Jet, Massage)

consisting of:

hand shower Tempesta 110 (28 419)

wall shower holder Tempesta, non-adjustable (28 605)

shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages


caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

minimum pressure 1.0 bar

suitable for instantaneous heater

professional edition

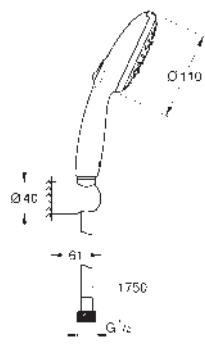

26 639 003 chrome

Tempesta 110

Wall holder set 3 sprays (Rain, Jet, Massage)

consisting of:

hand shower Tempesta 110 (28 419)

wall shower holder Tempesta, non-adjustable (28 605)

Relexaflex hose 1750 mm 1/2" x 1/2" (28 154)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages


caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

minimum pressure 1.0 bar

suitable for instantaneous heater

professional edition

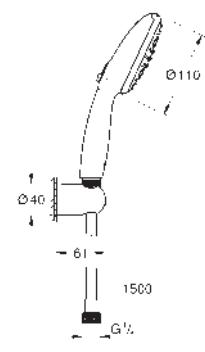

27 803 30E chrome

Tempesta 110

Wall holder set 2 sprays (Rain, Jet)

consisting of:

hand shower Tempesta 110 (27 597)

wall shower holder Tempesta, non-adjustable (28 605)

shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151)

GROHE Water Saving Plus - extra efficient water usage, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages

caused by shower falling

maximum flow rate (at 3 bar): 5.6 l/min


minimum pressure 1.0 bar

suitable for instantaneous heater


professional edition

GROHE TEMPESTA

Ref. no. Colour




27 799 30E chrome
Tempesta 110
Wall holder set 2 sprays (Rain, Jet)
 consisting of:
 hand shower Tempesta 110 (27 597)
 wall shower holder Tempesta, non-adjustable (28 605)
 Reflexaflex hose 1250 mm 1/2" x 1/2" (28 150)
GROHE Water Saving Plus - extra efficient water usage, perfect flow
GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide - inner insulation for surface and scalding protection
ShockProof silicone ring prevents damages caused by shower falling
 maximum flow rate (at 3 bar): 5.6 l/min
 minimum pressure 1.0 bar
 suitable for instantaneous heater
 professional edition



26 164 003 chrome
26 164 2433 matte black
 ditto, maximum flow rate (at 3 bar): 7.4 l/min

26 921 003 chrome
Tempesta 110
Wall holder set 2 sprays (Rain, Jet)
 with integrated wall union 1/2"
 consisting of:
 hand shower Tempesta 110 (26 912)
 shower outlet elbow 1/2" with wall shower holder (28 679)
 male thread
 protected against backflow
 shower hose Reflexaflex 1500 mm 1/2" x 1/2" (28 151)
GROHE Water Saving - Less water, perfect flow
GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide - inner insulation for surface and scalding protection
ShockProof silicone ring prevents damages caused by shower falling
 maximum flow rate (at 3 bar): 6.1 l/min
 minimum pressure 1.0 bar
 suitable for instantaneous heater
 professional edition



26 406 003 chrome
26 406 2433 matte black
Tempesta 110
Wall holder set 2 sprays (Rain, Jet)
 consisting of:
 hand shower Tempesta 110 (26 161)
 shower outlet elbow 1/2" with wall shower holder (28 679)
 male thread
 protected against backflow
 shower hose Reflexaflex 1500 mm 1/2" x 1/2" (28 151)
GROHE Water Saving - Less water, perfect flow
GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option
GROHE DreamSpray perfect spray pattern
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide - inner insulation for surface and scalding protection
ShockProof silicone ring prevents damages caused by shower falling
 maximum flow rate (at 3 bar): 7.4 l/min
 minimum pressure 1.0 bar
 suitable for instantaneous heater
 professional edition

GROHE TEMPESTA CUBE

Ref. no. Colour




| | |
|---|--------|
| 27 574 003 | chrome |
| Tempesta Cube 110 | |
| Hand shower 3 sprays | |
| Rain, Jet, Massage | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| universal mounting system, fitting all standard shower hoses | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| minimum pressure 1.0 bar | |
| suitable for instantaneous heater | |
| professional edition | |



| | |
|---|--------|
| 27 571 30E | chrome |
| Tempesta Cube 110 | |
| Hand shower 2 sprays | |
| spray patterns: | |
| Rain, Jet | |
| GROHE Water Saving Plus - extra efficient water usage, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| universal mounting system, fitting all standard shower hoses | |
| maximum flow rate (at 3 bar): 5.6 l/min | |
| minimum pressure 1.0 bar | |
| suitable for instantaneous heater | |
| professional edition | |

| | |
|--|-------------|
| 26 902 003 | chrome |
| 26 902 2433 | matte black |
| ditto, maximum flow rate (at 3 bar): 6.1 l/min | |

| | |
|--|-------------|
| 26 746 003 | chrome |
| 26 746 2433 | matte black |
| ditto, maximum flow rate (at 3 bar): 7.4 l/min | |




| | |
|---|--------|
| 27 576 003 | chrome |
| Tempesta Cube 110 | |
| Shower rail set 3 sprays (Rain, Jet, Massage) | |
| hand shower Tempesta Cube 110 (27 574) | |
| shower rail, 600 mm (27 523) | |
| Relexaflex hose 1750 mm 1/2"x1/2" (28 154) | |
| GROHE EasyReach tray (26 770) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| suitable for instantaneous heater | |
| professional edition | |

GROHE TEMPESTA CUBE

Ref. no.

Colour



26 907 003

chrome

Tempesta Cube 110

Shower rail set 2 sprays (Rain, Jet)
hand shower Tempesta Cube 110 (26 746)
shower rail, 600 mm (27 523)

Relexaflex hose 1750 mm 1/2"x1/2" (28 154)

GROHE EasyReach tray (26 770)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation (adjustable upper bracket for existing drill holes)
adjustable glider (turn and glide shower holder)

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection


ShockProof silicone ring prevents damages

caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

suitable for instantaneous heater

professional edition



27 579 003

chrome

Tempesta Cube 110

Shower rail set 3 sprays (Rain, Jet, Massage)
hand shower Tempesta Cube 110 (27 574)
shower rail, 600 mm (27 523)

Relexaflex hose 1750 mm 1/2"x1/2" (28 154)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation (adjustable upper bracket for existing drill holes)
adjustable glider (turn and glide shower holder)

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection


ShockProof silicone ring prevents damages

caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

suitable for instantaneous heater

professional edition



26 748 003

chrome

26 748 2433

matte black

Tempesta Cube 110

Shower rail set 2 sprays (Rain, Jet)
hand shower Tempesta Cube 110 (26 746)
shower rail, 600 mm (27 523)

Relexaflex hose 1750 mm 1/2"x1/2" (28 154)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

GROHE FastFixation (adjustable upper bracket for existing drill holes)
adjustable glider (turn and glide shower holder)

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages

caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

suitable for instantaneous heater

professional edition


27 578 30E

chrome

ditto, maximum flow rate (at 3 bar): 5.6 l/min


GROHE TEMPESTA CUBE

Ref. no. Colour




| | |
|---|--------|
| 26 904 003 | chrome |
| Tempesta Cube 110 | |
| Shower rail set 2 sprays (Rain, Jet) | |
| hand shower Tempesta Cube 110 (26 746) | |
| shower rail, 600 mm (27 523) | |
| metal shower hose Relexaflex 1750 mm 1/2" x 1/2" (28 139) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| suitable for instantaneous heater | |
| professional edition | |

| | |
|--|--------|
| 26 905 003 | chrome |
| ditto, maximum flow rate (at 3 bar): 6.1 l/min | |



| | |
|---|--------|
| 26 909 003 | chrome |
| Tempesta Cube 110 | |
| Shower rail set 3 sprays (Rain, Jet, Massage) | |
| hand shower Tempesta Cube 110 (27 574) | |
| shower rail, 900 mm (27 524) | |
| Relexaflex hose 1750 mm 1/2" x 1/2" (28 154) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| suitable for instantaneous heater | |
| professional edition | |




| | |
|---|-------------|
| 26 908 003 | chrome |
| 26 908 2433 | matte black |
| Tempesta Cube 110 | |
| Shower rail set 2 sprays (Rain, Jet) | |
| hand shower Tempesta Cube 110 (26 746) | |
| shower rail, 900 mm (27 524) | |
| Relexaflex hose 1750 mm 1/2" x 1/2" (28 154) | |
| GROHE Water Saving - Less water, perfect flow | |
| GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option | |
| GROHE DreamSpray perfect spray pattern | |
| GROHE Long-Life finish | |
| GROHE FastFixation (adjustable upper bracket for existing drill holes) | |
| adjustable glider (turn and glide shower holder) | |
| SpeedClean anti-lime system | |
| Inner WaterGuide - inner insulation for surface and scalding protection | |
| ShockProof silicone ring prevents damages caused by shower falling | |
| maximum flow rate (at 3 bar): 7.4 l/min | |
| suitable for instantaneous heater | |
| professional edition | |

GROHE TEMPESTA CUBE

Ref. no.

Colour



27 584 003

chrome

Tempesta Cube 110

Wall holder set 3 sprays (Rain, Jet, Massage)

consisting of:

hand shower Tempesta Cube 110 (27 574)

wall shower holder adjustable (27 595)

Relexaflex hose 1750 mm 1/2" x 1/2" (28 154)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages


caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

minimum pressure 1.0 bar

suitable for instantaneous heater

professional edition



27 588 003

chrome

Tempesta Cube 110

Wall holder set 3 sprays (Rain, Jet, Massage)

consisting of:

hand shower Tempesta Cube 110 (27 574)

wall shower holder Tempesta, non-adjustable (28 605)

shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages


caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

minimum pressure 1.0 bar

suitable for instantaneous heater

professional edition



26 910 003

chrome

Tempesta Cube 110

Wall holder set 3 sprays (Rain, Jet, Massage)

with integrated wall union 1/2"

consisting of:

hand shower Tempesta Cube 110 (27 574)

shower outlet elbow 1/2" with wall shower holder (28 679)

male thread

protected against backflow

shower hose Relexaflex 1500 mm 1/2" x 1/2" (28 151)

GROHE Water Saving - Less water, perfect flow

GROHE SmartSwitch - easily rotate the dial to enjoy your preferred spray option

GROHE DreamSpray perfect spray pattern

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide - inner insulation for surface and scalding protection

ShockProof silicone ring prevents damages


caused by shower falling

maximum flow rate (at 3 bar): 7.4 l/min

minimum pressure 1.0 bar

suitable for instantaneous heater

professional edition



27 523 001

chrome

27 523 2431

matte black

Tempesta

Shower rail, 600 mm



with wall brackets, glider and swivel holder

GROHE Long-Life finish

GROHE FastFixation (adjustable upper bracket for existing drill holes)

adjustable glider (turn and glide shower holder)


GROHE TEMPESTA CUBE
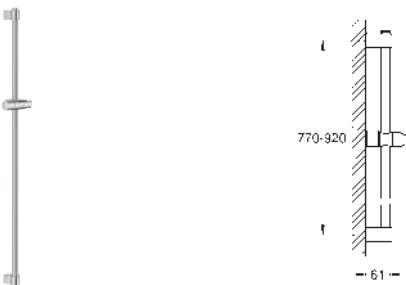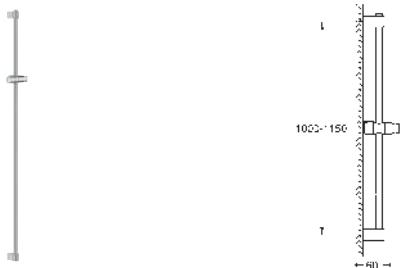
| | Ref. no. | Colour |
|---|--|-----------------------|
|  | 27 524 001 27 524 2431 Tempesta Shower rail, 900 mm with wall brackets, glider and swivel holder GROHE Long-Life finish GROHE FastFixation (adjustable upper bracket for existing drill holes) adjustable glider (turn and glide shower holder) | chrome matte black |
|  | 26 971 001 Tempesta Shower rail, 1150 mm with wall brackets, glider and swivel holder GROHE Long-Life finish GROHE FastFixation (adjustable upper bracket for existing drill holes) adjustable glider (turn and glide shower holder) | chrome |

GROHE TEMPESTA-F TRIGGER SPRAYS

Ref. no.

Colour



27 512 001 chrome

Tempesta-F
Hand shower 1 spray
with trigger control


maximum flow rate (at 3 bar): 8 l/min

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses
Please refer to local norms regarding installation.



28 020 L01 white

Tempesta-F
Hand shower 1 spray


with trigger control
maximum flow rate (at 3 bar): 8 l/min

GROHE Long-Life finish

SpeedClean anti-lime system

Inner WaterGuide for a longer life

universal mounting system, fitting all standard shower hoses
Please refer to local norms regarding installation.



26 353 000 chrome

Tempesta-F
Wall holder set 1 spray
hand shower with trigger control (27 512)

maximum flow rate (at 3 bar): 8 l/min

wall shower holder (28 605)

Silverflex Long-Life shower hose 1500 mm (26 346)

GROHE Long-Life finish

SpeedClean anti-lime system


Inner WaterGuide for a longer life

TwistStop to prevent hose from twisting

Please refer to local norms regarding installation.

- | | |
|--------------------------|-----------------------|
| 27 513 001 | chrome |
| 27 513 DC1 | supersteel |
| 27 513 GL1 | cool sunrise |
| 27 513 GN1 | brushed cool sunrise |
| 27 513 DA1 | warm sunset |
| 27 513 DL1 | brushed warm sunset |
| 27 513 A01 | hard graphite |
| 27 513 AL1 | brushed hard graphite |
| ditto, with 1250 mm hose | |

26 352 000 chrome
ditto, with 1000 mm hose




102530 243 1 matte black

Tempesta-F
Wall holder set 1 spray
hand shower with trigger control
wall shower holder
Silverflex Long-Life shower hose 1250 mm
GROHE Water Saving 5.7 l/min. flow limiter
GROHE Water Saving - Less water, perfect flow
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
Please refer to local norms regarding installation.


GROHE TEMPESTA-F TRIGGER SPRAYS

Ref. no.


Colour




26 354 000 chrome
Tempesta-F
Wall holder set 1 spray
hand shower with trigger control (27 512)
maximum flow rate (at 3 bar): 8 l/min
wall shower holder (28 605)
metal shower hose 1250 mm
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
Please refer to local norms regarding installation.



27 812 IL1 chrome/white
Tempesta-F
Wall holder set 1 spray
hand shower with trigger control (28 020)
maximum flow rate (at 3 bar): 8 l/min
wall shower holder (28 605)
Silverflex Long-Life shower hose 1250 mm (26 335)
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
Please refer to local norms regarding installation.




26 356 ILO chrome/white
Tempesta-F
Wall holder set 1 spray
hand shower with trigger control
maximum flow rate (at 3 bar): 8 l/min
wall shower holder (28 605)
Relexaflex Metal Long-Life shower hose 1250 mm
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
Please refer to local norms regarding installation.



26 357 000 chrome
Tempesta-F
Wall holder set with angle valve 1 spray
hand shower with trigger control (27 512)
maximum flow rate (at 3 bar): 7 l/min
wall shower holder (28 605)
Silverflex Long-Life shower hose 1500 mm (26 346)
angle valve 1/2" (22 958)
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
Please refer to local norms regarding installation.


27 514 001 chrome
ditto, with 1250 mm hose



26 358 000 chrome
Tempesta-F
Wall holder set with self-closing angle valve, 1 spray
hand shower with trigger control (27 512)
maximum flow rate (at 3 bar): 7 l/min
valve with integrated shower holder (26 333)
Silverflex Long-Life shower hose 1000 mm (26 334)
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
SpeedClean anti-lime system
Inner WaterGuide for a longer life
TwistStop to prevent hose from twisting
Please refer to local norms regarding installation.


GROHE SHOWER HOSES

Ref. no. Colour



28 025 001 chrome

Rotaflex Metal Long-Life
Metal hose
1750 mm
material: metal
Rotation cone for TwistStop function
GROHE Long-Life strengthened model
pressure resistance up to 16 bar
tensile strength 500 N
heat resistance 75°C
AntiFold bendproof
universal connection G 1/2" x 1/2"
GROHE ProGrip with knurl structure
Cone with silicone tape
to prevent the turning
of the hand shower during the usage
GROHE Long-Life finish




28 145 001 chrome

Relexaflex Metal Long-Life
Metal hose
2000 mm
material: metal
GROHE Long-Life strengthened model
pressure resistance up to 16 bar
tensile strength 750 N
heat resistance 75°C
AntiFold bendproof
universal connection G 1/2" x 1/2"
GROHE ProGrip with knurl structure
GROHE Long-Life finish

28 143 001 chrome
28 143 LS1 moon white
28 143 KS1 velvet black
ditto, 1500 mm

28 142 002 chrome
ditto, 1250 mm



28 140 001 chrome

Relexaflex Metal
Metal hose
2000 mm
material: metal
pressure resistance up to 5 bar
tensile strength 500 N
heat resistance 70°C
AntiFold bendproof
universal connection G 1/2" x 1/2"
GROHE ProGrip with knurl structure
GROHE Long-Life finish

28 139 001 chrome
ditto, 1750 mm

28 105 001 chrome
ditto, 1500 mm

GROHE SHOWER HOSES



Ref. no. Colour

| | |
|---|--------|
| 26 346 001 | chrome |
| Silverflex Long-Life Shower hose | |
| 1500 mm | |
| smooth surface for easy cleaning | |
| Rotation cone for TwistStop function | |
| GROHE Long-Life strengthened model | |
| pressure resistance up to 12 bar | |
| tensile strength 500 N | |
| heat resistance 75°C | |
| AntiFold bendproof | |
| universal connection G 1/2" x 1/2" | |
| GROHE ProGrip with knurl structure | |
| GROHE Long-Life finish | |

| | |
|----------------|--------|
| 26 335 001 | chrome |
| ditto, 1250 mm | |

| | |
|----------------|--------|
| 26 334 001 | chrome |
| ditto, 1000 mm | |




| | |
|---|--------|
| 27 137 001 | chrome |
| Silverflex | |
| Shower hose | |
| 2000 mm | |
| smooth surface for easy cleaning | |
| Rotation cone for TwistStop function | |
| pressure resistance up to 5 bar | |
| tensile strength 500 N | |
| heat resistance 70°C | |
| AntiFold bendproof | |
| universal connection G 1/2" x 1/2" | |
| GROHE ProGrip with knurl structure | |
| GROHE Long-Life finish | |

| | |
|----------------|--------|
| 28 388 001 | chrome |
| 28 388 DC1 | |
| 28 388 GL1 | |
| 28 388 DA1 | |
| 28 388 A01 | |
| 28 388 KF1 | |
| ditto, 1750 mm | |

| | |
|----------------|--------|
| 28 364 001 | chrome |
| ditto, 1500 mm | |

| | |
|----------------|--------|
| 28 362 001 | chrome |
| 28 362 DC1 | |
| 28 362 GL1 | |
| 28 362 DA1 | |
| 28 362 A01 | |
| 28 362 KF1 | |
| ditto, 1250 mm | |



| | |
|---|--------|
| 28 413 002 | chrome |
| Rotaflex | |
| Shower hose | |
| 2000 mm | |
| smooth surface for easy cleaning | |
| Rotation cone for TwistStop function | |
| pressure resistance up to 5 bar | |
| tensile strength 500 N | |
| heat resistance 70°C | |
| AntiFold bendproof | |
| universal connection G 1/2" x 1/2" | |
| GROHE ProGrip with knurl structure | |
| GROHE Long-Life finish | |

| | |
|----------------|--------|
| 28 410 002 | chrome |
| ditto, 1750 mm | |

| | |
|----------------|--------|
| 28 409 002 | chrome |
| ditto, 1500 mm | |

GROHE SHOWER HOSES

Ref. no. Colour



28 155 002 chrome


**Relexaflex
Shower hose**
2000 mm
smooth surface for easy cleaning
pressure resistance up to 5 bar
tensile strength 500 N
heat resistance 70°C
AntiFold bendproof
universal connection G 1/2" x 1/2"
GROHE ProGrip with knurl structure
GROHE Long-Life finish

28 154 002 chrome
ditto, 1750 mm

28 151 002 chrome
ditto, 1500 mm

28 150 002 chrome
ditto, 1250 mm







22 115 000 chrome
ditto, 500 mm



28 158 001 chrome


Metal hose
2000 mm
1/2" x 3/8"
GROHE Long-Life finish

GROHE SHOWER ACCESSORIES

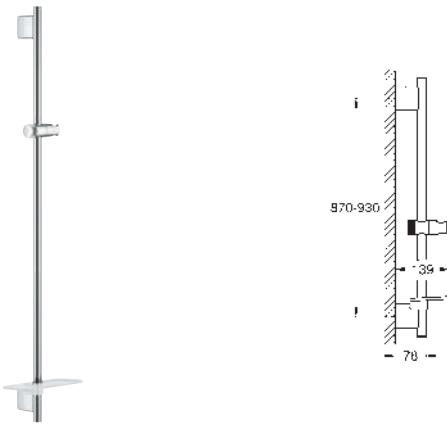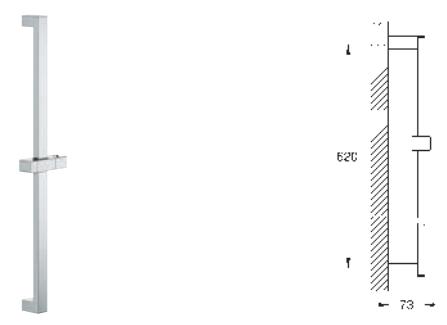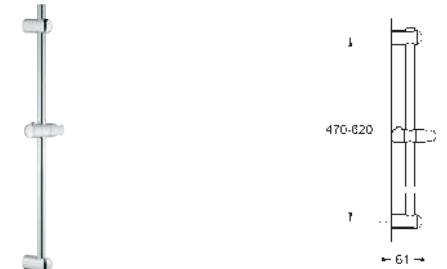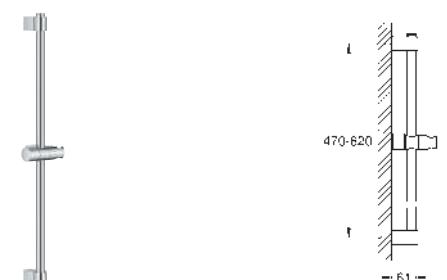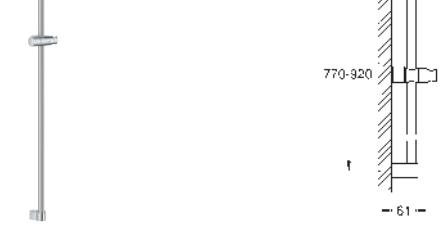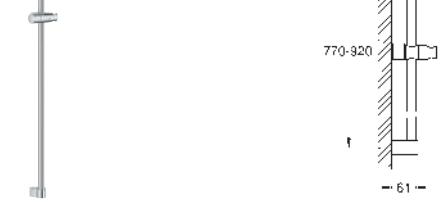
| | Ref. no. | Colour |
|---|---|--|
|  | <p>26 603 000 26 603 DCO 26 603 GLO 26 603 GN0 26 603 DAO 26 603 DL0 26 603 A00 26 603 AL0</p> <p>Rainshower SmartActive Shower rail, 900 mm wall holders made of metal glide element and swivel holder, GROHE QuickFix Plus (adjustable distance between wall shower holders) GROHE TileFix adjustable depth on upper and lower bracket GROHE EasyReach tray GROHE Long-Life finish</p> | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | 22 125 KF0 ditto, Professional exclusive | phantom black |
|  | 26 602 000 ditto, 600 mm | chrome |
|  | <p>27 892 000 Euphoria Cube Shower rail, 600 mm with wall holders, glide element and swivel holder GROHE Long-Life finish</p> <p>27 840 000 ditto, 900 mm</p> | chrome chrome |
|  | <p>27 499 000 Euphoria Shower rail, 600 mm with wall holders, glide element and swivel holder GROHE FastFixation upper bracket adjustable GROHE Long-Life finish</p> <p>27 500 000 ditto, 900 mm</p> | chrome chrome |
|  | <p>27 523 001 27 523 2431 Tempesta Shower rail, 600 mm with wall brackets, glider and swivel holder GROHE Long-Life finish GROHE FastFixation (adjustable upper bracket for existing drill holes) adjustable glider (turn and glide shower holder)</p> | chrome matte black |
|  | <p>27 524 001 27 524 2431 Tempesta Shower rail, 900 mm with wall brackets, glider and swivel holder GROHE Long-Life finish GROHE FastFixation (adjustable upper bracket for existing drill holes) adjustable glider (turn and glide shower holder)</p> | chrome matte black |

GROHE SHOWER ACCESSORIES


Ref. no. Colour




26 971 001 chrome
Tempesta
Shower rail, 1150 mm
with wall brackets, glider and swivel holder
GROHE Long-Life finish
GROHE FastFixation (adjustable upper bracket for existing drill holes)
adjustable glider (turn and glide shower holder)




27 055 000 chrome
Rainshower
Wall hand shower holder
adjustable
GROHE Long-Life finish



27 595 001 chrome
27 595 2431 matte black
Tempesta
Wall hand shower holder
adjustable
GROHE Long-Life finish
professional edition



27 056 000 chrome
Rainshower
Wall hand shower holder
not adjustable
without escutcheon
GROHE Long-Life finish



27 074 000 chrome
27 074 DC0 supersteel
27 074 GLO cool sunrise
27 074 GNO brushed cool sunrise
27 074 DAO warm sunset
27 074 DLO brushed warm sunset
27 074 A00 hard graphite
27 074 AL0 brushed hard graphite


Rainshower
Wall hand shower holder
not adjustable
with round escutcheon
GROHE Long-Life finish

22 117 KF0 phantom black
ditto, Professional exclusive

GROHE SHOWER ACCESSORIES

| | Ref. no. | Colour |
|---|--|--|
|  | 28 671 001 Tempesta Wall union shower outlet elbow 1/2" male thread GROHE Long-Life finish professional edition | chrome |
|  | 27 075 000 27 075 DC0 27 075 DA0 27 075 DL0 27 075 GL0 27 075 GN0 27 075 A00 27 075 AL0 Rainshower Wall hand shower holder not adjustable with square escutcheon GROHE Long-Life finish | chrome supersteel warm sunset brushed warm sunset cool sunrise brushed cool sunrise hard graphite brushed hard graphite |
|  | 27 693 000 Euphoria Cube Wall hand shower holder not adjustable GROHE Long-Life finish | chrome |
|  | 28 605 001 Tempesta Wall hand shower holder not adjustable GROHE Long-Life finish professional edition | chrome |

GROHE SHOWER ACCESSORIES



Ref. no.


Colour

| | |
|------------|-----------------------|
| 27 057 000 | chrome |
| 27 057 DCO | supersteel |
| 27 057 GLO | cool sunrise |
| 27 057 GN0 | brushed cool sunrise |
| 27 057 DAO | warm sunset |
| 27 057 DL0 | brushed warm sunset |
| 27 057 A00 | hard graphite |
| 27 057 AL0 | brushed hard graphite |

Rainshower

Shower outlet elbow 1/2"
male connection thread 1/2"
with round escutcheon
protected against backflow
GROHE Long-Life finish


22 118 KF0 phantom black
ditto, Professional exclusive



| | |
|------------|-----------------------|
| 27 076 000 | chrome |
| 27 076 DCO | supersteel |
| 27 076 GLO | cool sunrise |
| 27 076 GN0 | brushed cool sunrise |
| 27 076 DAO | warm sunset |
| 27 076 DL0 | brushed warm sunset |
| 27 076 A00 | hard graphite |
| 27 076 AL0 | brushed hard graphite |


Rainshower

Shower outlet elbow
male connection thread 1/2"
with square escutcheon
protected against backflow
GROHE Long-Life finish



27 704 000 chrome

Euphoria Cube
Shower outlet elbow 1/2"
male thread
protected against backflow
GROHE Long-Life finish




| | |
|------------|-----------------------|
| 26 658 000 | chrome |
| 26 658 DCO | supersteel |
| 26 658 GLO | cool sunrise |
| 26 658 GN0 | brushed cool sunrise |
| 26 658 DAO | warm sunset |
| 26 658 DL0 | brushed warm sunset |
| 26 658 A00 | hard graphite |
| 26 658 AL0 | brushed hard graphite |

Rainshower

Shower outlet elbow 1/2" with holder
with round escutcheon
Ø 48 mm
male connection thread 1/2"
metal body
protected against backflow
GROHE Long-Life finish

GROHE SHOWER ACCESSORIES




Ref. no.

Colour


| | |
|------------|-----------------------|
| 26 659 000 | chrome |
| 26 659 DC0 | supersteel |
| 26 659 GL0 | cool sunrise |
| 26 659 GN0 | brushed cool sunrise |
| 26 659 DAO | warm sunset |
| 26 659 DL0 | brushed warm sunset |
| 26 659 A00 | hard graphite |
| 26 659 AL0 | brushed hard graphite |

Rainshower
Shower outlet elbow 1/2" with holder
with square escutcheon
48 x 48 mm
male connection thread 1/2"
metal body
protected against backflow
GROHE Long-Life finish




| | |
|------------|-----------------------|
| 26 370 000 | chrome |
| 26 370 DC0 | supersteel |
| 26 370 GL0 | cool sunrise |
| 26 370 GN0 | brushed cool sunrise |
| 26 370 DAO | warm sunset |
| 26 370 DL0 | brushed warm sunset |
| 26 370 A00 | hard graphite |
| 26 370 AL0 | brushed hard graphite |

Euphoria Cube
Shower outlet elbow 1/2"
with wall shower holder
male connection thread 1/2"
protected against backflow
GROHE Long-Life finish




12 435 000 chrome

Relexa Plus
Glider with metal sleeve
for shower rail 28 620/28 621
Ø 28 mm
angle of inclination adjustable
by click stop device
height adjustment
GROHE Long-Life finish



28 628 001 chrome
28 628 2431 matte black

Tempesta
Wall union
shower outlet elbow 1/2"
with wall shower holder
male thread
GROHE Long-Life finish
professional edition




27 206 000

Soap dish
transparent
surface in parts with eroded structure
for shower rail Ø 22 or 25 mm

GROHE SHOWER ACCESSORIES

Ref. no.


Colour




27 596 000
GROHE EasyReach tray
acrylic
for Tempesta and Euphoria
shower rails Ø 22 mm




27 845 000 chrome
Euphoria Cube Compensation disc
for Euphoria Cube shower bars 27 892 000 / 27 841 000




45 914 XE0 gray night time
Compensation disc
not stackable



45 459 000 chrome
Compensation disc
for shower rail 28 620/28 621
stackable



48 543 001
Tempesta Compensation disc
for Tempesta shower rails
27 523 001 / 27 524 001 / 26 971 001
stackable



26 385 000 chrome
Rainshower SmartControl Compensation disc
for Rainshower SmartControl systems
26 250, 26 361, 26 379
stackable

GROHE KITCHEN FITTINGS






CONTENTS

| | | |
|------------------|--|-----|
| Water systems | GROHE Blue Professional | 332 |
| | GROHE Blue Home | 336 |
| | GROHE Blue Pure | 342 |
| | GROHE Blue accessories | 344 |
| | GROHE Red | 347 |
| Premium lines | K7 | 350 |
| | Zedra / Zedra SmartControl / Zedra Touch | 351 |
| | Essence | 353 |
| | Minta / Minta SmartControl / Minta Touch | 356 |
| | Eurocube | 360 |
| Competence lines | Eurodisc Cosmopolitan | 361 |
| | Concetto | 362 |
| | Eurocosmo | 364 |
| | Eurosmart | 365 |
| | Costa | 368 |
| | Bau Lines | 369 |
| Kitchen sinks | Kitchen accessories | 371 |
| | Stainless steel sinks | 373 |
| | Composite sinks | 382 |
| | Kitchen sink accessories | 389 |

GROHE BLUE PROFESSIONAL

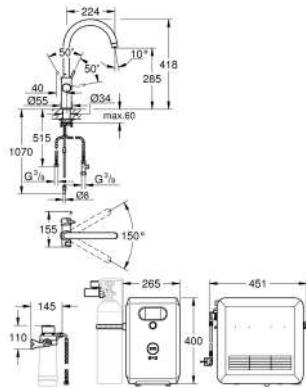

Ref. no.

Colour

31 323 002
31 323 DC2

chrome
supersteel

GROHE Blue Professional

C-spout kit

GROHE Blue single-lever sink mixer with filter function
push buttons for 3 types of filtered and chilled table water
still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge
swivel tubular spout, swivel area 150°
separate inner water ways for filtered and non-filtered water
flexible connection hoses

GROHE Blue Professional cooler

delivers 12 liters of chilled sparkling water per hour
270 Watt cooling unit, 230 V, 50 Hz
type of protection IP 21, CE approved
requires ventilation holes in the bottom of the kitchen cabinet
software set-up, monitoring of filter and CO2 capacity via
GROHE Watersystems app
cleaning cartridge adapter, for use with GROHE Blue cleaning cartridge
40 434 001

CO₂ pressure indicator

GROHE Blue filter, CO₂ bottle and cleaning cartridge are not included and have to be ordered separately

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android


smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

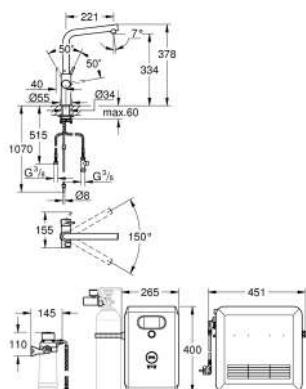

31 347 003
31 347 DC3

chrome
supersteel

GROHE Blue Professional

L-spout kit

GROHE Blue single-lever sink mixer with filter function
push buttons for 3 types of filtered and chilled table water
still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge
swivel tubular spout, swivel area 150°
separate inner water ways for filtered and non-filtered water
flexible connection hoses

GROHE Blue Professional cooler

delivers 12 liters of chilled sparkling water per hour
270 Watt cooling unit, 230 V, 50 Hz
type of protection IP 21, CE approved
requires ventilation holes in the bottom of the kitchen cabinet
software set-up, monitoring of filter and CO2 capacity via
GROHE Watersystems app
cleaning cartridge adapter, for use with GROHE Blue cleaning cartridge
40 434 001

CO₂ pressure indicator

GROHE Blue filter, CO₂ bottle and cleaning cartridge are not included and have to be ordered separately

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android


smart phone with Android 10.0 or higher
Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

GROHE BLUE PROFESSIONAL

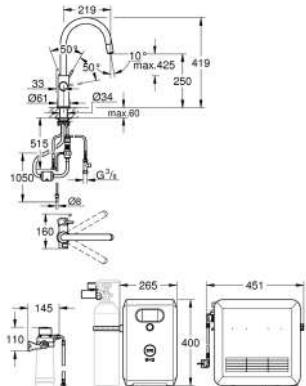

Ref. no.

Colour

31 325 002
31 325 DC2

chrome
supersteel

GROHE Blue Professional

C-spout kit with pull-out mousseur

GROHE Blue single-lever sink mixer with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

pull out mousseur spout

swivel tubular spout, swivel area 360° separate inner water ways for filtered and non-filtered water flexible connection hoses

GROHE Blue Professional cooler

delivers 12 liters of chilled sparkling water per hour

270 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved requires ventilation holes in the bottom of the kitchen cabinet software set-up, monitoring of filter and CO₂ capacity via GROHE Watersystems app cleaning cartridge adapter, for use with GROHE Blue cleaning cartridge 40 434 001

CO₂ pressure indicator

GROHE Blue filter, CO₂ bottle and cleaning cartridge are not included and have to be ordered separately

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android


smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

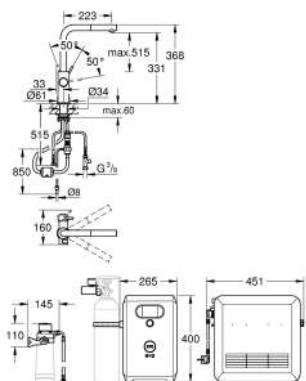

31 326 002
31 326 DC2

chrome
supersteel

GROHE Blue Professional

L-spout kit with pull-out mousseur

GROHE Blue single-lever sink mixer with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

pull out mousseur spout

swivel tubular spout, swivel area 360° separate inner water ways for filtered and non-filtered water flexible connection hoses

GROHE Blue Professional cooler

delivers 12 liters of chilled sparkling water per hour

270 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved requires ventilation holes in the bottom of the kitchen cabinet software set-up, monitoring of filter and CO₂ capacity via GROHE Watersystems app cleaning cartridge adapter, for use with GROHE Blue cleaning cartridge 40 434 001

CO₂ pressure indicator

GROHE Blue filter, CO₂ bottle and cleaning cartridge are not included and have to be ordered separately

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher


Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.


GROHE BLUE PROFESSIONAL



Ref. no.

Colour

| | |
|--|------------|
| 31 302 002 | chrome |
| 31 302 DC2 | supersteel |
| GROHE Blue Professional C-spout kit with Mono faucet | |
| GROHE Blue Mono faucet with filter function | |
| push buttons for 3 types of filtered and chilled table water still, medium, sparkling | |
| GROHE Long-Life finish | |
| swivel tubular spout, swivel area 150° | |
| GROHE Blue Professional cooler | |
| delivers 12 liters of chilled sparkling water per hour | |
| 270 Watt cooling unit, 230 V, 50 Hz | |
| type of protection IP 21, CE approved | |
| requires ventilation holes in the bottom of the kitchen cabinet | |
| software set-up, monitoring of filter and CO2 capacity via | |
| GROHE Watersystems app | |
| cleaning cartridge adapter, for use with GROHE Blue cleaning cartridge | |
| 40 434 001 | |
| CO2 pressure indicator | |
| GROHE Blue filter, CO2 bottle and cleaning cartridge are not included and have to be ordered separately | |
| System requirements Apple | |
| iPhone with iOS 14.0 or higher | |
| System requirements Android | |
| smart phone with Android 10.0 or higher | |
| Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store. | |
| * The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners. | |
| ** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards. | |
| *** Available for free via iTunes app or Google Play store. | |



40 554 002

GROHE Blue Professional Chiller and carbonizer

delivers 12 liters of chilled water per hour
colour display with push and turn control
270 Watt cooling unit, 230 V, 50 Hz
type of protection IP 21
CE approved

requires ventilation holes in the bottom of the kitchen cabinet
software set-up, monitoring of filter and CO2 capacity via
GROHE Watersystems app
push notifications at low filter resp. CO2 capacity
additional monitoring via GROHE Blue Professional Browser-Monitor possible
with Bluetooth 4.0* and WIFI interface for wireless data communication
for Apple** and Android devices
bluetooth range (max. 10 m) varies on used materials and walls between
transmitter and receiver
compatible only with GROHE Blue faucets with push button operation

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

This product includes an article which is declared as a hazardous substance.
Find more information in the safety data sheet. You can download the safety data at: www.grohe.com/safety-data-sheets/

GROHE BLUE PROFESSIONAL

Ref. no.

Colour




48 481 000

**GROHE Blue Professional
Adapter cable**

to connect old GROHE Blue Professional faucets produced until 12/2018 to new
GROHE Blue Professional cooler and carbonisator produced since 01/2019
length 1000 mm

GROHE BLUE HOME



Ref. no.

Colour

| | |
|------------|-----------------------|
| 31 455 001 | chrome |
| 31 455 DC1 | supersteel |
| 31 455 DL1 | brushed warm sunset |
| 31 455 AL1 | brushed hard graphite |

GROHE Blue Home

C-spout Starter kit

GROHE Blue Home single-lever sink mixer with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge swivel tubular spout, swivel area 150° separate inner water ways for filtered and non-filtered water flexible connection hoses

GROHE Blue Home cooler

delivers 3 liters of chilled sparkling water per hour 180 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved requires ventilation holes in the bottom of the kitchen cabinet software set-up, monitoring of filter and CO₂ capacity via GROHE Watersystems app

push notifications at low filter resp. CO₂ capacity **GROHE Blue** filter S-Size and filter head with flexible water hardness adjustment for regions with water hardness of more than 9° dKH compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue 425 g CO₂ bottle

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

31 455 KS1

velvet black

ditto, Professional exclusive

31 545 001

chrome

GROHE Blue Home

C-spout Starter kit

GROHE Blue Home single-lever sink mixer with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge swivel tubular spout, swivel area 150°

separate inner water ways for filtered and non-filtered water flexible connection hoses

GROHE Blue Home cooler

delivers 3 liters of chilled sparkling water per hour

180 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved requires ventilation holes in the bottom of the kitchen cabinet software set-up, monitoring of filter and CO₂ capacity via GROHE Watersystems app

compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue Ultrasafe filter 3000 I and filter head

GROHE Blue 425 g CO₂ bottle

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android


smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.



GROHE BLUE HOME



Ref. no.

Colour

31 541 000 chrome
31 541 DCO supersteel

GROHE Blue Home

C-spout starter kit with pull-out mousseur

GROHE Blue Home single-lever sink mixer with filter function
push buttons for 3 types of filtered and chilled table water

still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

pull out mousseur spout

swivel tubular spout, swivel area 360°

separate inner water ways for filtered and non-filtered water

flexible connection hoses

GROHE Blue Home cooler

delivers 3 liters of chilled sparkling water per hour

180 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved

requires ventilation holes in the bottom of the kitchen cabinet

software set-up, monitoring of filter and CO₂ capacity via

GROHE Watersystems app

push notifications at low filter resp. CO₂ capacity

GROHE Blue filter S-Size and filter head with flexible water hardness adjustment for regions with water hardness of more than 9° dKH

compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue 425 g CO₂ bottle

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

31 541 KS0 velvet black
ditto, Professional exclusive

GROHE BLUE HOME

Ref. no.

Colour

GROHE Blue Home
L-spout Starter kit

GROHE Blue Home single-lever sink mixer with filter function
push buttons for 3 types of filtered and chilled table water
still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge
swivel tubular spout, swivel area 150°
separate inner water ways for filtered and non-filtered water
flexible connection hoses

GROHE Blue Home cooler
delivers 3 liters of chilled sparkling water per hour
180 Watt cooling unit, 230 V, 50 Hz
type of protection IP 21, CE approved
requires ventilation holes in the bottom of the kitchen cabinet
software set-up, monitoring of filter and CO₂ capacity via
GROHE Watersystems app
push notifications at low filter resp. CO₂ capacity

GROHE Blue filter S-Size and filter head with flexible water hardness adjustment
for regions with water hardness of more than 9° dKH
compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue 425 g CO₂ bottle


System requirements Apple
iPhone with iOS 14.0 or higher

System requirements Android
smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.



* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.



31 454 KS1 velvet black
ditto Professional exclusive

GROHE BLUE HOME



Ref. no.

Colour

31 539 000 chrome
31 539 DC0 supersteel

GROHE Blue Home

L-spout starter kit with pull-out mousseur

GROHE Blue Home single-lever sink mixer with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

pull out mousseur spout

swivel tubular spout, swivel area 360° separate inner water ways for filtered and non-filtered water flexible connection hoses

GROHE Blue Home cooler

delivers 3 liters of chilled sparkling water per hour

180 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved

requires ventilation holes in the bottom of the kitchen cabinet

software set-up, monitoring of filter and CO₂ capacity via

GROHE Watersystems app

push notifications at low filter resp. CO₂ capacity

GROHE Blue filter S-Size and filter head with flexible water hardness adjustment for regions with water hardness of more than 9° dKH compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue 425 g CO₂ bottle

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

31 539 KS0 velvet black
ditto, Professional exclusive

31 456 001 chrome
31 456 DC1 supersteel

GROHE Blue Home

U-spout Starter kit

GROHE Blue Home single-lever sink mixer with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

swivel tubular spout, swivel area 150°

separate inner water ways for filtered and non-filtered water flexible connection hoses

GROHE Blue Home cooler

delivers 3 liters of chilled sparkling water per hour

180 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved

requires ventilation holes in the bottom of the kitchen cabinet software set-up, monitoring of filter and CO₂ capacity via

GROHE Watersystems app

push notifications at low filter resp. CO₂ capacity

GROHE Blue filter S-Size and filter head with flexible water hardness adjustment for regions with water hardness of more than 9° dKH compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue 425 g CO₂ bottle

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher


Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

GROHE BLUE HOME



Ref. no.

Colour

31 543 000 chrome
31 543 DC0 supersteel

GROHE Blue Home

U-spout starter kit with pull-out mousseur

GROHE Blue Home single-lever sink mixer with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

pull out mousseur spout

swivel tubular spout, swivel area 360° separate inner water ways for filtered and non-filtered water flexible connection hoses

GROHE Blue Home cooler

delivers 3 liters of chilled sparkling water per hour

180 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved

requires ventilation holes in the bottom of the kitchen cabinet

software set-up, monitoring of filter and CO₂ capacity via

GROHE Watersystems app

push notifications at low filter resp. CO₂ capacity

GROHE Blue filter S-Size and filter head with flexible water hardness adjustment for regions with water hardness of more than 9° dKH compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue 425 g CO₂ bottle

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android


smart phone with Android 10.0 or higher

Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.



31 498 001 chrome
31 498 DC1 supersteel
31 498 DL1 brushed warm sunset
31 498 AL1 brushed hard graphite

GROHE Blue Home

C-spout starter kit with Mono faucet

GROHE Blue Home Mono faucet with filter function push buttons for 3 types of filtered and chilled table water still, medium, sparkling

GROHE Long-Life finish

swivel tubular spout, swivel area 150°

GROHE Blue Home cooler

delivers 3 liters of chilled sparkling water per hour

180 Watt cooling unit, 230 V, 50 Hz

type of protection IP 21, CE approved

requires ventilation holes in the bottom of the kitchen cabinet

software set-up, monitoring of filter and CO₂ capacity via

GROHE Watersystems app

push notifications at low filter resp. CO₂ capacity

GROHE Blue filter S-Size and filter head with flexible water hardness adjustment for regions with water hardness of more than 9° dKH compatible with GROHE Blue filter S-Size, M-Size, GROHE Blue activated carbon filter, GROHE Blue Ultrasafe filter and GROHE Blue magnesium+ filter

GROHE Blue 425 g CO₂ bottle

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher


Mobile devices and GROHE Watersystems app*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

GROHE BLUE HOME



Ref. no.

Colour

40 711 001

GROHE Blue Home Cooler

180 Watt cooling unit, 230 V, 50 Hz
delivers 3 liters of chilled sparkling water per hour

CE approved

requires ventilation holes in the bottom of the kitchen cabinet
software set-up, monitoring of filter and CO₂ capacity via

GROHE Watersystems app

with Bluetooth 4.0* and WIFI interface for wireless data communication
for Apple** and Android devices

bluetooth range (max. 10 m) varies on used materials and walls between
transmitter and receiver

adjustable for GROHE Blue filter S-Size, GROHE Blue activated
carbon filter and GROHE Blue magnesium + zinc filter

System requirements Apple

iPhone with iOS 14.0 or higher

System requirements Android

smart phone with Android 10.0 or higher


Mobile devices and GROHE Watersystems app*** are not included in delivery
and have to be ordered separately via an authorised Apple store/store/iTunes or
Google Play store.

* The Bluetooth word mark and logos are registered trademarks owned by
Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license.
Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of
Apple Inc., registered in the U.S. and other countries. Apple is not responsible for
the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

GROHE BLUE PURE



Ref. no.

Colour

30 580 000

chrome

GROHE Blue Pure BauCurve

Filter faucet

consisting of:

GROHE Blue single-lever sink mixer with filter function

single hole installation

C-spout

separate handle for filtered water

GROHE SilkMove 28 mm ceramic cartridge


swivel tubular spout

swivel area 150°

separate inner water ways for filtered and non-filtered water

flexible connection hoses

the faucet must be installed with a filter starter set of your choice



30 582 000

chrome

GROHE Blue Pure BauCurve

Starter kit with Ultrasafe filter

consisting of:

GROHE Blue single-lever sink mixer with filter function

single hole installation

C-spout

separate handle for filtered water

GROHE SilkMove 28 mm ceramic cartridge

swivel tubular spout

swivel area 150°

separate inner water ways for filtered and non-filtered water

flexible connection hoses

GROHE Blue filter head


GROHE Blue Ultrasafe filter retains microplastic > 1 µm, 99.999 % of bacteria and

99,5 % of lead

reduces substances responsible for taste and odor, e.g. chlorine

filter capacity 3000 l, the filter must be replaced after 6 months of use

flow meter for filter lifetime measurement including 2 x AA batteries



30 583 000

chrome
supersteel

GROHE Blue Pure Eurosmart

Filter faucet

consisting of:

GROHE Blue single-lever sink mixer with filter function

single hole installation

U spout

separate handle for filtered water

GROHE SilkMove 28 mm ceramic cartridge


swivel tubular spout

swivel area 150°

separate inner water ways for filtered and non-filtered water

flexible connection hoses

the faucet must be installed with a filter starter set of your choice



30 588 000

chrome

GROHE Blue Pure Minta

Filter faucet

consisting of:

GROHE Blue single-lever sink mixer with filter function

single hole installation

L-spout

separate handle for filtered water

GROHE SilkMove 28 mm ceramic cartridge

swivel tubular spout


swivel area 150°

separate inner water ways for filtered and non-filtered water

flexible connection hoses

the faucet must be installed with a filter starter set of your choice

GROHE BLUE PURE







Ref. no.

Colour

| | |
|---|---------------|
| 30 590 000 | chrome |
| 30 590 DCO | supersteel |
| 30 590 KFO | phantom black |
| GROHE Blue Pure Minta | |
| Filter faucet with pull-out mousseur | |
| consisting of: | |
| GROHE Blue single-lever sink mixer with filter function | |
| single hole installation | |
| L-spout | |
| pull out mousseur spout | |
| separate handle for filtered water | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| swivel tubular spout | |
| swivel area 360° | |
| separate inner water ways for filtered and non-filtered water | |
| flexible connection hoses | |
| the faucet must be installed with a filter starter set of your choice | |

GROHE BLUE ACCESSORIES

| | Ref. no. | Colour |
|--|--|---|
|   | 40 848 SD0 40 848 GN0 40 848 DL0 40 848 AL0 GROHE Blue Thermo drinking bottle stainless steel bottle with GROHE Blue decor double-walled lid with strap volume 450 ml | stainless steel brushed cool sunrise brushed warm sunset brushed hard graphite |
|   | 40 405 001 GROHE Blue Glass carafe with lid set crystal glass with GROHE Blue decor stainless steel lid with tilt lock with integrated sieve to hold back e.g. fruits plastic lid for closing BPA (Bisphenol A) free dishwasher safe volume 1.0 l | |
|   | 40 437 000 GROHE Blue Water glasses (6 pieces) crystal glasses with GROHE Blue decor dishwasher safe volume 250 ml | |
|   | 40 875 000 chrome GROHE Blue Magnesium + Zinc filter starter set consisting of: GROHE Blue filter head GROHE Blue Magnesium + zinc filter enriches water with up to 35 mg/l magnesium and up to 3 mg/l zinc reduces substances responsible for taste and odor, e.g. chlorine reduces limescale and heavy metals capacity 400 l at 17° dGH flow meter for filter lifetime measurement including 2 x AA batteries compatible with GROHE Blue Pure single faucets | |
|   | 40 876 000 chrome GROHE Blue Ultrasafe filter starter set consisting of: GROHE Blue filter head GROHE Blue Ultrasafe filter retains microplastic > 1 µm, 99.999 % of bacteria and 99,5 % of lead reduces substances responsible for taste and odor, e.g. chlorine filter capacity 3000 l, the filter must be replaced after 6 months of use flow meter for filter lifetime measurement including 2 x AA batteries compatible with GROHE Blue Pure single faucets | |

GROHE BLUE ACCESSORIES

Ref. no. Colour



40 404 001

**GROHE Blue
Filter S-Size**

BWT replacement filter for GROHE Blue and GROHE Red water systems
capacity 600 l at 20° dKH
reduces substances responsible for taste and odor, e.g. chlorine
reduces limescale and heavy metals
compatible with GROHE Blue Home, GROHE Blue Professional,
GROHE Blue Pure (only with flow meter) and GROHE Red

40 430 001

ditto, M-Size, capacity 1500 l at 20° dKh, 315 mm high

40 412 001


ditto, L-Size, capacity 2500 l at 20° dKh, 350 mm high



40 691 002

**GROHE Blue
Magnesium + Zinc filter**


BWT replacement filter for GROHE Blue and GROHE Red water systems
capacity 400 l at 17° dGH
enriches water with up to 35 mg/l magnesium and up to 3 mg/l zinc
reduces substances responsible for taste and odor, e.g. chlorine
reduces limescale and heavy metals
compatible with GROHE Blue Home, GROHE Blue Professional,
GROHE Blue Pure (only with flow meter) and GROHE Red



40 575 002

**GROHE Blue
UltraSafe filter**

BWT replacement filter for GROHE Blue water systems
filter capacity 3000 l, the filter must be replaced after 6 months of use
retains microplastic > 1 µm and 99,999 % of bacteria, removes lead by 99,5 %
reduces substances responsible for taste and odor, e.g. chlorine
Compatible with GROHE Blue Home, GROHE Blue Professional and
GROHE Blue Pure



40 434 001

chrome

**GROHE Blue
Cleaning cartridge**

for 100% disinfection and cleaning of the GROHE Blue cooler and filter head
including sprayhead
for use with GROHE Blue cleaning cartridge adapter 40 694 000, sold separately
This product is a hazardous substance. Find more information in the safety data sheet. You can download the safety data at: www.grohe.com/safety-data-sheets/



40 694 000

chrome




**GROHE Blue
cleaning cartridge adapter**

for GROHE Blue BWT Filterhead 64 508 001
for use with GROHE Blue cleaning cartridge 40 434 001, sold separately

GROHE BLUE ACCESSORIES

| | Ref. no. | Colour |
|---|--|--------|
|  | 40 849 000 GROHE Blue 425 g CO₂ bottle, empty refillable CO ₂ , 425 g bottle volume 1 bottle: 425 g, for up to 60 l of sparkling water Blue Professional 2 kg CO ₂ empty bottle: 40 424 040 | chrome |
|  | 46 717 000 Pressure indicator for GROHE Blue including adapters for 425 g and 2 kg CO ₂ bottles | |
|  | 40 962 000 GROHE Blue CO₂ adapter adapter for GROHE Blue Professional CO ₂ pressure reducer for use with 425 g CO ₂ bottles for GROHE Blue Professional systems as of January 2019 | |
|  | 40 843 000 GROHE Blue Extension set extension cable 5 m hose for drinking water, 5 m tube cutter adapters and clips suitable for GROHE Blue Home and GROHE Blue Professional | chrome |
|  | 48 481 000 GROHE Blue Professional Adapter cable to connect old GROHE Blue Professional faucets produced until 12/2018 to new GROHE Blue Professional cooler and carbonisator produced since 01/2019 length 1000 mm | |

GROHE RED




| Ref. no. | Colour |
|---|------------|
| 30 079 001 | chrome |
| 30 079 DC1 | supersteel |
| GROHE Red Duo | |
| Faucet and L size boiler | |
| GROHE Red Duo single-lever sink mixer | |
| C-spout | |
| GROHE ChildLock push buttons for boiling water | |
| TÜV certified triple electronic safeguards against accidental activation of boiling water | |
| GROHE Long-Life finish | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| insulated tubular spout, swivel area 150° | |
| separate water ways | |
| flexible connection hoses | |
| GROHE Red boiler L size | |
| 5.5 liter 100° C boiling water, 7 liter total capacity | |
| required inlet pressure: 1-7 bar | |
| with flexible connection hose and outlet for boiling water | |
| CE approved | |
| power supply 230 V 50 Hz | |
| power consumption 2100 W, standby power consumption 15 W | |
| energy efficiency class A | |
| GROHE Blue S-Size filter starter set | |
| for protection of the boiler from limescale | |
| capacity 600 l at 20° dKH, flow rate measuring unit | |

| 30 325 001 | chrome |
|---|------------|
| 30 325 DC1 | supersteel |
| GROHE Red Duo | |
| Faucet and L size boiler | |
| GROHE Red Duo single-lever sink mixer | |
| L-spout | |
| GROHE ChildLock push buttons for boiling water | |
| TÜV certified triple electronic safeguards against accidental activation of boiling water | |
| GROHE Long-Life finish | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| insulated tubular spout, swivel area 150° | |
| separate water ways | |
| flexible connection hoses | |
| GROHE Red boiler L size | |
| 5.5 liter 100° C boiling water, 7 liter total capacity | |
| required inlet pressure: 1-7 bar | |
| with flexible connection hose and outlet for boiling water | |
| CE approved | |
| power supply 230 V 50 Hz | |
| power consumption 2100 W, standby power consumption 15 W | |
| energy efficiency class A | |
| GROHE Blue S-Size filter starter set | |
| for protection of the boiler from limescale | |
| capacity 600 l at 20° dKH, flow rate measuring unit | |

| 30 083 001 | chrome |
|---|-----------------------|
| 30 083 DC1 | supersteel |
| 30 083 AL1 | brushed hard graphite |
| 30 083 KS1 | velvet black |
| GROHE Red Duo | |
| Faucet and M size boiler | |
| GROHE Red Duo single-lever sink mixer | |
| C-spout | |
| GROHE ChildLock push buttons for boiling water | |
| TÜV certified triple electronic safeguards against accidental activation of boiling water | |
| GROHE Long-Life finish | |
| GROHE SilkMove 28 mm ceramic cartridge | |
| insulated tubular spout, swivel area 150° | |
| separate water ways | |
| flexible connection hoses | |
| GROHE Red boiler M size | |
| 3 liter 100° C boiling water, 4 liter total capacity | |
| required inlet pressure: 1-7 bar | |
| with flexible connection hose and outlet for boiling water | |
| CE approved | |
| power supply 230 V 50 Hz | |
| power consumption 2100 W, standby power consumption 15 W | |
| energy efficiency class A | |
| GROHE Blue S-Size filter starter set | |
| for protection of the boiler from limescale | |
| capacity 600 l at 20° dKH, flow rate measuring unit | |

GROHE RED



Ref. no.

Colour

30 327 001
30 327 DC1
30 327 AL1
30 327 KS1

chrome
supersteel
brushed hard graphite
velvet black

GROHE Red Duo
Faucet and M size boiler
GROHE Red Duo single-lever sink mixer

L-spout


GROHE ChildLock push buttons for boiling water
TÜV certified triple electronic safeguards against accidental activation of boiling water

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge
insulated tubular spout, swivel area 150°
separate water ways
flexible connection hoses

GROHE Red boiler M size

3 liter 100° C boiling water, 4 liter total capacity
required inlet pressure: 1-7 bar
with flexible connection hose and outlet for boiling water
CE approved
power supply 230 V 50 Hz
power consumption 2100 W, standby power consumption 15 W
energy efficiency class A
GROHE Blue S-Size filter starter set
for protection of the boiler from limescale
capacity 600 l at 20° dKH, flow rate measuring unit



30 080 001


chrome

GROHE Red Mono
Pillar tap and L size boiler
GROHE Red Mono pillar tap
C-spout

GROHE ChildLock push buttons for boiling water
TÜV certified triple electronic safeguards against accidental activation of boiling water

GROHE Long-Life finish

GROHE Red boiler L size
5.5 liter 100° C boiling water, 7 liter total capacity
required inlet pressure: 1-7 bar
with flexible connection hose and outlet for boiling water
CE approved
power supply 230 V 50 Hz
power consumption 2100 W, standby power consumption 15 W
energy efficiency class A
GROHE Blue S-Size filter starter set
for protection of the boiler from limescale
capacity 600 l at 20° dKH, flow rate measuring unit



30 085 001
30 085 DC1
30 085 AL1

chrome
supersteel
brushed hard graphite

GROHE Red Mono
Pillar tap and M size boiler
GROHE Red Mono pillar tap
C-spout


GROHE ChildLock push buttons for boiling water
TÜV certified triple electronic safeguards against accidental activation of boiling water

GROHE Long-Life finish

GROHE Red boiler M size
3 liter 100° C boiling water, 4 liter total capacity
required inlet pressure: 1-7 bar
with flexible connection hose and outlet for boiling water
CE approved
power supply 230 V 50 Hz
power consumption 2100 W, standby power consumption 15 W
energy efficiency class A
GROHE Blue S-Size filter starter set
for protection of the boiler from limescale
capacity 600 l at 20° dKH, flow rate measuring unit

GROHE RED

Ref. no. Colour



30 339 001
30 339 DC1


chrome
supersteel

GROHE Red Mono
Pillar tap and M size boiler
GROHE Red Mono pillar tap
L-spout

GROHE ChildLock push buttons for boiling water
TÜV certified triple electronic safeguards against accidental activation of boiling water


GROHE Long-Life finish
insulated tubular spout, swivel area 150°

GROHE Red boiler M size
3 liter 100° C boiling water, 4 liter total capacity
required inlet pressure: 1-7 bar
with flexible connection hose and outlet for boiling water
CE approved
power supply 230 V 50 Hz
power consumption 2100 W, standby power consumption 15 W
energy efficiency class A
GROHE Blue S-Size filter starter set
for protection of the boiler from limescale
capacity 600 l at 20° dKH, flow rate measuring unit




40 830 001

GROHE Red
Boiler Size M
reservoir for boiling and hot water
3 liter boiling water
4 liter total capacity
required inlet pressure: 1-7 bar
with flexible connection hoses and connection for boiling water
CE approved
power supply 230 V 50 Hz 30 VA
power consumption 2100 W
standby power consumption 15 W



40 831 001

GROHE Red
Boiler Size L
reservoir for boiling and hot water
5.5 liter boiling water
7 liter total capacity
required inlet pressure: 1-7 bar
with flexible connection hoses and connection for boiling water
CE approved
power supply 230 V 50 Hz 30 VA
power consumption 2100 W
standby power consumption 15 W




40 432 000

GROHE Red
Tea glasses (4 pieces)
heat proof glass with GROHE Red decor
dishwasher safe
volume 250 ml


GROHE K7

Ref. no. Colour



32 950 000 chrome
32 950 DC0 supersteel

K7
Single-lever sink mixer 1/2"
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
 professional spray
 diverter: mousseur/spray jet
 automatic return to mousseur
 metal spray
 adjustable flow rate limiter
 swivel spout
 swivel area 140°
 protected against backflow
 flexible connection hoses
 rapid installation system
 maximum flow rate (at 3 bar): 14 l/min




31 379 000 chrome
31 379 DC0 supersteel

K7
Single-lever sink mixer 1/2"
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
 professional spray
 diverter: mousseur/spray jet
 automatic return to mousseur
 metal spray
 adjustable flow rate limiter
 swivel spout
 swivel area 140°
 protected against backflow
 flexible connection hoses
 rapid installation system
 maximum flow rate (at 3 bar): 14.5 l/min

GROHE ZEDRA / ZEDRA SMARTCONTROL / ZEDRA TOUCH

Ref. no.

Colour



30 219 002
30 219 DC2

chrome
supersteel

Zedra Touch

Electronic single-lever sink mixer 1/2"

Touch: activation of water via skin contact

battery supply 6 V lithium-battery, type CR-P2

CE approved, solenoid valve

safety stop after 60 sec.(factory set)

GROHE Long-Life finish

GROHE SilkMove 35 mm ceramic cartridge

Lead and Nickel Free Inner Water Ways

GROHE Magnetic Docking guarantees easy retraction and smooth docking
pull-out spray with 3 spray types

diverter: laminar spray/SpeedClean shower jet/GROHE Blade spray

stop function - pause button to stop the water flow

automatic return to laminar spray


adjustable flow rate limiter

swivel tubular spout, swivel area 360°

protected against backflow

flexible connection hoses

maximum flow rate (at 3 bar): 9 l/min



31 886 000
31 886 DC0

chrome
supersteel

Zedra SmartControl

Sink mixer with SmartControl

GROHE Long-Life finish

pull-out dual spray

GROHE Magnetic Docking guarantees easy retraction and smooth docking

GROHE SmartControl push for ON-OFF, turn for volume adjustment from water saving eco mode to Full Flow

temperature adjustment by turning of mixing valve on body

swivel tubular spout, swivel area 140°


protected against backflow

flexible connection hoses

metal fixation set

Lead and Nickel Free Inner Water Ways

maximum flow rate (at 3 bar): 10 l/min



31 593 002
31 593 DC2

chrome
supersteel

Zedra SmartControl

Sink mixer with SmartControl

GROHE Long-Life finish

pull-out spray with laminar

GROHE Magnetic Docking guarantees easy retraction and smooth docking

GROHE SmartControl push for ON-OFF, turn for volume adjustment from water saving eco mode to Full Flow

temperature adjustment by turning of mixing valve on body

swivel tubular spout, swivel area 140°


protected against backflow

flexible connection hoses

metal fixation set

Lead and Nickel Free Inner Water Ways

maximum flow rate (at 3 bar): 10 l/min



32 294 002
32 294 DC2

chrome
supersteel

Zedra

Single-lever sink mixer 1/2"

GROHE Long-Life finish

GROHE SilkMove 35 mm ceramic cartridge

GROHE Magnetic Docking guarantees easy retraction and smooth docking

pull-out spray with 3 spray types

diverter: laminar spray/SpeedClean shower jet/GROHE Blade spray

stop function - pause button to stop the water flow

automatic return to laminar spray

adjustable flow rate limiter

swivel tubular spout, swivel area 360°

protected against backflow


flexible connection hoses

metal fixation set

Lead and Nickel Free Inner Water Ways

maximum flow rate (at 3 bar): 9 l/min

GROHE ZEDRA / ZEDRA SMARTCONTROL / ZEDRA TOUCH




Ref. no.

Colour

| | |
|--|------------|
| 32 553 002 | chrome |
| 32 553 DC2 | supersteel |
| Zedra | |
| Single-lever sink mixer 1/2" | |
| GROHE Long-Life finish | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| GROHE Magnetic Docking guarantees easy retraction and smooth docking | |
| pull-out dual spray | |
| diverter: laminar spray/SpeedClean shower jet | |
| automatic return to laminar spray | |
| adjustable flow rate limiter | |
| swivel tubular spout, swivel area 360° | |
| protected against backflow | |
| flexible connection hoses | |
| metal fixation set | |
| Lead and Nickel Free Inner Water Ways | |
| maximum flow rate (at 3 bar): 10 l/min | |


GROHE ESSENCE



Ref. no.


Colour

| | |
|--|---------------|
| 31 892 000 | chrome |
| 31 892 DC0 | supersteel |
| 31 892 KF0 | phantom black |
| Essence SmartControl | |
| Sink mixer with SmartControl | |
| GROHE Long-Life finish | |
| pull-out dual spray | |
| GROHE Magnetic Docking guarantees easy retraction and smooth docking | |
| GROHE SmartControl push for ON-OFF, turn for volume adjustment from water saving eco mode to Full Flow | |
| temperature adjustment by turning of mixing valve on body | |
| swivel tubular spout, swivel area 140° | |
| protected against backflow | |
| flexible connection hoses | |
| metal fixation set | |
| Lead and Nickel Free Inner Water Ways | |
| maximum flow rate (at 3 bar): 10 l/min | |




| | |
|--|-----------------------|
| 31 615 000 | chrome |
| 31 615 DC0 | supersteel |
| 31 615 GLO | cool sunrise |
| 31 615 GN0 | brushed cool sunrise |
| 31 615 DAO | warm sunset |
| 31 615 DL0 | brushed warm sunset |
| 31 615 A00 | hard graphite |
| 31 615 AL0 | brushed hard graphite |
| Essence SmartControl | |
| Sink mixer with SmartControl | |
| GROHE Long-Life finish | |
| pull-out spray with laminar | |
| GROHE Magnetic Docking guarantees easy retraction and smooth docking | |
| GROHE SmartControl push for ON-OFF, turn for volume adjustment from water saving eco mode to Full Flow | |
| temperature adjustment by turning of mixing valve on body | |
| swivel tubular spout, swivel area 140° | |
| protected against backflow | |
| flexible connection hoses | |
| metal fixation set | |
| Lead and Nickel Free Inner Water Ways | |
| maximum flow rate (at 3 bar): 10 l/min | |

31 928 KF0 phantom black
ditto, Professional exclusive



| | |
|--|---------------|
| 30 503 000 | chrome |
| 30 503 DC0 | supersteel |
| 30 503 KF0 | phantom black |
| Essence | |
| Single-lever sink mixer 1/2" | |
| GROHE Long-Life finish | |
| GROHE SilkMove 28 mm ceramic cartridge with integrated temperature limiter | |
| professional spray | |
| with flexible, hygienic GROHFlexx kitchen Santoprene hose | |
| diverter: laminar spray/SpeedClean shower jet | |
| automatic return to laminar spray | |
| metal spray | |
| GROHE Magnetic Docking guarantees easy retraction and smooth docking | |
| swivel spout, swivel area 360° | |
| protected against backflow | |
| flexible connection hoses, metal fixation set | |
| maximum flow rate (at 3 bar): 8 l/min | |
| replaces Essence sink mixer 30 294 xx0 | |

GROHE ESSENCE



Ref. no.

Colour

| | |
|------------|-----------------------|
| 30 294 GL0 | cool sunrise |
| 30 294 GN0 | brushed cool sunrise |
| 30 294 DL0 | brushed warm sunset |
| 30 294 A00 | hard graphite |
| 30 294 AL0 | brushed hard graphite |

Essence

Single-lever sink mixer 1/2"

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

flow strainer

with integrated temperature limiter

professional spray

with flexible, hygienic GROHFlexx kitchen Santoprene hose

diverter: laminar spray/SpeedClean shower jet

automatic return to laminar spray

metal spray

GROHE Magnetic Docking guarantees easy retraction and smooth docking

swivel spout

swivel area 360°

protected against backflow

flexible connection hoses

metal fixation set

maximum flow rate (at 3 bar): 8 l/min




| | |
|------------|---------------------|
| 30 321 GE0 | green |
| 30 321 XC0 | dark grey |
| 30 321 MW0 | chrome/sheer marble |
| 30 321 HG0 | dark brown |
| 30 321 DG0 | red |
| 30 321 DP0 | pink |
| 30 321 DU0 | purple |
| 30 321 TY0 | blue |
| 30 321 YF0 | yellow |
| 30 321 YR0 | orange |

GROHFlexx kitchen hose spout

for 30 294/30 503

flexible, hygienic **GROHFlexx kitchen** Santoprene hose



| | |
|------------|-----------------------|
| 30 504 000 | chrome |
| 30 504 DC0 | supersteel |
| 30 504 GL0 | cool sunrise |
| 30 504 GN0 | brushed cool sunrise |
| 30 504 DA0 | warm sunset |
| 30 504 DL0 | brushed warm sunset |
| 30 504 A00 | hard graphite |
| 30 504 AL0 | brushed hard graphite |
| 30 504 KF0 | phantom black |

Essence

Single-lever sink mixer 1/2"

GROHE Long-Life finish

GROHE SilkMove 28 mm ceramic cartridge

pull-out dual spray - switching between regular flow and spray

diverter: laminar spray/SpeedClean shower jet

automatic return to laminar spray

metal spray

swivel tubular spout, swivel area 360°

integrated non-return valve

protected against backflow


flexible connection hoses, metal fixation set

integrated temperature limiter

maximum flow rate (at 3 bar): 8 l/min

replaces Essence sink mixer 30 270 xx0

GROHE ESSENCE



Ref. no.

Colour


| | |
|------------|-----------------------|
| 30 505 000 | chrome |
| 30 505 DCO | supersteel |
| 30 505 GLO | cool sunrise |
| 30 505 GN0 | brushed cool sunrise |
| 30 505 DAO | warm sunset |
| 30 505 DLO | brushed warm sunset |
| 30 505 A00 | hard graphite |
| 30 505 AL0 | brushed hard graphite |
| 30 505 KF0 | phantom black |

Essence
Single-lever sink mixer 1/2"
GROHE Long-Life finish
GROHE SilkMove 28 mm ceramic cartridge
GROHE AquaGuide adjustable mousseur
 swivel tubular spout
 adjustable swivel area 0° / 150° / 360°
 flexible connection hoses, rapid installation system
 integrated temperature limiter
 maximum flow rate (at 3 bar): 6.5 l/min
 replaces Essence sink mixer 30 269 xx0

GROHE MINTA / MINTA SMARTCONTROL / MINTA TOUCH

Ref. no.


Colour



31 360 001
31 360 DC1

chrome
supersteel


Minta Touch
Electronic single-lever sink mixer 1/2"
L-spout
Touch: activation of water via skin contact
battery supply 6 V lithium-battery, type CR-P2
CE approved, solenoid valve
safety stop after 60 sec.(factory set)
GROHE Long-Life finish
GROHE SilkMove 46 mm ceramic cartridge
pull out mousseur spout
adjustable flow rate limiter
swivel tubular spout, swivel area 360°
protected against backflow
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 10 l/min



31 358 002
31 358 DC2

chrome
supersteel


Minta Touch
Electronic single-lever sink mixer 1/2"
C-spout
Touch: activation of water via skin contact
battery supply 6 V lithium-battery, type CR-P2
CE approved, solenoid valve
safety stop after 60 sec.(factory set)
GROHE Long-Life finish
GROHE SilkMove 46 mm ceramic cartridge
pull-out dual spray
diverter: laminar spray/SpeedClean shower jet
swivel tubular spout, swivel area 360°
protected against backflow
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 9 l/min



31 889 000
31 889 DC0

chrome
supersteel

Minta SmartControl
Sink mixer with SmartControl
GROHE Long-Life finish
pull-out dual spray
GROHE Magnetic Docking guarantees easy retraction and smooth docking
GROHE SmartControl push for ON-OFF, turn for volume adjustment from water saving eco mode to Full Flow
temperature adjustment by turning of mixing valve on body
swivel tubular spout, swivel area 140°
protected against backflow
flexible connection hoses
metal fixation set
Lead and Nickel Free Inner Water Ways
maximum flow rate (at 3 bar): 10 l/min




31 613 000
31 613 DC0
31 613 A00

chrome
supersteel
hard graphite

Minta SmartControl
Sink mixer with SmartControl
GROHE Long-Life finish
pull-out spray with laminar
GROHE Magnetic Docking guarantees easy retraction and smooth docking
GROHE SmartControl push for ON-OFF, turn for volume adjustment from water saving eco mode to Full Flow
temperature adjustment by turning of mixing valve on body
swivel tubular spout, swivel area 140°
protected against backflow
flexible connection hoses
metal fixation set
Lead and Nickel Free Inner Water Ways
maximum flow rate (at 3 bar): 10 l/min

GROHE MINA / MINTA SMARTCONTROL / MINTA TOUCH



Ref. no.

Colour

| | |
|------------|-----------------------|
| 30 274 000 | chrome |
| 30 274 DC0 | supersteel |
| 30 274 GN0 | brushed cool sunrise |
| 30 274 DAO | warm sunset |
| 30 274 DL0 | brushed warm sunset |
| 30 274 A00 | hard graphite |
| 30 274 AL0 | brushed hard graphite |

Minta

Single-lever sink mixer 1/2"

L-spout

GROHE Long-Life finish

GROHE SilkMove 46 mm ceramic cartridge

pull-out dual spray - switching between regular flow and spray

diverter: laminar spray/SpeedClean shower jet

automatic return to laminar spray

adjustable flow rate limiter


swivel tubular spout, swivel area 360°

protected against backflow

flexible connection hoses

rapid installation system

maximum flow rate (at 3 bar): 9 l/min

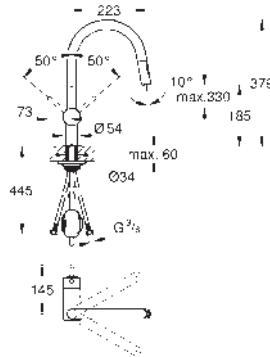

32 321 002
32 321 DC2
32 321 GN2
32 321 DL2
32 321 AL2

chrome
supersteel
brushed cool sunrise
brushed warm sunset
brushed hard graphite

Minta

Single-lever sink mixer 1/2"

C-spout

GROHE Long-Life finish

GROHE SilkMove 46 mm ceramic cartridge

pull-out dual spray

diverter: laminar spray/SpeedClean shower jet

adjustable flow rate limiter


swivel tubular spout, swivel area 360°

protected against backflow

flexible connection hoses

rapid installation system

maximum flow rate (at 3 bar): 9 l/min



32 322 002
32 322 DC2
32 322 DL2
32 322 AL2

chrome
supersteel
brushed warm sunset
brushed hard graphite

Minta

Single-lever sink mixer 1/2"

U-spout

GROHE Long-Life finish

GROHE SilkMove 46 mm ceramic cartridge

pull-out dual spray

diverter: laminar spray/SpeedClean shower jet

automatic return to laminar spray

adjustable flow rate limiter


swivel tubular spout, swivel area 360°

protected against backflow

flexible connection hoses

rapid installation system

maximum flow rate (at 3 bar): 9 l/min



32 168 000
32 168 DC0

chrome
supersteel

Minta

Single-lever sink mixer 1/2"

L-spout

GROHE Long-Life finish

GROHE SilkMove 46 mm ceramic cartridge

pull out mousseur spout

adjustable flow rate limiter

swivel tubular spout, swivel area 360°




protected against backflow

flexible connection hoses


rapid installation system

maximum flow rate (at 3 bar): 10 l/min

GROHE MINA / MINTA SMARTCONTROL / MINTA TOUCH

| Ref. no. | Colour |
|---|---|
|     | <p>32 918 000 chrome 32 918 DC0 supersteel</p> <p>Minta Single-lever sink mixer 1/2" C-spout GROHE Long-Life finish GROHE SilkMove 46 mm ceramic cartridge pull out mousseur spout adjustable flow rate limiter swivel tubular spout, swivel area 360° protected against backflow flexible connection hoses rapid installation system maximum flow rate (at 3 bar): 10.5 l/min</p> <p>32 918 00E chrome ditto, with GROHE Water Saving flow limiter, maximum flow rate (at 3 bar): 5 l/min</p> <p>32 067 000 chrome</p> <p>Minta Single-lever sink mixer 1/2" U spout GROHE Long-Life finish GROHE SilkMove 46 mm ceramic cartridge pull out mousseur spout adjustable flow rate limiter swivel tubular spout, swivel area 360° protected against backflow flexible connection hoses rapid installation system maximum flow rate (at 3 bar): 10.5 l/min</p> <p>31 375 000 chrome 31 375 DC0 supersteel 31 375 GN0 brushed cool sunrise 31 375 DL0 brushed warm sunset 31 375 AL0 brushed hard graphite</p> <p>Minta Single-lever sink mixer 1/2" L-spout single hole installation GROHE Long-Life finish GROHE SilkMove 46 mm ceramic cartridge adjustable flow rate limiter swivel tubular spout, swivel range 0°/150°/360° flexible connection hoses protected against backflow rapid installation system maximum flow rate (at 3 bar): 11.5 l/min</p> <p>32 917 000 chrome 32 917 DC0 supersteel 32 917 DL0 brushed warm sunset 32 917 AL0 brushed hard graphite 32 917 KS0 velvet black</p> <p>Minta Single-lever sink mixer 1/2" C-spout GROHE Long-Life finish GROHE SilkMove 46 mm ceramic cartridge adjustable flow rate limiter swivel tubular spout, selectable swivel area: 0° / 150° / 360° flexible connection hoses rapid installation system maximum flow rate (at 3 bar): 11.5 l/min</p> |

GROHE MINTA / MINTA SMARTCONTROL / MINTA TOUCH



Ref. no.


Colour

| | |
|------------|-----------------------|
| 32 488 000 | chrome |
| 32 488 DC0 | supersteel |
| 32 488 DL0 | brushed warm sunset |
| 32 488 AL0 | brushed hard graphite |


Minta
Single-lever sink mixer 1/2"
U spout
GROHE Long-Life finish
GROHE SilkMove 46 mm ceramic cartridge
adjustable flow rate limiter
selectable swivel area: 0° / 150° / 360°, swivel tubular spout
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 11.5 l/min

GROHE EUROCUBE

Ref. no. Colour



31 395 000
31 395 DC0
Eurocube
Single-lever sink mixer 1/2"
GROHE Long-Life finish
GROHE SilkMove 28 mm ceramic cartridge
professional spray
diverter: mousseur/spray jet
automatic return to laminar spray
metal spray
swivel spout
swivel area 140°
360° maneuverable spring arm
protected against backflow
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 8 l/min




31 255 000
31 255 DC0
Eurocube
Single-lever sink mixer 1/2"
GROHE Long-Life finish
GROHE SilkMove 28 mm ceramic cartridge
swivel cast spout
swivel area 90°
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 9.5 l/min


GROHE EURODISC COSMOPOLITAN

Ref. no.


Colour



| | |
|---|--------|
| 32 257 002 | chrome |
| Eurodisc Cosmopolitan | |
| Single-lever sink mixer 1/2" | |
| medium spout | |
| GROHE Long-Life finish | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| pull-out dual spray | |
| diverter: mousseur/spray jet | |
| automatic return to mousseur | |
| adjustable flow rate limiter | |
| swivel cast spout | |
| swivel area 100° | |
| protected against backflow | |
| flexible connection hoses | |
| rapid installation system | |
| maximum flow rate (at 3 bar): 11 l/min | |




| | |
|---|--------|
| 32 259 003 | chrome |
| Eurodisc Cosmopolitan | |
| Single-lever sink mixer 1/2" | |
| high spout | |
| GROHE Long-Life finish | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| Lead and Nickel Free Inner Water Ways | |
| adjustable flow rate limiter | |
| swivel tubular spout | |
| swivel area 150° | |
| flexible connection hoses | |
| metal fixation set | |
| maximum flow rate (at 3 bar): 10 l/min | |



| | |
|---|--------|
| 33 770 002 | chrome |
| Eurodisc Cosmopolitan | |
| Single-lever sink mixer 1/2" | |
| medium spout | |
| GROHE Long-Life finish | |
| GROHE SilkMove 35 mm ceramic cartridge | |
| adjustable flow rate limiter | |
| swivel cast spout | |
| swivel area 140° | |
| flexible connection hoses | |
| rapid installation system | |
| maximum flow rate (at 3 bar): 13 l/min | |

GROHE CONCETTO




Ref. no.

Colour

31 491 000
31 491 DC0

chrome
supersteel


Concetto
Single-lever sink mixer 1/2"
GROHE Long-Life finish
GROHE SilkMove 28 mm ceramic cartridge
professional spray
with flexible, hygienic GROHFlexx kitchen Santoprene hose
diverter: laminar spray/SpeedClean shower jet
automatic return to laminar spray
GROHE Magnetic Docking guarantees easy retraction and smooth docking
swivel spout
swivel area 360°
protected against backflow
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 8 l/min



31 483 002
31 483 DC2

chrome
supersteel


Concetto
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
pull-out dual spray
diverter: laminar spray/SpeedClean shower jet
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
protected against backflow
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 9.5 l/min



32 663 003
32 663 DC3

chrome
supersteel

Concetto
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
pull-out mousseur spray
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
protected against backflow
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 9.5 l/min




32 661 003
32 661 DC3

chrome
supersteel

Concetto
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
adjustable flow rate limiter
swivel tubular spout
swivel area 150°
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 10 l/min

GROHE CONCETTO



Ref. no.


Colour

30 273 001
30 273 DC1

chrome
supersteel

Concetto

Single-lever sink mixer 1/2"
medium spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
pull-out dual spray - switching between regular flow and spray diverter: laminar spray/SpeedClean shower jet
automatic return to laminar spray
adjustable flow rate limiter
swivel cast spout
swivel area 100°
protected against backflow
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 7.5 l/min




31 129 001
31 129 DC1

chrome
supersteel

Concetto

Single-lever sink mixer 1/2"
medium spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
pull out mousseur spout
adjustable flow rate limiter
swivel cast spout
swivel area 100°
protected against backflow
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 7.5 l/min




31 128 001
31 128 DC1

chrome
supersteel

Concetto

Single-lever sink mixer 1/2"
medium spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel cast spout
swivel area 140°
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 12 l/min




32 667 001

chrome

Concetto

Single-lever sink mixer 1/2"
wall mounted
GROHE Long-Life finish
GROHE SilkMove 46 mm ceramic cartridge
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
projection 280 mm
S-unions
maximum flow rate (at 3 bar): 13.5 l/min

GROHE EUROCOSMO



Ref. no.


Colour

31 481 001

chrome

Eurocosmo
Single-lever sink mixer 1/2"

high spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
pull-out dual spray
diverter: laminar spray/SpeedClean shower jet
GROHE Water Saving mousseur, flow rate less than 9 l/min
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
protected against backflow
flexible connection hoses
metal fixation set




32 843 002
32 843 DC2

chrome
supersteel

Eurocosmo
Single-lever sink mixer 1/2"

high spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
adjustable flow rate limiter
swivel tubular spout
swivel area 150°
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 10 l/min

32 843 20E
ditto, maximum flow rate (at 3 bar): 5 l/min




30 193 000
30 193 DC0

chrome
supersteel

Eurocosmo
Single-lever sink mixer 1/2"

medium spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel tubular spout
swivel area 140°
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 12 l/min




32 842 000

chrome

Eurocosmo
Single-lever sink mixer 1/2"

low spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel tubular spout
swivel area 140°
flexible connection hoses
rapid installation system
maximum flow rate (at 3 bar): 12 l/min

GROHE EUROSMART




Ref. no.

Colour

30 619 000
30 619 DC0
30 619 2430

chrome
supersteel
matte black


Eurosmart
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE SilkMove 28 mm ceramic cartridge
pull-out dual spray - switching between regular flow and spray diverter: laminar spray/SpeedClean shower jet
automatic return to laminar spray
adjustable flow rate limiter
swivel cast spout
swivel area 360°
Lead and Nickel Free Inner Water Ways
flexible connection hoses
metal fixation set
protected against backflow
maximum flow rate (at 3 bar): 7 l/min
professional edition



30 305 001
30 305 DC1
30 305 2431

chrome
supersteel
matte black


Eurosmart
Single-lever sink mixer 1/2"
low spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
pull-out dual spray - switching between regular flow and spray diverter: laminar spray/SpeedClean shower jet
automatic return to laminar spray
adjustable flow rate limiter
swivel cast spout
swivel area 90°, Lead and Nickel Free Inner Water Ways
flexible connection hoses
metal fixation set
protected against backflow
maximum flow rate (at 3 bar): 10.5 l/min
professional edition



30 567 000
30 567 DC0
30 567 2430

chrome
supersteel
matte black

Eurosmart
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE SilkMove 28 mm ceramic cartridge
integrated temperature limiter
swivel tubular spout
swivel area 150°, Lead and Nickel Free Inner Water Ways
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 10 l/min
professional edition




33 202 003
33 202 2433

chrome
matte black

Eurosmart
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel tubular spout
swivel area 150°, Lead and Nickel Free Inner Water Ways
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 11 l/min
professional edition

GROHE EUROSMART




Ref. no.

Colour

30 463 000
30 463 DC0
30 463 2430

chrome
supersteel
matte black


Eurosmart
Single-lever sink mixer 1/2"
medium spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel cast spout
swivel area 140°, Lead and Nickel Free Inner Water Ways
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 13 l/min
professional edition



33 281 003
33 281 DC3
33 281 2433

chrome
supersteel
matte black


Eurosmart
Single-lever sink mixer 1/2"
low spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel cast spout
swivel area 140°, Lead and Nickel Free Inner Water Ways
mousseur with coin slot for tool free replacement
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 11 l/min
professional edition



33 281 30E

chrome


Eurosmart
Single-lever sink mixer 1/2"
low spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
integrated temperature limiter
adjustable flow rate limiter
swivel cast spout
swivel area 140°
Lead and Nickel Free Inner Water Ways
GROHE Water Saving - Less water, perfect flow
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 5 l/min
professional edition



33 281 243D

matte black

Eurosmart
Single-lever sink mixer 1/2"
low spout
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel cast spout
swivel area 140°, Lead and Nickel Free Inner Water Ways
mousseur with coin slot for tool free replacement
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 5 l/min
professional edition




32 224 003

chrome


Eurosmart
Single-lever sink mixer 1/2"
wall mounted
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel tubular spout
swivel area 360°, projection 276 mm
S-unions
maximum flow rate (at 3 bar): 13.5 l/min
professional edition

GROHE EUROSMART


Ref. no. Colour



31 391 003 chrome
Eurosmart
Single-lever sink mixer 1/2"
wall mounted
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel tubular spout
swivel area 360°, projection 216 mm
S-unions
maximum flow rate (at 3 bar): 13.5 l/min
professional edition



31 509 003 chrome
Eurosmart
Single-lever sink mixer 1/2"
wall mounted
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
mousseur
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
projection 149 mm
integrated temperature limiter
S-unions
maximum flow rate (at 3 bar): 13.5 l/min
professional edition




32 482 003 chrome
Eurosmart
Single-lever sink mixer 1/2"
wall mounted
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
adjustable flow rate limiter
swivel tubular spout
swivel area 360°, projection 244 mm
C-unions
maximum flow rate (at 3 bar): 13.5 l/min
professional edition

GROHE COSTA

| | Ref. no. | Colour |
|---|--|--------|
|  | 31 812 001 Costa L Single-hole sink mixer 1/2" metal handles heat insulated GROHE Long-Life finish GROHE Long-Life headparts swivel tubular spout, swivel area 360° chain ring flexible connection hoses maximum flow rate (at 3 bar): 13 l/min | chrome |
|  | 31 191 001 Costa L Wall sink mixer, 1/2" wall mounted metal handles heat insulated GROHE Long-Life finish GROHE Long-Life headparts swivel tubular spout, swivel area 360° S-unions maximum flow rate (at 3 bar): 13 l/min | chrome |
|  | 31 187 001 Costa L Wall sink mixer, 1/2" metal handles heat insulated GROHE Long-Life finish GROHE Long-Life headparts swivel tubular spout, swivel area 360° S-unions maximum flow rate (at 3 bar): 13 l/min | chrome |
|  | 30 484 001 Costa L Bibtap 1/2" wall mounted metal handle heat insulated marking: blue GROHE Long-Life finish GROHE Long-Life headparts swivel tubular spout swivel area 360° | chrome |
|  | 30 098 001 Costa L Bibtap 1/2" wall mounted metal handle heat insulated marking: blue GROHE Long-Life finish GROHE Long-Life headparts | chrome |

GROHE BAU LINES




Ref. no.

Colour


30 543 000 chrome

BauLoop
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE Long-Life 28 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
pull-out mousseur spray
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
protected against backflow
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 8 l/min
minimum pressure 1.0 bar




31 368 001 chrome

BauLoop
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE Long-Life 28 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
swivel tubular spout
swivel area 360°, flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 11.5 l/min
for installation on a max. 40 mm worktop fixation set 48 384 000 is needed




31 706 000 chrome

BauLoop
Single-lever sink mixer 1/2"
medium spout
GROHE Long-Life finish
GROHE Long-Life 35 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
swivel tubular spout
swivel area 140°, mousseur with coin slot for tool free replacement
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 11 l/min



30 536 000 chrome

BauEdge
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE Long-Life 28 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
pull-out mousseur spray
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
protected against backflow
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 8 l/min
minimum pressure 1.0 bar




30 547 000 chrome


BauCurve
Single-lever sink mixer 1/2"
high spout
GROHE Long-Life finish
GROHE Long-Life 28 mm ceramic cartridge
Lead and Nickel Free Inner Water Ways
pull-out mousseur spray
adjustable flow rate limiter
swivel tubular spout
swivel area 360°
protected against backflow
flexible connection hoses
metal fixation set
maximum flow rate (at 3 bar): 8 l/min
minimum pressure 1.0 bar

GROHE BAU LINES


Ref. no. Colour




31 536 001 chrome
BauCurve
Single-lever sink mixer 1/2"
 high spout
GROHE Long-Life finish
GROHE Long-Life 28 mm ceramic cartridge
 Lead and Nickel Free Inner Water Ways
 swivel tubular spout
 swivel area 360°, flexible connection hoses
 metal fixation set
 maximum flow rate (at 3 bar): 11.5 l/min



31 367 001 chrome
BauEdge
Single-lever sink mixer 1/2"
 high spout
GROHE Long-Life finish
GROHE Long-Life 28 mm ceramic cartridge
 Lead and Nickel Free Inner Water Ways
 swivel tubular spout
 swivel area 360°, flexible connection hoses
 metal fixation set
 maximum flow rate (at 3 bar): 11.5 l/min



31 693 000 chrome
BauEdge
Single-lever sink mixer 1/2"
 medium spout
GROHE Long-Life finish
GROHE Long-Life 35 mm ceramic cartridge
 Lead and Nickel Free Inner Water Ways
 swivel tubular spout
 swivel area 140°, mousseur with coin slot for tool free replacement
 flexible connection hoses
 metal fixation set
 maximum flow rate (at 3 bar): 11 l/min



31 680 000 chrome
BauEco
Single-lever sink mixer 1/2"
 low spout
GROHE Long-Life finish
GROHE Long-Life 35 mm ceramic cartridge
 Lead and Nickel Free Inner Water Ways
 swivel tubular spout
 swivel area 140°, mousseur with coin slot for tool free replacement
 flexible connection hoses
 metal fixation set
 maximum flow rate (at 3 bar): 10.5 l/min

GROHE KITCHEN ACCESSORIES

Ref. no.

Colour



450
100

150

40 852 SD0
40 852 GN0
40 852 DL0
40 852 AL0

stainless steel
brushed cool sunrise
brushed warm sunset
brushed hard graphite

Multifunctional colander

material: stainless steel
dimensions: 450 x 150 x 100 mm
dishwasher safe
corrosion free



490
100

150

40 853 SD0
40 853 GN0
40 853 DL0
40 853 AL0

stainless steel
brushed cool sunrise
brushed warm sunset
brushed hard graphite

Multifunctional colander

material: stainless steel
dimensions: 490 x 150 x 100 mm
dishwasher safe
corrosion free



348
490
25
13

40 854 SD0
40 854 GN0
40 854 DL0
40 854 AL0

stainless steel
brushed cool sunrise
brushed warm sunset
brushed hard graphite

Foldable big dish rack

material: stainless steel
dimensions: 490 x 348 mm
dishwasher safe
corrosion free



348
450
25
13

40 856 SD0
40 856 GN0
40 856 DL0
40 856 AL0

stainless steel
brushed cool sunrise
brushed warm sunset
brushed hard graphite

Foldable big dish rack

material: stainless steel
dimensions: 450 x 348 mm
dishwasher safe
corrosion free



110
22

70

40 752 L00

white

Sponge set
material: melamine
multi-packaging: 3 pieces



40 986 SD0
40 986 GN0
40 986 DL0
40 986 AL0

stainless steel
brushed cool sunrise
brushed warm sunset
brushed hard graphite

Waste set for kitchen sinks


round pop-up with push control
space saving waste set
including strainer plug
Ø 35 mm cut-out diameter
fits all kitchen sink series

GROHE KITCHEN ACCESSORIES


| | Ref. no. | Colour |
|---|--|--|
|  | 40 649 000 40 649 DC0 Cubic soap dispenser for liquid soap storage bin 500 ml GROHE Long-Life finish | chrome supersteel |
|  | 40 535 000 40 535 DC0 40 535 GLO 40 535 GN0 40 535 DA0 40 535 DL0 40 535 A00 40 535 AL0 Cosmopolitan soap dispenser for liquid soap storage bin 500 ml GROHE Long-Life finish | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
|  | 40 536 000 40 536 DC0 102165 243 0 Contemporary soap dispenser for liquid soap storage bin 500 ml GROHE Long-Life finish | chrome supersteel matte black |
|  | 36 194 000 Soap dispenser pillar tap with push-button, for liquid soap projection 113 mm for tap hole drillings 22 - 30 mm storage bin 1 l. GROHE Long-Life finish | chrome |

GROHE STAINLESS STEEL SINKS


Ref. no. Colour



| | |
|--|------------------------|
| 31 582 SD1 | stainless steel |
| K1000 | |
| Stainless steel sink with drainer | |
| model: K1000 80-S 116/52 1.0 rh | |
| mounting type: top mount or flush mount | |
| material: stainless steel AISI 304 (V2A) | |
| material thickness: 1.2 mm | |
| GROHE Long-Life finish | |
| finish: satin finish | |
| GROHE Whisper | |
| min. cabinet size: 800 mm | |
| dimensions: 1160 x 520 mm | |
| 1 bowl: 710 x 400 mm | |
| outer radius: R3, inner bowl radius: R10 | |
| GROHE FastFixation installation system | |
| sink mountable right | |
| cut-out (top mount): 1145 x 505 mm (R3) | |
| cut-out (flush mount): 1145 x 505 mm (R3) (top step outer size: -1161 x 521 -R8 deep -3.5 mm) | |
| waste: Ø 3.5" waste strainer with automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 10 | |



| | |
|--|------------------------|
| 31 581 SD1 | stainless steel |
| K1000 | |
| Stainless steel sink with drainer | |
| model: K1000 80-S 116/52 1.0 lh | |
| mounting type: top mount or flush mount | |
| material: stainless steel AISI 304 (V2A) | |
| material thickness: 1.2 mm | |
| GROHE Long-Life finish | |
| finish: satin finish | |
| GROHE Whisper | |
| min. cabinet size: 800 mm | |
| dimensions: 1160 x 520 mm | |
| 1 bowl: 710 x 400 mm | |
| outer radius: R3, inner bowl radius: R10 | |
| GROHE FastFixation installation system | |
| sink mountable left | |
| cut-out (top mount): 1145 x 505 mm (R3) | |
| cut-out (flush mount): 1145 x 505 mm (R3) (top step outer size: -1161 x 521 -R8 deep -3.5 mm) | |
| waste: Ø 3.5" waste strainer with automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 10 | |




| | |
|--|------------------------|
| 31 583 SD1 | stainless steel |
| K800 | |
| Stainless steel sink | |
| model: K800 60-S 51.8/51 1.0 | |
| mounting type: top mount or flush mount | |
| material: stainless steel AISI 304 (V2A) | |
| material thickness: 1 mm | |
| GROHE Long-Life finish | |
| finish: satin finish | |
| GROHE Whisper | |
| min. cabinet size: 600 mm | |
| dimensions: 518 x 510 mm | |
| 1 bowl: 462 x 400 x 200 mm | |
| outer radius: R3, inner bowl radius: R10 | |
| GROHE FastFixation installation system | |
| cut-out (top mount): 503 x 495 mm (R3) | |
| cut-out (flush mount): 503 x 495 mm (R3) (top step outer size: -519 x 511 -R8 deep -3.5 mm) | |
| waste: Ø 3.5" waste strainer with automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 8 | |

GROHE STAINLESS STEEL SINKS

| | Ref. no. | Colour |
|---|--|-----------------|
|  | 31 584 SD1 K800 Stainless steel sink model: K800 90-S 84.6/51 1.0 mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 1 mm GROHE Long-Life finish finish: satin finish GROHE Whisper min. cabinet size: 900 mm dimensions: 846 x 510 mm 1 bowl: 790 x 400 x 200 mm outer radius: R3, inner bowl radius: R10 GROHE FastFixation installation system cut-out (top mount): 831 x 495 mm (R3) cut-out (flush mount): 831 x 495 mm (R3) (top step outer size: -847 x 511 -R8 deep -3.5 mm) waste: Ø 3.5" waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set optional: push to open excenter (40 986 SD0) amount of fasteners included (top mount): 10 | stainless steel |
|  | 31 585 SD1 K800 Stainless steel sink model: K800 120-S 102.4/51 2.0 mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 1 mm GROHE Long-Life finish finish: satin finish GROHE Whisper min. cabinet size: 1200 mm dimensions: 1024 x 510 mm 1 bowl: 462 x 400 x 200 mm 2 bowl: 462 x 400 x 200 mm outer radius: R3, inner bowl radius: R10 GROHE FastFixation installation system cut-out (top mount): 1009 x 495 mm (R3) cut-out (flush mount): 1009 x 495 mm (R3) (top step outer size: -1025 x 511 -R8 deep -3.5 mm) waste: Ø 3.5" waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set optional: push to open excenter (40 986 SD0) amount of fasteners included (top mount): 12 | stainless steel |
|  | 31 586 SD1 K800 Stainless steel sink model: K800 120-S 102.4/51 1.0 mounting type: top mount or flush mount material: stainless steel AISI 304 (V2A) material thickness: 1 mm GROHE Long-Life finish finish: satin finish GROHE Whisper min. cabinet size: 1200 mm dimensions: 1024 x 510 mm 1 bowl: 968 x 400 x 200 mm outer radius: R3, inner bowl radius: R10 GROHE FastFixation installation system cut-out (top mount): 1009 x 495 mm (R3) cut-out (flush mount): 1009 x 495 mm (R3) (top step outer size: -1025 x 511 -R8 deep -3.5 mm) waste: Ø 3.5" waste strainer with automatic waste fitting accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set optional: push to open excenter (40 986 SD0) amount of fasteners included (top mount): 12 | stainless steel |

GROHE STAINLESS STEEL SINKS

Ref. no. Colour



31 574 SD1 stainless steel
31 574 GN1 brushed cool sunrise
31 574 DL1 brushed warm sunset
31 574 AL1 brushed hard graphite

K700U

Stainless steel sink

model: K700U 60-S 54.4/44.4 1.0

mounting type: undermount, top mount or flush mount
material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 550 x 450 mm

1 bowl: 500 x 400 x 200 mm

outer radius: R16 (undermount)/R3 (topmount), inner bowl radius: R15

GROHE FastFixation installation system

cut-out (undermount): 502 x 402 mm (R16)

cut-out (top mount): 535 x 435 mm

cut-out (flush mount): 535 x 435 mm (R3)(top step outer size: -551 x 451 -R8 deep -3.5 mm)


drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8



31 575 SD1 stainless steel

K700U

Stainless steel sink

model: K700U 80-S 76/45 1.5 lh

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 800 mm

dimensions: 760 x 450 mm

1 bowl: 500 x 400 x 200 mm

0.5 bowl: 180 x 400 x 140 mm

outer radius: R16 (undermount)/R3 (topmount), inner bowl radius: R15

GROHE FastFixation installation system

sink mountable left

cut-out (undermount): 712 x 402 mm (R16)

cut-out (top mount): 745 x 435 mm (R3)

cut-out (flush mount): 745 x 435 mm (R3) (top step outer size: -761 x 451 -R8 deep -3.5 mm)


drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10

amount of fasteners included (undermount): 10



31 576 SD1 stainless steel

K700U

Stainless steel sink

model: K700U 60-S 59.5/45 1.5 rh

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 595 x 450 mm

1 bowl: 340 x 400 x 200 mm

0.5 bowl: 180 x 400 x 140 mm

outer radius: R16 (undermount)/R3 (topmount), inner bowl radius: R15

GROHE FastFixation installation system

sink mountable right

cut-out (undermount): 547 x 402 mm (R16)

cut-out (top mount): 580 x 435 mm (R3)

cut-out (flush mount): 580 x 435 mm (R3) (top step outer size: -596 x 451 -R8 deep -3.5 mm)

drainer: Ø 3.5" basket strainer waste




accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8

GROHE STAINLESS STEEL SINKS



Ref. no.

Colour

31 577 SD1

stainless steel

K700U

Stainless steel sink

model: K700U 60-S 59.5/45 1.5 lh

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 595 x 450 mm

1 bowl: 340 x 400 x 200 mm

0.5 bowl: 180 x 400 x 140 mm

outer radius: R16 (undermount)/R3 (topmount), inner bowl radius: R15

GROHE FastFixation installation system

sink mountable left

cut-out (undermount): 547 x 402 mm (R16)

cut-out (top mount): 580 x 435 mm (R3)

cut-out (flush mount): 580 x 435 mm (R3) (top step outer size: -596 x 451 -R8

deep -3.5 mm)

drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8

31 578 SD1

stainless steel

K700

Stainless steel sink

model: K700 45-S 46.4/46.4 1.0

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 450 mm

dimensions: 464 x 464 mm

1 bowl: 400 x 400 x 200 mm

outer radius: R11 (undermount)/R3 (topmount), inner bowl radius: R10

GROHE FastFixation installation system

cut-out (undermount): 402 x 402 mm (R11)

cut-out (top mount): 449 x 449 mm (R3)

cut-out (flush mount): 449 x 449 mm (R3) (top step outer size: -465 x 465 -R8

deep -3.5 mm)

drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8

31 726 SD0

stainless steel

K700

Stainless steel sink

model: K700 60-S 55/45 1.0

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 550 x 450 mm

1 bowl: 500 x 400 x 200 mm

outer radius: R11 (undermount)/R3 (topmount), inner bowl radius: R10

GROHE FastFixation installation system

cut-out (undermount): 502 x 402 mm (R11)

cut-out (top mount): 535 x 435 mm

cut-out (flush mount): 535 x 435 mm (R3)(top step outer size: -551 x 451 -R8 deep

-3.5 mm)

drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set


optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8

GROHE STAINLESS STEEL SINKS

Ref. no. Colour



31 580 SD1 stainless steel

K700

Stainless steel sink

model: K700 90-S 86.4/46.4 1.0

mounting type: undermount, top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 900 mm

dimensions: 864 x 464 mm

1 bowl: 800 x 400 x 200 mm

outer radius: R11 (undermount)/R3 (topmount), inner bowl radius: R10

GROHE FastFixation installation system

cut-out (undermount): 802 x 402 mm (R11)

cut-out (top mount): 849 x 449 mm (R3)

cut-out (flush mount): 849 x 449 mm (R3) (top step outer size: -865 x 465 -R8

deep -3.5 mm)


drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 8

amount of fasteners included (undermount): 8



31 855 SD0 stainless steel

K700

Stainless steel sink

model: K700 90-S 86/50 2.0 lh

mounting type: top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 1 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 900 mm

dimensions: 860 x 500 mm

1 bowl: 430 x 450 x 200 mm

2 bowl: 300 x 401 x 200 mm

GROHE FastFixation installation system

cut-out (top mount): 845 x 485 mm (R3)


cut-out (flush mount): 845 x 485 mm (R3) (top step outer size: -861 x 501 -R8

deep -3.5 mm)

drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set

amount of fasteners included (top mount): 12



31 571 SD1 stainless steel

K500

Stainless steel sink with drainer

model: K500 45-S 86/50 1.0 rev

mounting type: top mount

material: stainless steel AISI 304 (V2A)

material thickness: 0.7 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 450 mm

dimensions: 860 x 500 mm

1 bowl: 340 x 420 x 170 mm

outer radius: R6 (top mount), inner bowl radius: R65

GROHE FastFixation installation system

sink mountable left or right

cut-out (top mount): 842 x 482 mm

drilling holes: 2 x 35 mm




waste: Ø 3.5" waste strainer with automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 14

GROHE STAINLESS STEEL SINKS



Ref. no.

Colour

31 563 SD1 stainless steel

K500

Stainless steel sink with drainer

model: K500 60-S 100/50 1.0 rev

mounting type: top mount or flush mount

material: stainless steel AISI 304 (V2A)

material thickness: 0.7 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 550 mm

dimensions: 1000 x 500 mm

1 bowl: 450 x 400 x 180 mm

outer radius: R6 (topmount), inner bowl radius: R75

GROHE FastFixation installation system

sink mountable left or right

cut-out (top-mount): 990 x 490 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5" waste strainer with automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 16

31 572 SD1 stainless steel

K500

Stainless steel sink with drainer

model: K500 60-S 100/50 1.5 rev

mounting type: top mount

material: stainless steel AISI 304 (V2A)

material thickness: 0.7 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 1000 x 500 mm

1 bowl: 340 x 420 x 185 mm

0.5 bowl: 170 x 320 x 125 mm

outer radius: R6 (top mount), inner bowl radius: R65

GROHE FastFixation installation system

sink mountable left or right

cut-out (top-mount): 990 x 490 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5" waste strainer with automatic waste fitting

accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 16

31 588 SD1 stainless steel

K500

Stainless steel sink with drainer

model: K500 80-S 116/50 2.0 rev

mounting type: top mount

material: stainless steel AISI 304 (V2A)

material thickness: 0.7 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 800 mm

dimensions: 1160 x 500 mm

1 bowl: 340 x 420 x 185 mm

2 bowl: 340 x 420 x 185 mm

outer radius: R6 (topmount), inner bowl radius: R90

GROHE FastFixation installation system

sink mountable left or right

cut-out (top mount): 1140 x 480 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5" waste strainer with automatic waste fitting


accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 18

GROHE STAINLESS STEEL SINKS

Ref. no. Colour



31 573 SD1 stainless steel

Minta

Kitchen sink and tap bundle


K500 stainless steel sink with drainer (31 571 SD1)

mounting type: top mount

Minta single-lever sink mixer (32 168)

GROHE Long-Life finish

pull out mousseur spout



31 564 SD1 stainless steel

K200

Stainless steel sink with drainer

model: K200 60-S 96.5/50 1.5 rev

mounting type: top mount

material: stainless steel AISI 304 (V2A)

material thickness: 0.7 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 965 x 500 mm

1 bowl: 346 x 396 x 150 mm

1 bowl: 170 x 320 x 80 mm

outer radius: R10 (topmount), inner bowl radius: R100

GROHE FastFixation installation system

sink mountable left or right

cut-out (top mount): 941 x 476 mm


drilling holes: 2 x 35 mm

waste: Ø 3.5" waste strainer with automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 16



31 565 SD1 stainless steel

Eurosmart


Kitchen sink and tap bundle

K200 stainless steel sink with drainer (31 552 SD1)

mounting type: top mount

Eurosmart single lever sink mixer (33 281 003)

GROHE Long-Life finish



31 562 SD1 stainless steel

Bau

Kitchen sink and tap bundle

K200 stainless steel sink with drainer (31 552 SD1)


mounting type: top mount

Bau Edge single lever sink mixer (31 367 001)

GROHE Long-Life finish

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

GROHE STAINLESS STEEL SINKS



Ref. no.

Colour

31 552 SD1 stainless steel

K200

Stainless steel sink with drainer

model: K200 45-S 86/50 1.0 rev

mounting type: top mount

material: stainless steel AISI 304 (V2A)

material thickness: 0.6 mm

GROHE Long-Life finish

finish: satin finish

GROHE Whisper

min. cabinet size: 450 mm

dimensions: 860 x 500 mm

1 bowl: 350 x 400 x 160 mm

outer radius: R6 (topmount), inner bowl radius: R100

GROHE FastFixation installation system

sink mountable left or right

cut-out (top mount): 842 x 482 mm

drilling holes: 2 x 35 mm

waste: Ø 3.5" waste strainer with automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket


strainer waste, mounting set

optional: push to open excenter (40 986 SD0)


amount of fasteners included (top mount): 14

GROHE STAINLESS STEEL SINKS

Ref. no. Colour




31 720 SD0 stainless steel
K200
Stainless steel sink
model: K200 50-S Ø 44 1.0
 mounting type: top mount
 material: stainless steel AISI 304 (V2A)
GROHE Whisper
 min. cabinet size: 500 mm
 dimensions: Ø 440 mm
 1 bowl: Ø 390 mm
GROHE FastFixation installation system
 cut-out: Ø 422 mm
 drainer: Ø 3.5" basket strainer waste
 accessories included: waste kit, basket strainer waste, mounting set
 amount of fasteners included (top mount): 5




31 719 SD0 stainless steel
K200
Stainless steel sink
model: K200 60-S 53.3/45.8 1.0 rev
 mounting type: top mount
 material: stainless steel AISI 304 (V2A)
GROHE Whisper
 min. cabinet size: 600 mm
 dimensions: 533 x 457 mm
 1 bowl: 436 x 360 mm
 inner bowl radius: R70
GROHE FastFixation installation system
 cut-out: 517 x 442 mm
 drainer: Ø 3.5" basket strainer waste
 accessories included: waste kit, basket strainer waste, mounting set
 amount of fasteners included (top mount): 8

GROHE COMPOSITE SINKS


Ref. no. Colour



31 650 AP0 **granite black**
K700
Composite sink
model: K700 50-C 40/50 1.0
mounting type: top mount
material: quartz composite
GROHE Whisper
min. cabinet size: 500 mm
dimensions: 400 x 500 mm
1 bowl: 350 x 375 x 200 mm
outer radius: R6, inner bowl radius: R45
GROHE FastFixation installation system
cut-out: 380 x 480 mm
drainer: automatic waste fitting
accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set
optional: push to open excenter (40 986 SD0)
amount of fasteners included (top mount): 6
heat resistant up to 180° C





31 651 AP0 **granite black**
K700
Composite sink
model: K700 60-C 56/51 1.0
mounting type: top mount
material: quartz composite
GROHE Whisper
min. cabinet size: 600 mm
dimensions: 560 x 510 mm
1 bowl: 500 x 360 x 200 mm
outer radius: R6, inner bowl radius: R10
GROHE FastFixation installation system
cut-out: 545 x 495 mm
drainer: automatic waste fitting
accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set
optional: push to open excenter (40 986 SD0)
amount of fasteners included (top mount): 8
heat resistant up to 180° C



31 652 AP0 **granite black**
K700
Composite sink
model: K700 80-C 78/51 1.0
mounting type: top mount
material: quartz composite
GROHE Whisper
min. cabinet size: 800 mm
dimensions: 780 x 510 mm
1 bowl: 720 x 370 x 220 mm
outer radius: R6, inner bowl radius: R10
GROHE FastFixation installation system
cut-out: 764 x 494 mm
drainer: automatic waste fitting
accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set
optional: push to open excenter (40 986 SD0)
amount of fasteners included (top mount): 9
heat resistant up to 180° C

GROHE COMPOSITE SINKS



Ref. no.

Colour

31 657 AP0 granite black

K700

Composite sink

model: K700 90-C 83.8/55.9 2.0

mounting type: top mount or undermount

material: quartz composite

GROHE Whisper

min. cabinet size: 900 mm

dimensions: 838 x 559 mm

1 bowl: 406 x 438 x 241 mm

1 bowl: 316 x 438 x 241 mm

outer radius: R6, inner bowl radius: R15

GROHE FastFixation installation system

sink mountable left

cut-out (top mount installation): 818 x 539 mm

cut-out (undermount installation): 757 x 437 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 9

amount of fasteners included (undermount): 9

heat resistant up to 180° C

31 658 AP0 granite black

K700

Composite sink

model: K700 100-C 90/50 2.0 rev

mounting type: top mount

material: quartz composite

GROHE Whisper

min. cabinet size: 1000 mm

dimensions: 900 x 500 mm

1 bowl: 465 x 443 x 230 mm

1 bowl: 315 x 443 x 230 mm

outer radius: R6, inner bowl radius: R8

GROHE FastFixation installation system

sink mountable left or right

cut-out: 880 x 480 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set


optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10

heat resistant up to 180° C

GROHE COMPOSITE SINKS

Ref. no. Colour



31 653 AP0 granite black

K700U

Composite sink

model: K700U 50-C 45.7/40.6 1.0

mounting type: top mount or undermount

material: quartz composite

GROHE Whisper

min. cabinet size: 500 mm

dimensions: 457 x 406 mm

1 bowl: 417 x 366 x 203 mm

outer radius: R6, inner bowl radius: R10

GROHE FastFixation installation system

cut-out (top mount): 442 x 391

cut-out (undermount): 417 x 366 mm

drainer: Ø 3.5" basket strainer waste


accessories included: waste kit, basket strainer waste, mounting set

mounting with silicone (top mount)

optional: push to open excenter (40 986 SD0)

amount of fasteners included (undermount): 8

heat resistant up to 180° C



31 654 AP0 granite black

K700U

Composite sink

model: K700U 60-C 53.3/45.7 1.0

mounting type: top mount or undermount

material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 533 x 457 mm

1 bowl: 469 x 393 x 205 mm

outer radius: R7, inner bowl radius: R10

GROHE FastFixation installation system

cut-out (top mount): 518 x 442 mm

cut-out (undermount): 468 x 390 mm

drainer: Ø 3.5" basket strainer waste


accessories included: waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 6

amount of fasteners included (undermount): 6

heat resistant up to 180° C



31 655 AP0 granite black

K700U

Composite sink

model: K700U 70-C 61/45.7 1.0

mounting type: top mount or undermount

material: quartz composite

GROHE Whisper

min. cabinet size: 700 mm

dimensions: 610 x 460 mm

1 bowl: 544 x 394 x 205 mm

outer radius: R3, inner bowl radius: R10

GROHE FastFixation installation system

cut-out (top mount): 594 x 442 mm

cut-out (undermount): 543 x 393 mm

drainer: Ø 3.5" basket strainer waste

accessories included: waste kit, basket strainer waste, mounting set




optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 6

amount of fasteners included (undermount): 6

heat resistant up to 180° C

GROHE COMPOSITE SINKS



Ref. no.

Colour

31 644 AP0 granite black

K500

Composite sink with drainer

model: K500 50-C 86/50 1.0 rev

mounting type: top mount

material: quartz composite

GROHE Whisper

min. cabinet size: 500 mm

dimensions: 860 x 500 mm

1 bowl: 347 x 440 x 200 mm

outer radius: R6, inner bowl radius: R12

GROHE FastFixation installation system

sink mountable left or right

cut-out: 840 x 480 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 12

heat resistant up to 180° C

31 645 AP0 granite black

K500

Composite sink with drainer

model: K500 60-C 100/50 1.0 rev

mounting type: top mount

material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 1000 x 500 mm

1 bowl: 480 x 440 x 200 mm

outer radius: R6, inner bowl radius: R12

GROHE FastFixation installation system

sink mountable left or right

cut-out: 980 x 480 mm

drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 12

heat resistant up to 180° C

31 646 AP0 granite black

K500

Composite sink with drainer

model: K500 60-C 100/50 1.5 rev

mounting type: top mount

material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 1000 x 500 mm

1 bowl: 345 x 440 x 200 mm

0.5 bowl: 155 x 295 x 146 mm

outer radius: R6, inner bowl radius: big bowl R12, small bowl R10

GROHE FastFixation installation system

sink mountable left or right

cut-out: 980 x 480 mm

drainer: automatic waste fitting


accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 12

heat resistant up to 180° C

GROHE COMPOSITE SINKS



Ref. no.

Colour

31 647 AP0 granite black

K500

Composite sink with drainer

model: K500 80-C 116/50 2.0 rev

mounting type: top mount

material: quartz composite

GROHE Whisper

min. cabinet size: 800 mm

dimensions: 1160 x 500 mm

1 bowl: 330 x 440 x 200 mm

2 bowl: 330 x 440 x 200 mm

outer radius: R6, inner bowl radius: R12

GROHE FastFixation installation system

sink mountable left or right

cut-out: 1140 x 480 mm


drainer: automatic waste fitting

accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 12

heat resistant up to 180° C



31 648 AP0 granite black

K500

Composite sink

model: K500 60-C 55.5/46 1.5 rev

mounting type: top mount or undermount

material: quartz composite

GROHE Whisper

min. cabinet size: 600 mm

dimensions: 555 x 460 mm

1 bowl: 335 x 400 x 200 mm

0.5 bowl: 155 x 400 x 140 mm

outer radius: R6, inner bowl radius: big bowl R12, small bowl R10

GROHE FastFixation installation system

sink mountable left or right

cut-out (top mount): 545 x 444 mm

cut-out (undermount): 525 x 400 mm

drainer: Ø 3.5" basket strainer waste


accessories included: waste kit, basket strainer waste, mounting set

mounting with silicone (top mount)

optional: push to open excenter (40 986 SD0)

amount of fasteners included (undermount): 8

heat resistant up to 180° C



31 649 AP0 granite black

K500

Composite sink

model: K500 90-C 86/50 2.0

mounting type: top mount

material: quartz composite

GROHE Whisper

min. cabinet size: 900 mm

dimensions: 860 x 500 mm

1 bowl: 390 x 430 x 200 mm

2 bowl: 380 x 365 x 200 mm

outer radius: R3, inner bowl radius: R10

GROHE FastFixation installation system

sink mountable left

cut-out: 840 x 480 mm

drainer: automatic waste fitting


accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set

optional: push to open excenter (40 986 SD0)

amount of fasteners included (top mount): 10


heat resistant up to 180° C

GROHE COMPOSITE SINKS




Ref. no. Colour

| | |
|--|---------------|
| 31 639 AP0 | granite black |
| K400 | |
| Composite sink with drainer | |
| model: K400 50-C 78/50 1.0 rev | |
| mounting type: top mount | |
| material: quartz composite | |
| GROHE Whisper | |
| min. cabinet size: 500 mm | |
| dimensions: 780 x 500 mm | |
| 1 bowl: 347 x 440 x 205 mm | |
| outer radius: R6, inner bowl radius: R10 | |
| GROHE FastFixation installation system | |
| sink mountable left or right | |
| cut-out: 765 x 485 mm | |
| drainer: automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 10 | |
| heat resistant up to 180° C | |






| | |
|--|---------------|
| 31 640 AP0 | granite black |
| K400 | |
| Composite sink with drainer | |
| model: K400 50-C 86/50 1.0 rev | |
| mounting type: top mount | |
| material: quartz composite | |
| GROHE Whisper | |
| min. cabinet size: 500 mm | |
| dimensions: 860 x 500 mm | |
| 1 bowl: 337 x 420 x 205 mm | |
| outer radius: R6, inner bowl radius: R10 | |
| GROHE FastFixation installation system | |
| sink mountable left or right | |
| cut-out: 840 x 480 mm | |
| drainer: automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 10 | |
| heat resistant up to 180° C | |



| | |
|--|---------------|
| 31 641 AP0 | granite black |
| K400 | |
| Composite sink with drainer | |
| model: K400 60-C 100/50 1.0 rev | |
| mounting type: top mount | |
| material: quartz composite | |
| GROHE Whisper | |
| min. cabinet size: 600 mm | |
| dimensions: 1000 x 500 mm | |
| 1 bowl: 480 x 420 x 205 mm | |
| outer radius: R6, inner bowl radius: R10 | |
| GROHE FastFixation installation system | |
| sink mountable left or right | |
| cut-out: 980 x 480 mm | |
| drainer: automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 12 | |
| heat resistant up to 180° C | |

GROHE COMPOSITE SINKS



Ref. no.

Colour

| | |
|--|---------------|
| 31 642 AP0 | granite black |
| K400 | |
| Composite sink with drainer | |
| model: K400 60-C 100/50 1.5 rev | |
| mounting type: top mount | |
| material: quartz composite | |
| GROHE Whisper | |
| min. cabinet size: 600 mm | |
| dimensions: 1000 x 500 mm | |
| 1 bowl: 335 x 420 x 205 mm | |
| 0.5 bowl: 155 x 295 x 146 mm | |
| outer radius: R6, inner bowl radius: big bowl R10, small bowl R8 | |
| GROHE FastFixation installation system | |
| sink mountable left or right | |
| cut-out: 980 x 480 mm | |
| drainer: automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 10 | |
| heat resistant up to 180° C | |

| | |
|--|---------------|
| 31 643 AP0 | granite black |
| K400 | |
| Composite sink with drainer | |
| model: K400 80-C 116/50 1.5 rev | |
| mounting type: top mount | |
| material: quartz composite | |
| GROHE Whisper | |
| min. cabinet size: 800 mm | |
| dimensions: 1160 x 500 mm | |
| 1 bowl: 400 x 420 x 205 mm | |
| 2 bowl: 295 x 295 x 205 mm | |
| outer radius: R6, inner bowl radius: R10 | |
| GROHE FastFixation installation system | |
| sink mountable left or right | |
| cut-out: 1140 x 480 mm | |
| drainer: automatic waste fitting | |
| accessories included: automatic waste fitting with rotary handle, waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 10 | |
| heat resistant up to 180° C | |

| | |
|--|---------------|
| 31 656 AP0 | granite black |
| K200 | |
| Composite sink | |
| model: K200 50-C 51 1.0 | |
| mounting type: top mount | |
| material: quartz composite | |
| GROHE Whisper | |
| min. cabinet size: 500 mm | |
| dimensions: Ø 510 mm | |
| 1 bowl: Ø 380 x 200 mm | |
| inner bowl radius: Ø 380 mm | |
| GROHE FastFixation installation system | |
| cut-out: Ø 490 mm | |
| drainer: automatic waste fitting | |
| accessories included: waste kit, basket strainer waste, mounting set | |
| optional: push to open excenter (40 986 SD0) | |
| amount of fasteners included (top mount): 3 | |
| heat resistant up to 180° C | |

GROHE KITCHEN SINK ACCESSORIES

| | Ref. no. | Colour |
|---|---|---|
|  | 40 996 GN0 40 996 DL0 40 996 AL0 | brushed cool sunrise brushed warm sunset brushed hard graphite |
| | Waste set sink with excenter for 1 bowl sinks consisting of: cover element overflow cap, cover square sieve automatic waste set cap, cover round fits to: 31 639, 31 640, 31 641, 31 644, 31 645, 31 651, 31 652 | |
|  | 40 997 GN0 40 997 DL0 40 997 AL0 | brushed cool sunrise brushed warm sunset brushed hard graphite |
| | Waste set sink without excenter for 1 bowl and 1.5 bowl sinks consisting of: cover element overflow sieve manual waste set automatic waste set fits to: 31 648, 31 653, 31 654, 31 655 | |
|  | 40 998 GN0 40 998 DL0 40 998 AL0 | brushed cool sunrise brushed warm sunset brushed hard graphite |
| | Waste set sink with excenter for 2 bowls sinks consisting of: cover element overflow sieve manual waste set automatic waste set cap, cover round cap, cover square fits to: 31 642, 31 643, 31 646, 31 647, 31 649, 31 657 | |
|  | 40 999 GN0 40 999 DL0 40 999 AL0 | brushed cool sunrise brushed warm sunset brushed hard graphite |
| | Waste set sink with excenter for 2 bowls sinks consisting of: cover element overflow sieve manual waste set automatic waste set cap, cover square fits to: 31 658 | |
|  | 40 400 GN0 40 400 DL0 40 400 AL0 | brushed cool sunrise brushed warm sunset brushed hard graphite |
| | Waste set sink with excenter for 1 bowl sinks consisting of: frame set, overflow automatic waste set sieve cap, cover square fits to: 31 656, 31 650 | |
|  | 40 986 SD0 40 986 GN0 40 986 DL0 40 986 AL0 | stainless steel brushed cool sunrise brushed warm sunset brushed hard graphite |
| | Waste set for kitchen sinks round pop-up with push control space saving waste set including strainer plug Ø 35 mm cut-out diameter fits all kitchen sink series | |

GROHE SPECIAL FAUCETS



CONTENTS

| | | |
|----------------------|---------------------------|-----|
| Electronic fittings | Eurocube E | 392 |
| | Essence E | 394 |
| | Europlus E | 397 |
| | Eurosmart Cosmopolitan E | 399 |
| | Euroeco Cosmopolitan E | 405 |
| | Bau Cosmopolitan E | 407 |
| Special thermostats | Grohtherm Micro | 409 |
| | Grohtherm Special | 410 |
| Single-lever mixers | Euroeco Special | 412 |
| | Euroeco Single Sequential | 413 |
| Self-closing faucets | Eurosmart Cosmopolitan T | 414 |
| | Euroeco Cosmopolitan T | 415 |

SYSTEM REQUIREMENTS FOR ELECTRONIC FAUCETS WITH BLUETOOTH

Apple iOS 8.0 or higher
Android 4.3 or higher


Mobile devices and GROHE IR Remote App*** are not included in delivery and have to be ordered separately via an authorised Apple store/store/iTunes or Google Play store.

* The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Grohe AG is under license. Other trademarks and trade names are those of their respective owners.

** Apple, the Apple logo, iPod, iPod Touch, iPhone and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. Apple is not responsible for the function of this device or its compliance with safety and regulatory standards.

*** Available for free via iTunes app or Google Play store.

GROHE EUROCUBE E



Ref. no.

Colour

36 440 000

chrome

Eurocube E

Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter
with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

with plug transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

laminar spray regulator

flexible connection hoses

non-return valve, dirt strainers

integrated solenoid valve


rapid installation system

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59K



36 441 000

chrome

36 441 DC0

supersteel

36 441 AL0

brushed hard graphite

Eurocube E

Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter
with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

laminar spray regulator

flexible connection hoses

non-return valve, dirt strainers

integrated solenoid valve

external battery

rapid installation system

multistage battery status display


7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved

type of protection faucet IP 59K



36 442 000

chrome

Eurocube E

Infra-red electronic wall basin tap without mixing device
with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

for cold or premixed water

with transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

laminar spray regulator

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

for use with Rapid SL 38 748 002 or roughing-in set 36 264 001


CE approved

36 264 001

Rough-in box for infra-red electronic wall basin tap without mixing device

GROHE EUROCUBE E

Ref. no. Colour




38 748 002

Rapid SL

Element for wash basin with rough-in set for infra-red electronic
suitable for trim sets Essence E 36 447 000 and Eurocube E 36 442 000

1.13 m installation height

for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
wash basin fixing bolts M10 with fixing device for ceramic
variable distance of fixing bolts
HT-outlet bend Ø 50 mm
seal Ø 32 mm
pre-mounted roughing-in set with protecting block
fire-proof pipe for laying electronic cables
installation box with water group, stop valve and flush elbow
connection with noise protected fitting holder 1/2"
connecting box for mains supply 230 V
CE approved
for installation with pre-mixed or cold water
for on-the-wall installation 38 558 00M needs to be ordered separately



36 407 001 chrome

Remote control

for all GROHE one eye infra-red products as of 06/2015
monitoring

consumption and usage data
thermal disinfection cycles

auto flush cycles

configuration
cleaning mode on/off
thermal disinfection
detection range
shut off delay
auto flush

service


send and save profile
reset to factory or user settings
service details, demo mode
3 x 1.5 V DC (AAA) battery supply



36 340 000

Power extension cable

length 3.00 m




36 338 000

Switch-mode power supply


for one eye infra-red wash basin mixer
switch-mode power supply with operating voltage
100-230 V AC, 50 - 60 Hz
for concealed socket with cover and strain relief

GROHE ESSENCE E




Ref. no. Colour

| | |
|---|--------|
| 36 444 000 | chrome |
| Essence E | |
| Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter | |
| with infrared sensor for bi-directional communication for monitoring, configuration and service purpose | |
| with plug transformer 100-230 V AC, 50-60 Hz, 6 V DC | |
| GROHE Long-Life finish | |
| adjustable swivel area 0° / 150° / 360° | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| flexible connection hoses | |
| non-return valve, dirt strainers, integrated solenoid valve | |
| rapid installation system | |
| 7 pre-set programs: | |
| auto flush, thermal disinfection, cleaning mode | |
| additional functions and precise settings by remote control 36 407 | |
| CE approved, type of protection faucet IP 59K | |




| | |
|------------|-----------------------|
| 36 445 000 | chrome |
| 36 445 DCO | supersteel |
| 36 445 GLO | cool sunrise |
| 36 445 GNO | brushed cool sunrise |
| 36 445 DAO | warm sunset |
| 36 445 DLO | brushed warm sunset |
| 36 445 A00 | hard graphite |
| 36 445 AL0 | brushed hard graphite |

| | |
|---|--|
| Essence E | |
| Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter | |
| with infrared sensor for bi-directional communication for monitoring, configuration and service purpose | |
| 6V lithium battery, type CR-P2 | |
| battery lifetime: approx. 7 years (150 actuations a day) | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| adjustable swivel area 0° / 150° / 360° | |
| laminar spray regulator | |
| flexible connection hoses | |
| non-return valve, dirt strainers, integrated solenoid valve | |
| external battery | |
| rapid installation system | |
| multistage battery status display | |
| 7 pre-set programs: | |
| auto flush, thermal disinfection, cleaning mode | |
| additional functions and precise settings by remote control 36 407 | |
| CE approved, type of protection faucet IP 59K | |



| | |
|---|--------|
| 36 446 000 | chrome |
| Essence E | |
| Infra-red electronic basin tap 1/2" without mixing device | |
| with infrared sensor for bi-directional communication for monitoring, configuration and service purpose | |
| for cold or premixed water | |
| 6V lithium battery, type CR-P2 | |
| battery lifetime: approx. 7 years (150 actuations a day) | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| adjustable swivel area 0° / 150° / 360° | |
| laminar spray regulator | |
| flexible connection hose | |
| dirt strainers, integrated solenoid valve | |
| external battery | |
| rapid installation system | |
| multistage battery status display | |
| 7 pre-set programs: | |
| auto flush, thermal disinfection, cleaning mode | |
| additional functions and precise settings by remote control 36 407 | |
| CE approved, type of protection faucet IP 59K | |

GROHE ESSENCE E



Ref. no.

Colour

36 447 000

chrome

Essence E

Infra-red electronic wall basin tap without mixing device
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose
for cold or premixed water

with transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode


additional functions and precise settings by remote control 36 407

for use with Rapid SL 38 748 002 or roughing-in set 36 264 001

CE approved

36 264 001

Rough-in box for infra-red electronic wall basin tap without mixing device



38 748 002

Rapid SL

Element for wash basin with roughing-in set for infra-red electronic
suitable for trim sets Essence E 36 447 000 and Eurocube E 36 442 000

1.13 m installation height

for on-the-wall installations or studded walls

powder coated steel frame, self-supporting

for dry-cladding, completely pre-assembled

wash basin fixing bolts M10 with fixing device for ceramic

variable distance of fixing bolts

HT-outlet bend Ø 50 mm

seal Ø 32 mm

pre-mounted roughing-in set with protecting block

fire-proof pipe for laying electronic cables

installation box with water group, stop valve and flush elbow


connection with noise protected fitting holder 1/2"

connecting box for mains supply 230 V

CE approved

for installation with pre-mixed or cold water

for on-the-wall installation 38 558 00M needs to be ordered separately



36 407 001

chrome

Remote control

for all GROHE one eye infra-red products as of 06/2015
monitoring

consumption and usage data

thermal disinfection cycles

auto flush cycles

configuration

cleaning mode on/off

thermal disinfection

detection range

shut off delay

auto flush

service

send and save profile

reset to factory or user settings

service details, demo mode

3 x 1.5 V DC (AAA) battery supply



36 340 000


Power extension cable

length 3.00 m

GROHE ESSENCE E

Ref. no.

Colour






36 338 000

Switch-mode power supply

for one eye infra-red wash basin mixer
switch-mode power supply with operating voltage
100-230 V AC, 50 - 60 Hz
for concealed socket with cover and strain relief

GROHE EUROPLUS E



Ref. no.

Colour

36 207 001 chrome

Europlus E

Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses

non-return valve, dirt strainers, solenoid valve

rapid installation system

multistage battery status display

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59K

36 208 001 chrome
ditto, without mixing device

36 015 001 chrome

Europlus E

Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

with plug transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses

non-return valve, dirt strainers, solenoid valve

rapid installation system

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59K

36 016 001 chrome
ditto, without mixing device

36 407 001 chrome

Remote control

for all GROHE one eye infra-red products as of 06/2015

monitoring

consumption and usage data

thermal disinfection cycles

configuration

cleaning mode on/off

thermal disinfection

detection range

shut off delay

auto flush

service

send and save profile

reset to factory or user settings

service details, demo mode

3 x 1.5 V DC (AAA) battery supply

36 340 000


Power extension cable

length 3.00 m

GROHE EUROPLUS E

Ref. no.

Colour



36 338 000

Switch-mode power supply

for one eye infra-red wash basin mixer
switch-mode power supply with operating voltage
100-230 V AC, 50 - 60 Hz
for concealed socket with cover and strain relief



36 209 000

chrome


Hidden mixing device

vandal-proof, covered and pre-adjustable mixer
special mixing device
adjustment by screwdriver
metallic cap
GROHE Long-Life finish

GROHE EUROSMART COSMOPOLITAN E

Ref. no.

Colour



36 327 002

chrome

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses

non-return valve, dirt strainers, integrated solenoid valve

external battery

rapid installation system

multistage battery status display


7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59


replaces 36 327 001



36 331 001

chrome

ditto, with pop-up waste set 1 1/4"



36 422 001

chrome

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer 1/2" L-Size with mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses

non-return valve, dirt strainers, integrated solenoid valve

external battery

rapid installation system

multistage battery status display


7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59

replaces 36 422 000



36 325 002

chrome

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer 1/2" with mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose with plug transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses

non-return valve, dirt strainers, integrated solenoid valve

rapid installation system

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407


CE approved, type of protection faucet IP 59

replaces 36 325 001

GROHE EUROSMART COSMOPOLITAN E

Ref. no.

Colour



36 421 001

chrome

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer 1/2" L-Size with mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose with plug transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses

non-return valve, dirt strainers, integrated solenoid valve

rapid installation system


7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59

replaces 36 421 000



36 439 001

chrome

Eurosmart Cosmopolitan E

Infra-red electronic basin tap 1/2" without mixing device

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose for cold or premixed water

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hose

dirt strainers, integrated solenoid valve

external battery

rapid installation system

multistage battery status display


7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59

replaces 36 439 000



36 330 002

chrome

Eurosmart Cosmopolitan E

Infra-red electronic basin mixer 1/2" with hidden mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses

non-return valve, dirt strainers, integrated solenoid valve

external battery

rapid installation system

multistage battery status display

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59

replaces 36 330 001

GROHE EUROSMART COSMOPOLITAN E

Ref. no.

Colour



36 386 001 chrome

Eurosmart Cosmopolitan E Powerbox

infra-red electronic basin mixer with mixing device and adjustable temperature limiter

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose including Powerbox self-generating power system

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5.5 l/min

including all flexible connection hoses

non-return valve, dirt strainers

rapid installation system

power generator with water turbine

internal energy saving unit

with use of 60 s/24 h stand-by, 260 s/100 h stand-by

with additional backup power

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved

36 454 000 chrome

Eurosmart Cosmopolitan E Special

Infra-red electronic wall basin mixer

with thermostatic temperature control

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

activation by hand, deactivation automatically when leaving detection zone

two additional detection modes adjustable (hand-hand or body-body)

GROHE Long-Life finish

maximum flow rate (at 3 bar): 8 l/min

GROHE CoolTouch

non-return valve, dirt strainers

GROHE SafetyPlus

fixed temperature stop

temperature scale handle with internal safety stop between 35C and 43C

full unmixed hot or cold water in extreme handle position for legionella sampling

projection 287 mm, swivel range stop at 130°

with S-unions and with covers, self-sealing escutcheons

multistage battery status display

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved

36 455 000 chrome

ditto, projection 255 mm

36 332 000 chrome

Eurosmart Cosmopolitan E

Infra-red electronic wall basin mixer

with thermostatic temperature control

with infrared sensor for bi-directional communication for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

activation by hand, deactivation automatically when leaving detection zone

two additional detection modes adjustable (hand-hand or body-body)

GROHE Long-Life finish

maximum flow rate (at 3 bar): 8 l/min

GROHE CoolTouch

non-return valve, dirt strainers

GROHE SafeStop

at 38C projection 287 mm, swivel range stop at 130°

with S-unions and with covers, self-sealing escutcheons

multistage battery status display

7 pre-set programs:



auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved

36 333 000 chrome


ditto, projection 255 mm



GROHE EUROSMART COSMOPOLITAN E

Ref. no.


Colour



13 378 000 chrome

Cast swivel spout
length 115 mm
swivelling (180 or 90°) and lockable
laminar flow limiter 9 l/min
GROHE Long-Life finish

13 380 000 chrome
ditto, length 175 mm




36 334 SDO stainless steel

Eurosmart Cosmopolitan E
Infra-red electronic wall basin tap without mixing device
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose
for cold or premixed water
with transformer 100-230 V AC, 50-60 Hz, 6 V DC
maximum flow rate (at 3 bar): 8 l/min
stainless steel escutcheon
SuperSteel spout, projection 232 mm
7 pre-set programs:
auto flush, thermal disinfection, cleaning mode
additional functions and precise settings by remote control 36 407
set for final installation for concealed fitting box 36 336 001/36 337 001
CE approved

36 335 SDO stainless steel
ditto, projection 172 mm

36 337 001
Rough-in box for infra red basin taps without mixing device

36 336 001
Rough-in box with integrated thermostatic mixer for infra red trim sets



36 376 000 chrome

Eurosmart Cosmopolitan E
Infra-red electronic basin mixer with mixing device and adjustable temperature limiter
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose
with transformer 100-230 V AC, 50-60 Hz, 6 V DC
GROHE Long-Life finish
maximum flow rate (at 3 bar): 8 l/min
laminar flow straightener
chrome escutcheon, chrome spout, projection 232 mm
7 pre-set programs:
auto flush, thermal disinfection, cleaning mode
additional functions and precise settings by remote control 36 407
set for final installation for concealed fitting box 36 339 001
CE approved


36 315 000 chrome
ditto, projection 172 mm

36 339 001
Rough-in box with mixing device for infra red trim sets

GROHE EUROSMART COSMOPOLITAN E

Ref. no.

Colour



36 457 000

chrome

Eurosmart Cosmopolitan E Special

Infra-red electronic shower mixer with thermostatic temperature control
with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

ergonomic metal handle

GROHE Long-Life finish

GROHE CoolTouch

non-return valve, dirt strainers

GROHE SafetyPlus fixed temperature stop

temperature scale handle with internal safety stop between 35C and 43C

full unmixed hot or cold water in extreme handle position for legionella sampling

shower bottom outlet with integrated non return-valve

with S-unions and with covers, self-sealing escutcheons


multistage battery status display

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved



36 456 000

chrome

Eurosmart Cosmopolitan E Special

Infra-red electronic for concealed shower thermostat

with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

for concealed installation box 36 458 000 and 36 459 000

ergonomic metal handle

GROHE Long-Life finish

GROHE SafetyPlus fixed temperature stop

temperature scale handle with internal safety stop between 35C and 43C

full unmixed hot or cold water in extreme handle position for legionella sampling

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407


CE approved

36 458 000

Rough-in box with integrated thermostatic mixer for shower trim sets,
battery supply

36 459 000

Rough-in box with integrated thermostatic mixer for shower trim sets,
mains supply



36 463 000

chrome

Eurosmart Cosmopolitan E

Infra-red electronic for concealed shower thermostat

with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

for concealed installation box 36 416 000 and 36 464 000

for hidden thermostatic mixer

GROHE Long-Life finish

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved

36 464 000

Rough-in box with integrated thermostatic mixer for shower trim sets,
battery supply


36 416 001

Rough-in box with integrated thermostatic mixer for infra red shower
trim sets, mains supply

GROHE EUROSMART COSMOPOLITAN E

Ref. no.

Colour



36 407 001

chrome

Remote control

for all GROHE one eye infra-red products as of 06/2015

monitoring

consumption and usage data

thermal disinfection cycles

auto flush cycles

configuration

cleaning mode on/off

thermal disinfection

detection range

shut off delay

auto flush


service

send and save profile

reset to factory or user settings

service details, demo mode


3 x 1.5 V DC (AAA) battery supply



36 340 000

Power extension cable

length 3.00 m



36 338 000

Switch-mode power supply


for one eye infra-red wash basin mixer

switch-mode power supply with operating voltage

100-230 V AC, 50 - 60 Hz

for concealed socket with cover and strain relief

GROHE EUROECO COSMOPOLITAN E



Ref. no.

Colour

36 271 000

chrome

Euroeco Cosmopolitan E

Infra-red electronic basin tap without mixing device
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose

for cold or premixed water

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses, dirt strainers

external solenoid valve, external battery

rapid installation system


multistage battery status display

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59K



36 269 000

chrome

Euroeco Cosmopolitan E

Infra-red electronic basin tap 1/2" without mixing device
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose

for cold or premixed water

with plug transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

flexible connection hoses, dirt strainers

external solenoid valve


rapid installation system

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved, type of protection faucet IP 59K



36 274 000

chrome

Euroeco Cosmopolitan E

Infra-red electronic wall basin tap without mixing device
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose

for cold or premixed water

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min


multistage battery status display

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

CE approved



36 273 000

chrome

Euroeco Cosmopolitan E

Infra-red electronic wall basin tap without mixing device
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose

for cold or premixed water

with transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow

maximum flow rate (at 3 bar): 5 l/min

chrome escutcheon, chrome spout, projection 172 mm

7 pre-set programs:

auto flush, thermal disinfection, cleaning mode

additional functions and precise settings by remote control 36 407

set for final installation for concealed fitting box 36 336 001/36 337 001

CE approved

36 337 001
Rough-in box for infra red basin taps without mixing device


36 336 001

Rough-in box with integrated thermostatic mixer for infra red trim sets

GROHE EUROECO COSMOPOLITAN E

Ref. no.

Colour



36 407 001

chrome

Remote control

for all GROHE one eye infra-red products as of 06/2015

monitoring

consumption and usage data

thermal disinfection cycles

auto flush cycles

configuration

cleaning mode on/off

thermal disinfection

detection range

shut off delay

auto flush

service

send and save profile

reset to factory or user settings

service details, demo mode


3 x 1.5 V DC (AAA) battery supply



36 340 000

Power extension cable

length 3.00 m



36 338 000

Switch-mode power supply

for one eye infra-red wash basin mixer


switch-mode power supply with operating voltage

100-230 V AC, 50 - 60 Hz


for concealed socket with cover and strain relief

GROHE BAU COSMOPOLITAN E


Ref. no. Colour



| | |
|--|--------|
| 36 451 000 | chrome |
| Bau Cosmopolitan E | |
| Infra-red electronic basin mixer 1/2" | |
| with mixing device and temperature limiter | |
| with infrared sensor for bi-directional communication | |
| for monitoring, configuration and service purpose | |
| 6V lithium battery, type CR-P2 | |
| battery lifetime: approx. 7 years (150 actuations a day) | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| Lead and Nickel Free Inner Water Ways | |
| body made of composite polymer | |
| flexible connection hoses | |
| non-return valve, dirt strainers | |
| integrated solenoid valve | |
| external battery | |
| rapid installation system | |
| multistage battery status display | |
| 7 pre-set programs: | |
| auto flush, thermal disinfection, cleaning mode | |
| additional functions and precise settings by remote control 36 407 | |
| CE approved | |
| type of protection faucet IP 59 | |



| | |
|--|--------|
| 36 452 000 | chrome |
| Bau Cosmopolitan E | |
| Infra-red electronic basin tap 1/2" without mixing device | |
| with infrared sensor for bi-directional communication | |
| for monitoring, configuration and service purpose | |
| for cold or premixed water | |
| 6V lithium battery, type CR-P2 | |
| battery lifetime: approx. 7 years (150 actuations a day) | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| Lead and Nickel Free Inner Water Ways | |
| body made of composite polymer | |
| flexible connection hose | |
| dirt strainers | |
| integrated solenoid valve | |
| external battery | |
| rapid installation system | |
| multistage battery status display | |
| 7 pre-set programs: | |
| auto flush, thermal disinfection, cleaning mode | |
| additional functions and precise settings by remote control 36 407 | |
| CE approved | |
| type of protection faucet IP 59 | |




| | |
|--|--------|
| 36 453 000 | chrome |
| Bau Cosmopolitan E | |
| Infra-red electronic basin mixer 1/2" | |
| with mixing device and temperature limiter | |
| with infrared sensor for bi-directional communication | |
| for monitoring, configuration and service purpose | |
| with plug transformer 100-230 V AC, 50-60 Hz, 6 V DC | |
| GROHE Long-Life finish | |
| GROHE Water Saving - Less water, perfect flow | |
| maximum flow rate (at 3 bar): 5 l/min | |
| Lead and Nickel Free Inner Water Ways | |
| body made of composite polymer | |
| flexible connection hoses | |
| non-return valve, dirt strainers | |
| integrated solenoid valve | |
| rapid installation system | |
| 7 pre-set programs: | |
| auto flush, thermal disinfection, cleaning mode | |
| additional functions and precise settings by remote control 36 407 | |
| CE approved | |
| type of protection faucet IP 59 | |

GROHE BAU COSMOPOLITAN E

Ref. no.

Colour



36 407 001

chrome

Remote control

for all GROHE one eye infra-red products as of 06/2015

monitoring

consumption and usage data

thermal disinfection cycles

auto flush cycles

configuration

cleaning mode on/off

thermal disinfection

detection range

shut off delay

auto flush

service

send and save profile

reset to factory or user settings

service details, demo mode


3 x 1.5 V DC (AAA) battery supply



36 340 000

Power extension cable

length 3.00 m



36 338 000

Switch-mode power supply

for one eye infra-red wash basin mixer

switch-mode power supply with operating voltage

100-230 V AC, 50 - 60 Hz


for concealed socket with cover and strain relief

GROHE

GROHTHERM MICRO

Ref. no.

Colour



34 487 000

chrome

Grohtherm Micro


Safety Mixer

temperature adjustment 15-43° C ($\pm 2^\circ \text{C}$)
thermal disinfection without re-adjustment of temperature
connection 3/8" below with cap nut
above 3/8" male thread

GROHE TurboStat

GROHE Long-Life finish

built-in non-return valves
dirt strainers
without connection set
max. pressure differential 5:1



47 533 000

chrome

Grohtherm Micro


Connection set

for Grohtherm Micro
union nut 3/8"
T-unit
2 outlets 3/8" male thread
flexible connection hose
union nuts
GROHE Long-Life finish


GROHE

GROHTHERM SPECIAL


Ref. no. Colour




34 667 000 chrome
Grohterm Special Shower Safety mixer
 wall mounted
 ergonomic handles, ceramic headparts 1/2", 90°
GROHE TurboStat compact cartridge
 temperature scale handle with internal safety stop between 35C and 43C
 easy thermal disinfection via optional key 47 994 000
 integrated stop valve
 shower bottom outlet with integrated non return-valve
 dirt strainers, with S-unions and with covers
GROHE FastFixation for fast exchange of non return valves in connections
100% GROHE CoolTouch safety housing with CoolTouch escutcheons
GROHE Long-Life finish
GROHE SafetyPlus fixed temperature stop



34 665 000 chrome
Grohterm Special Bath Safety Mixer
 wall mounted
 ergonomic handles
 Aquadimmer handle with multiple function
 flow control, integrated stop valve, diverter bath/shower
GROHE TurboStat compact cartridge
 temperature scale handle with internal safety stop between 35C and 43C
 easy thermal disinfection via optional key 47 994 000
 shower bottom outlet with integrated non return-valve
 laminar mousseur
 dirt strainers, with S-unions and with covers
GROHE FastFixation for fast exchange of non return valves in connections
100% GROHE CoolTouch safety housing with CoolTouch escutcheons
GROHE Long-Life finish
GROHE SafetyPlus fixed temperature stop




34 020 001 chrome
Grohterm Special Basin Safety mixer 1/2"
 wall mounted
 ergonomic metal lever 250 mm for elbow actuation, swivel area 100°
 ceramic headpart 1/2"
GROHE TurboStat compact cartridge
GROHE SafetyPlus ergonomic metal temperature handle with pre-adjustable safety stop between 35°C and 43°C
 easy thermal disinfection via optional key 47 994 000
 cast spout with reinforced bearing, swivel area 90°
 laminar flow limiter 9 l/min
 built-in non-return valves and dirt strainers
 projection 255 mm
 covered S-unions
 shut-off position
GROHE Long-Life finish



34 666 000 chrome
Grohterm Special Basin Safety mixer 1/2"
 wall mounted
 ergonomic handles, ceramic headparts 1/2", 90°
GROHE TurboStat compact cartridge
 temperature scale handle with internal safety stop between 35C and 43C
 easy thermal disinfection via optional key 47 994 000
 integrated stop valve
 bottom outlet for spouts 13 378 or 13 380
 dirt strainers, with S-unions and with covers
GROHE FastFixation for fast exchange of non return valves in connections
100% GROHE CoolTouch safety housing with CoolTouch escutcheons
GROHE Long-Life finish
GROHE SafetyPlus fixed temperature stop

GROHE GROHTHERM SPECIAL







Ref. no. Colour

13 378 000 chrome

Cast swivel spout
length 115 mm
swivelling (180 or 90°) and lockable
laminar flow limiter 9 l/min
GROHE Long-Life finish

13 380 000 chrome
ditto, length 175 mm

GROHE EUROECO SPECIAL



Colour

Ref. no.

32 763 000 chrome
Euroeco Special
Single-lever basin mixer 1/2"
pop-up waste set 1 1/4"
GROHE Long-Life finish
GROHE SilkMove 35 mm ceramic cartridge
maximum flow rate (at 3 bar): 8 l/min
adjustable flow rate limiter
adjustable temperature limiter
laminar flow straightener
lever length 120 mm
rapid installation system
flexible connection hoses

32 762 000 chrome
ditto, smooth body

32 765 000 chrome
Euroeco Special
Single-lever basin mixer 1/2"
smooth body
high version
GROHE Long-Life finish
GROHE SilkMove 46 mm ceramic cartridge
maximum flow rate (at 3 bar): 8 l/min
adjustable flow rate limiter
adjustable temperature limiter
laminar flow straightener
lever length 120 mm
rapid installation system
flexible connection hoses


32 778 000 chrome
Euroeco Special
Single-lever basin mixer 1/2"
wall mounted
GROHE Long-Life finish
GROHE SilkMove 46 mm ceramic cartridge
maximum flow rate (at 3 bar): 8 l/min
adjustable flow rate limiter
adjustable temperature limiter
laminar flow straightener
cast spout
projection 205 mm
lever length 170 mm
S-unions

32 767 000 chrome
Euroeco Special
Single-lever basin mixer 1/2"
wall mounted
GROHE Long-Life finish
GROHE SilkMove 46 mm ceramic cartridge
maximum flow rate (at 3 bar): 8 l/min
adjustable flow rate limiter
adjustable temperature limiter
laminar flow straightener
cast swivel spout, lockable
swivel area 90°
projection 197 mm
lever length 120 mm
S-unions

GROHE EUROECO SINGLE SEQUENTIAL

Ref. no.

Colour



32 788 000

chrome

Euroeco Special

Single-lever safety basin mixer 1/2"

pop-up waste set 1 1/4"

GROHE Long-Life finish

maximum flow rate (at 3 bar): 8 l/min

ceramic cartridge

adjustable flow rate limiter

adjustable temperature limiter


laminar flow straightener

lever length 120 mm

rapid installation system

flexible connection hoses

32 789 000
ditto, smooth body



32 790 000

chrome

Euroeco Single Sequential

Single-lever safety basin mixer 1/2"

smooth body

high version

GROHE Long-Life finish

maximum flow rate (at 3 bar): 8 l/min

ceramic cartridge

adjustable flow rate limiter


adjustable temperature limiter

laminar flow straightener

lever length 120 mm

rapid installation system

flexible connection hoses



32 795 000

chrome

Euroeco Single Sequential

Single-lever safety basin mixer 1/2"

wall mounted

GROHE Long-Life finish

maximum flow rate (at 3 bar): 8 l/min

ceramic cartridge

adjustable flow rate limiter


adjustable temperature limiter

cast spout with flow straightener

projection 204 mm

lever length 170 mm

S-unions



32 792 000

chrome

Euroeco Single Sequential

Single-lever safety basin mixer 1/2"

wall mounted

GROHE Long-Life finish

maximum flow rate (at 3 bar): 8 l/min

ceramic cartridge

adjustable flow rate limiter

adjustable temperature limiter

cast swivel spout, lockable with flow straightener

swivel area 90°

projection 197 mm


lever length 120 mm

S-unions

GROHE EUROSMART COSMOPOLITAN T

Ref. no.

Colour



36 318 000

chrome

Eurosmart Cosmopolitan T
Self-closing basin mixer with mixing device
and adjustable temperature limiter

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
pop-up waste set 1 1/4"

3 adjustable flow times: short - medium - long
(factory setting: short), approx. 7, 15, 30 sec
(pressure dependent)


pressure range 0.5 to 6 bar

flexible connection hoses

non-return valve

dirt strainers

36 317 000 chrome
ditto, without pop-up waste set



36 320 000

chrome

Eurosmart Cosmopolitan T
Self-closing shower mixer 1/2" with mixing device
and adjustable temperature limiter

wall mounted

GROHE Long-Life finish

mixing device with hot water stop-valve
hose connection G 1/2"

3 adjustable flow times: short - medium - long
(factory setting: medium), approx. 7, 15, 30 sec
(pressure dependent)

pressure range 0.5 to 6 bar

S-unions

non-return valve

dirt strainers

36 321 000 chrome

Eurosmart Cosmopolitan T
Self-closing shower mixer 1/2" with mixing device
and adjustable temperature limiter

GROHE Long-Life finish


3 adjustable flow times: short - medium - long
(factory setting: medium), approx. 7, 15, 30 sec
(pressure dependent)

pressure range 0.5 to 6 bar

dirt strainers

without concealed body


36 322 001
Rough-in box with mixing device for self-closing trim sets



GROHE EUROECO COSMOPOLITAN T

Ref. no.

Colour




36 265 000

chrome

**Euroeco Cosmopolitan T
Self-closing pillar tap 1/2"**

for cold or premixed water
marking: blue/red
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
3 adjustable flow times: short - medium - long
(factory setting: short), approx. 7, 15, 30 sec
(pressure dependent)




36 266 000

chrome

**Euroeco Cosmopolitan T
Self-closing pillar tap 1/2"**

wall mounted
for cold or premixed water
marking: blue/red
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
maximum flow rate (at 3 bar): 5 l/min
flow limiter
3 adjustable flow times: short - medium - long
(factory setting: short), approx. 7, 15, 30 sec
(pressure dependent)




36 268 000

chrome

**Euroeco Cosmopolitan T
Self-closing shower valve 1/2"**

for concealed installation
for cold or premixed water
marking: blue/red
GROHE Long-Life finish
3 adjustable flow times: short - medium - long
(factory setting: medium), approx. 7, 15, 30 sec
(pressure dependent)



36 267 000

chrome

**Euroeco Cosmopolitan T
Self-closing shower valve 1/2"**

exposed installation
for cold or premixed water
marking: blue/red
GROHE Long-Life finish
3 adjustable flow times: short - medium - long
(factory setting: medium), approx. 7, 15, 30 sec
(pressure dependent)

GROHE SENSSA SMART TOILETS






CONTENTS

- GROHE Sensia Pro
GROHE Sensia Arena

418
420

GROHE SENSIA PRO



Ref. no.

Colour

36 508 SH0

alpine white

GROHE Sensia Pro

Smart Toilet for concealed flushing cisterns, wall-hung

GROHE Hygiene Clean: with antibacterial glazing HyperClean (SIAA Kokin

Japanese standard compliant) and non-stick coating AquaCeramic

GROHE Power Flush: rimless wash down with GROHE Triple Vortex flushing

GROHE Skin Clean:

2 adjustable spray arms (1 for standard spray, 1 for lady spray)

separate water way for lady spray

oscillating spray (automatic forward and reverse motion of the spray)

adjustable spray intensity

automatic pre- and post-rinsing of spray nozzle with fresh water

integrated instant heater provides unlimited warm water

adjustable temperature

warm air dryer with adjustable temperature

descaling function

PP WC seat and lid with automatic opening/close function

pyro electric sensor for user detection

inside bowl night light

hidden water supply and power supply connections

manual remote controller with wall-mounted holder

water supply connection set for concealed cistern

nominal voltage 220-240 V AC, main frequency 50-60 Hz

type of protection IPX4, complies with EN 1717, CE approved

39 596 000

Rapid SLX

Element for WC, 1.13 m installation height with integrated socket and shower toilet connection

flushing cistern GDX, 6 l

small revision shaft for small flush plates

for on-the-wall installations or studded walls

powder coated steel frame, self-supporting

for dry-cladding, completely pre-assembled

TÜV approved

2 WC fixing bolts

distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GDX, 6 l, containing following features:

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

water supply from right, back or top

low noise (group I acc. to German Noise Specification)

fully insulated against condensation

1/2" water supply connection including integrated angle valve and push fit

flexible hose union

no tools required for installation of inspection shaft, for vertical use


including flow manager

prevents overspill in rimless toilets

easy flow regulation via inspection shaft without removing the valves

for on-the-wall installation 38 558 00M needs to be ordered separately

for flush plates 156x197 mm revision shaft 66 791 needs to be ordered

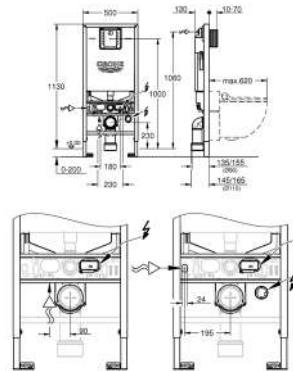

39 598 000

Rapid SLX

3-in-1 set for WC, 1.13 m installation height

flushing cistern GDX, 6 l


Rapid SLX element for WC (39 596 000) with integrated power socket

wall brackets (38 558 00M)

noise protection (37 131 000)

including flow manager

for flush plates 156x197 mm revision shaft 66 791 needs to be ordered

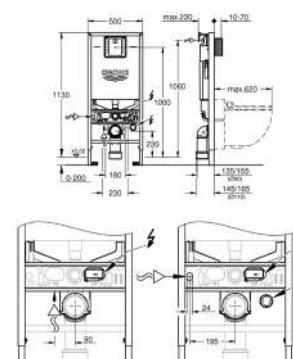

GROHE SENSIA PRO


Ref. no.

Colour



101458 SH0 0
**GROHE Sensia
Remote control**
for Sensia shower toilet system
including wall holder
professional edition


alpine white



46 944 001

Installation kit for automatic flush and pre-flush
for Rapid SL and Rapid SLX with flushing cistern GD2 in combination with
GROHE shower toilet
servo motor for GD 2
actuation rod for flushing valve
cable and blind cap
flexible hose
WC actuation plate not included
CE approved

GROHE SENSIA ARENA



Ref. no.

Colour

39 354 SH1

alpine white

GROHE Sensia Arena

Smart Toilet for concealed flushing cisterns, wall-hung

GROHE Hygiene Clean: with antibacterial glazing HyperClean (SIAA Kokin

Japanese standard compliant) and non-stick coating AquaCeramic

GROHE Power Flush: rimless wash down with GROHE Triple Vortex flushing

GROHE Skin Clean:

2 adjustable spray arms (1 for standard spray, 1 for lady spray)

separate water way for lady spray

oscillating spray (automatic forward and reverse motion of the spray)

pulsating spray for massage

adjustable spray intensity

automatic pre- and post-rinsing of spray nozzle with fresh water

integrated instant heater provides unlimited warm water

adjustable temperature

warm air dryer with adjustable temperature

PlasmaCluster function - ion technology

descaling function

Duroplast WVC seat and lid with automatic opening/close function

infra-red user detection

inside bowl night light

hidden water supply and power supply connections

smart phone app for iOS and Android

manual remote controller with wall-mounted holder

active carbon filter for odour absorption

water supply connection set for concealed cistern

nominal voltage 220-240 V AC, main frequency 50-60 Hz

type of protection IPX4, complies with EN 1717, CE approved

recommended in combination with a GROHE Rapid SLX element (1,13 m

installation height)

39 596 000

Rapid SLX

Element for WC, 1.13 m installation height with integrated socket and shower toilet connection

flushing cistern GDX, 6 l

small revision shaft for small flush plates

for on-the-wall installations or studded walls

powder coated steel frame, self-supporting

for dry-cladding, completely pre-assembled

TÜV approved

2 WC fixing bolts

distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GDX, 6 l, containing following features:

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

water supply from right, back or top

low noise (group I acc. to German Noise Specification)

fully insulated against condensation

1/2" water supply connection including integrated angle valve and push fit

flexible hose union

no tools required for installation of inspection shaft, for vertical use


including flow manager

prevents overspill in rimless toilets

easy flow regulation via inspection shaft without removing the valves

for on-the-wall installation 38 558 00M needs to be ordered separately


for flush plates 156x197 mm revision shaft 66 791 needs to be ordered

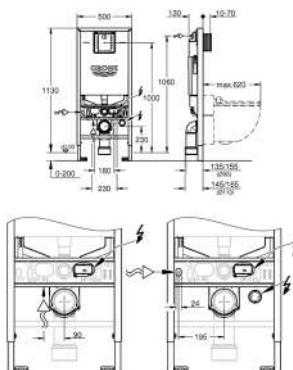

GROHE SENSIA ARENA

Ref. no.

Colour

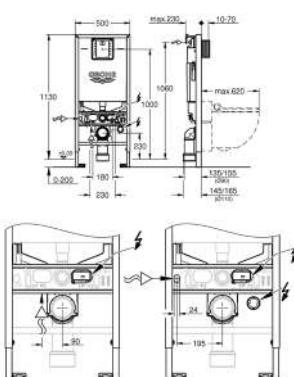

39 598 000

Rapid SI X


Rapid SET
3-in-1 set for WC, 1.13 m installation height

flushing cistern GDX, 6 l

Rapid SLX element for WC (3)

wall brackets (38 558)

noise protection (37 131 000)
including flame arrestor



46 944 001

Installation kit for automatic flush and pre-flush

for Rapid SL and Rapid SLX with flushing cistern GD2 in combination with

GROHE shower toilet


servo motor for GD 2

actuation rod for the cable and blind assembly.

cable and blind
flexible hose

WC actuation plate not included

CE approved



14 926 002

GROHE Sensia Arena

Remote control

including wall hold

SMART TOILET

**GROHE
CERAMICS**











CONTENTS

| | |
|----------------------|-----|
| Essence | 424 |
| Cube Ceramic | 427 |
| Euro Ceramic | 430 |
| BauEdge Ceramic | 434 |
| Bau Ceramic | 435 |
| Acrylic shower trays | 441 |

GROHE ESSENCE



Ref. no.

Colour

39 564 00H alpine white

Essence

Wash basin 70

wall hung

1 hole punched, 2 holes pre-punched with overflow on opposite site to faucet

700 x 485 mm

suitable for half and full pedestal

sanitary ware

GROHE PureGuard anti-scale coating and anti-bacterial glazing

39 565 00H alpine white

Essence

Wash basin 60

wall hung

1 hole punched, 2 holes pre-punched with overflow on opposite site to faucet

600 x 485 mm

suitable for half and full pedestal

sanitary ware

GROHE PureGuard anti-scale coating and anti-bacterial glazing

39 566 00H alpine white

Essence

Vanity basin 100

wall hung

1 hole punched, 2 holes pre-punched with overflow on opposite site to faucet

suitable for vanity units

1000 x 460 mm

sanitary ware

GROHE PureGuard anti-scale coating and anti-bacterial glazing wash basin underside: grinded

39 567 00H alpine white

Essence

Vanity basin 80

wall hung

1 hole punched, 2 holes pre-punched with overflow on opposite site to faucet

800 x 460 mm

sanitary ware

GROHE PureGuard anti-scale coating and anti-bacterial glazing wash basin underside: grinded

39 568 00H alpine white

Essence

Vanity basin 60

wall hung

1 hole punched, 2 holes pre-punched with overflow on opposite site to faucet

suitable for vanity units

600 x 460 mm

sanitary ware

GROHE PureGuard anti-scale coating and anti-bacterial glazing

39 608 00H alpine white

Essence

Vessel basin 60

without overflow

600 x 400 mm

including fixation set

including ceramic waste, removable cover


non-closable

sanitary ware


GROHE PureGuard anti-scale coating and anti-bacterial glazing

GROHE ESSENCE


Ref. no. Colour




39 609 00H alpine white
Essence
Vessel basin 45
without overflow
450 x 450 mm
including fixation set
including ceramic waste, removable cover
non-closable
sanitary ware
GROHE PureGuard anti-scale coating and anti-bacterial glazing




39 570 000 alpine white
Essence
Half pedestal
including fixation set
sanitary ware



39 571 00H alpine white
Essence
Wall hung WC
for concealed cistern
wash down
rimless
horizontal outlet
flush volume 3/4.5 l
including fixation set
sanitary ware
fully skirted with invisible fixation
GROHE PureGuard anti-scale coating and anti-bacterial glazing
compatible with seat and cover 39 577 001 (soft close)



39 573 00H alpine white
Essence
Floor standing back to wall WC
universal trap for horizontal and vertical outlet
back to wall
for concealed cistern
rimless
flush volume 3/4.5 l
including fixation set
sanitary ware
fully skirted with invisible fixation
GROHE PureGuard anti-scale coating and anti-bacterial glazing
compatible with seat and cover 39 577 001 (soft close)




39 572 00H alpine white
Essence
Floor standing WC for close coupled combination
close coupled
universal trap for horizontal and vertical outlet
wash down
rimless
flush volume 3/4.5 l
including fixation set
cistern to be ordered separately
sanitary ware
fully skirted with invisible fixation
GROHE PureGuard anti-scale coating and anti-bacterial glazing
compatible with seat and cover 39 577 001 (soft close)

GROHE ESSENCE

Ref. no.


Colour



39 579 000

alpine white


Essence
Exposed flushing cistern for close coupled combination
bottom inlet
inlet and outlet concealed
including flushing set GROHE AV1
dual flush 4.5/3 l
including fixation set
sanitary ware



39 577 001

alpine white


Essence
WC seat soft close
with lid
quick release function
detachable
material: Duroplast
including fixation set
stainless steel hinges
compatible with all Essence bowls



39 574 00H

alpine white

Essence
Wall hung bidet
1 hole punched
with overflow
including fixation set
sanitary ware
fully skirted with invisible fixation
GROHE PureGuard anti-scale coating and anti-bacterial glazing




39 575 00H

alpine white


Essence
Floor standing bidet
1 hole punched
with overflow
including fixation set
sanitary ware
fully skirted with invisible fixation
GROHE PureGuard anti-scale coating and anti-bacterial glazing

GROHE CUBE CERAMIC




Ref. no. Colour


| | |
|---|--------------|
| 39 386 00H | alpine white |
| Cube Ceramic Wash basin 100 wall hung 1 hole punched, 2 holes pre-punched with overflow 1000 x 490 mm sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |




| | |
|---|--------------|
| 39 469 00H | alpine white |
| Cube Ceramic Wash basin 80 wall hung 1 hole punched, 2 holes pre-punched with overflow 800 x 490 mm sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |




| | |
|---|--------------|
| 39 473 00H | alpine white |
| Cube Ceramic Wash basin 60 wall hung 1 hole punched, 2 holes pre-punched with overflow 600 x 490 mm sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |



| | |
|---|--------------|
| 39 474 00H | alpine white |
| Cube Ceramic Wash basin 50 wall hung 1 hole punched, 2 holes pre-punched with overflow 500 x 490 mm sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |








| | |
|--|--------------|
| 39 475 00H | alpine white |
| Cube Ceramic Counter top basin 100 flat back side glazed 1 hole punched, 2 holes pre-punched with overflow 1000 x 490 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |




| | |
|--|--------------|
| 39 476 00H | alpine white |
| Cube Ceramic Counter top basin 80 flat back side glazed 1 hole punched, 2 holes pre-punched with overflow 800 x 490 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |

GROHE CUBE CERAMIC


| | Ref. no. | Colour |
|---|--|--------------|
|  | 39 477 00H | alpine white |
|  | Cube Ceramic Counter top basin 60 flat back side glazed 1 hole punched, 2 holes pre-punched with overflow 600 x 490 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |
|  | 39 478 00H | alpine white |
|  | Cube Ceramic Counter top basin 50 flat back side glazed 1 hole punched, 2 holes pre-punched with overflow 500 x 490 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |
|  | 39 481 00H | alpine white |
|  | Cube Ceramic Vessel basin 50 without overflow 500 x 470 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |
|  | 39 482 00H | alpine white |
|  | Cube Ceramic Vessel basin 40 without overflow 410 x 410 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |
|  | 39 480 00H | alpine white |
|  | Cube Ceramic Under-counter wash basin 50 installation from below with overflow 492 x 370 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |
|  | 39 479 00H | alpine white |
|  | Cube Ceramic Counter basin 60 flat back side glazed built-in 1 hole punched, 2 holes pre-punched with overflow 600 x 490 mm including fixation set sanitary ware GROHE PureGuard anti-scale coating and anti-bacterial glazing | |

GROHE CUBE CERAMIC


Ref. no. Colour



39 483 00H alpine white
Cube Ceramic
Hand rinse basin 45
 wall hung
 1 hole punched
 with overflow
 455 x 350 mm
 sanitary ware
GROHE PureGuard anti-scale coating and anti-bacterial glazing



39 245 00H alpine white
Cube Ceramic
Wall hung WC
 for concealed cistern
 horizontal outlet
 wash down
 rimless
 flush volume 3/4.5 l
 including fixation set
 sanitary ware
 fully skirted with invisible fixation
GROHE PureGuard anti-scale coating and anti-bacterial glazing
 compatible with seat and cover 39 488 000 (soft close)



39 488 000 alpine white
Cube Ceramic
WC seat soft close
 with lid
 quick release function
 detachable
 material: Duroplast
 including fixation set
 stainless steel hinges
 easy fixation from above
 weight bearing capacity 150 kg
 compatible with all Cube Ceramic bowls


GROHE EURO CERAMIC

| | Ref. no. | Colour |
|---|--|--------------|
|  | 39 323 000 Euro Ceramic Wash basin 65 wall hung 1 hole punched with overflow 650 x 514 mm sanitary ware | alpine white |
|  | 39 335 000 Euro Ceramic Wash basin 60 wall hung 1 hole punched with overflow 595 x 482 mm sanitary ware | alpine white |
|  | 39 337 000 Euro Ceramic Counter top basin 60 1 hole punched with overflow 596 x 483 mm sanitary ware | alpine white |
|  | 39 336 000 Euro Ceramic Wash basin 55 wall hung 1 hole punched with overflow 550 x 450 mm sanitary ware | alpine white |
|  | 39 423 000 Bau Ceramic Undercounter wash basin 55 installation from below with overflow 560 x 420 mm sanitary ware 21 pieces per pallet | alpine white |
|  | 39 327 000 Euro Ceramic Mini hand rinse basin wall hung 1 hole punched 370 x 180 mm sanitary ware no pedestals recommended | alpine white |

GROHE EURO CERAMIC


Ref. no.

Colour




39 201 000 alpine white

Euro Ceramic
Semi pedestal for wash basin
invisible fixation set
sanitary ware
suitable for all GROHE wash basins except
39 324 000 and 39 327 000




39 202 000 alpine white

Euro Ceramic
Full pedestal for wash basin
invisible fixation set
sanitary ware
suitable for all GROHE wash basins except
39 324 000 and 39 327 000




39 554 000 alpine white

Euro Ceramic
Wall hung WC set
Euro Ceramic wall hung WC with Triple Vortex (39 328 000)
for concealed cistern
horizontal outlet
wash down
rimless
flush volume 3/5 l
sanitary ware
fully skirted with invisible fixation
Euro Ceramic WC seat with lid
soft close
quick release function
detachable
material: Duroplast
including fixation set



39 462 000 alpine white

Euro Ceramic
Bundle close coupled WC
consisting of:
Euro Ceramic WC (39 338 000)
horizontal outlet
flush volume 3/5 l
Euro Ceramic cistern (39 332 000)
bottom inlet
Euro Ceramic WC seat with lid
4 pieces per pallet




39 328 000 alpine white

Euro Ceramic
Wall hung WC
for concealed cistern
horizontal outlet
GROHE Triple Vortex flushing technology
wash down
rimless
flush volume 3/5 l
including fixation set
sanitary ware
fully skirted with invisible fixation
compatible with seat and cover 39 330 002 (soft close) and 39 331 002 (without soft close)

GROHE EURO CERAMIC


Ref. no.

Colour




39 328 10H alpine white

Euro Ceramic
Wall hung WC with Pure Guard
for concealed cistern
horizontal outlet
GROHE Triple Vortex flushing technology
wash down
rimless
flush volume 3/5 l
including fixation set
sanitary ware
fully skirted with invisible fixation
GROHE PureGuard anti-scale coating and anti-bacterial glazing
compatible with seat and cover 39 330 002 (soft close) and
39 331 002 (without soft close)




39 206 000 alpine white

Euro Ceramic
Wall hung compact WC
for concealed cistern
horizontal outlet
GROHE Triple Vortex flushing technology
wash down
rimless
flush volume 3/5 l
49 cm width
including fixation set
sanitary ware
fully skirted with invisible fixation
compatible with seat and cover 39 330 002 (soft close) and 39 331 002 (without soft close)




39 538 000 alpine white

Euro Ceramic
Wall hung WC, basic
for concealed cistern
horizontal outlet
wash down
rimless
flush volume 3/5 l
sanitary ware
compatible with seat and cover 39 330 002 (soft close) and 39 331 002 (without soft close)



39 339 000 alpine white

Euro Ceramic
Floor standing back to wall WC
horizontal outlet
back to wall
GROHE Triple Vortex flushing technology
wash down
rimless
flush volume 3/5 l
including fixation set
sanitary ware
fully skirted with invisible fixation
compatible with seat and cover 39 330 002 (soft close) and 39 331 002 (without soft close)





39 330 002 alpine white

Euro Ceramic
WC seat soft close
with lid
quick release function
detachable
material: Duroplast
including fixation set
stainless steel hinges
compatible with all Euro Ceramic bowls

GROHE EURO CERAMIC

Ref. no.


Colour



39 331 002

alpine white


**Euro Ceramic
WC seat**
with lid
quick release function
detachable
material: Duroplast
including fixation set
stainless steel hinges
suitable for all GROHE Euro Ceramic WCs



39 208 000

alpine white

**Euro Ceramic
Wall hung bidet**
1 hole punched
with overflow
including fixation set
sanitary ware
fully skirted with invisible fixation
16 pieces per pallet




39 340 000

alpine white

**Euro Ceramic
Floor standing bidet**
1 hole punched
with overflow
including fixation set
sanitary ware
fully skirted with invisible fixation

GROHE BAUEDGE CERAMIC




Ref. no.

Colour


39 808 000 alpine white

BauEdge Ceramic Wash basin 60
wall hung
1 hole punched
with overflow
600 x 448 mm
sanitary ware
suitable for half pedestal 39 426 000 and full pedestal 39 425 000
12 pieces per pallet




39 807 000 alpine white

BauEdge Ceramic Wash basin 55
wall hung
1 hole punched
with overflow
550 x 400 mm
sanitary ware
suitable for half pedestal 39 426 000 and full pedestal 39 425 000
35 pieces per pallet




39 806 000 alpine white

BauEdge Ceramic Hand rinse basin 45
wall hung
1 hole punched
with overflow
450 x 350 mm
sanitary ware
27 pieces per pallet




39 809 000 alpine white

BauEdge Ceramic Wall hung WC
for concealed cistern
wash down
rimless
horizontal outlet
flush volume 3/5 l
sanitary ware
compatible with seat and cover 39 813 000
16 pieces per pallet



39 810 000 alpine white

BauEdge Ceramic Floor standing WC
back to wall
for concealed cistern
wash down
rimless
horizontal outlet
flush volume 3/5 l
including fixation set
sanitary ware
compatible with seat and cover 39 813 000
18 pieces per pallet




39 813 000 alpine white


BauEdge Ceramic WC seat soft close
with lid
quick release function
detachable
material: Duroplast
including fixation set
stainless steel hinges
compatible with all BauEdge ceramic bowls
168 pieces per pallet

GROHE BAU CERAMIC


Ref. no. Colour




39 420 000 alpine white
Bau Ceramic
Wash basin 65
wall hung
1 hole punched
with overflow
646 x 468 mm
sanitary ware




39 421 000 alpine white
Bau Ceramic
Wash basin 60
wall hung
1 hole punched
with overflow
609 x 442 mm
sanitary ware
12 pieces per pallet




39 440 000 alpine white
Bau Ceramic
Wash basin 55
wall hung
1 hole punched
with overflow
553 x 386 mm
sanitary ware



39 423 000 alpine white
Bau Ceramic
Undercounter wash basin 55
installation from below
with overflow
560 x 420 mm
sanitary ware
21 pieces per pallet



39 426 000 alpine white
Bau Ceramic
Half pedestal
including fixation set
sanitary ware
suitable for all Bau and BauEdge Ceramic wash basins except
39 424 000 and 39 806 000



39 425 000 alpine white
Bau Ceramic
Full pedestal
including fixation set
sanitary ware
suitable for all Bau and BauEdge Ceramic wash basins except
39 424 000 and 39 806 000

GROHE BAU CERAMIC

| | Ref. no. | Colour |
|---|--|--------------|
|  | 39 910 000 Bau Ceramic Floor standing WC for close coupled combination wash down rimless universal outlet flush volume 3/6 l including fixation set cistern to be ordered separately sanitary ware fully skirted with visible fixation compatible with seat and cover 39 913 (soft close) compatible with Bau Ceramic cisterns 39 911 000 and 39 912 000 professional edition 9 pieces per pallet | alpine white |
|  | 39 912 000 Bau Ceramic Exposed flushing cistern bottom inlet inlet and outlet concealed including flushing set sanitary ware compatible with Bau Ceramic bowl 39 910 000 professional edition 24 pieces on a pallet | alpine white |
|  | 39 913 000 Bau Ceramic WC seat soft close slim with lid slim design quick release function detachable material: Duroplast including fixation set stainless steel hinges easy fixation from above weight bearing capacity 150 kg compatible with Bau Ceramic bowl 39 910 000 professional edition 72 pieces per pallet | alpine white |
|  | 39 427 000 Bau Ceramic Wall hung WC for concealed cistern wash down rimless horizontal outlet flush volume 6/3 l sanitary ware compatible with seat and cover 39 492 000 (standard), 39 493 000 (soft close) and 39 898 000 (slim seat soft close) 16 pieces per pallet | alpine white |
|  | 39 491 000 Bau Ceramic Wall hung WC for concealed cistern wash down open rim horizontal outlet flush volume 6/3 l sanitary ware compatible with seat and cover 39 492 000 (standard) or 39 493 000 (soft close) 16 pieces per pallet | alpine white |

GROHE BAU CERAMIC

| | Ref. no. | Colour |
|---|--|--------------|
|  | 39 428 000 Bau Ceramic Floor standing WC for close coupled combination wash down boxed rim horizontal outlet flush volume 6/3 l including fixation set cistern to be ordered separately sanitary ware compatible with seat and cover 39 492 000 (standard) or 39 493 000 (soft close) | alpine white |
|  | 39 349 000 Bau Ceramic Floor standing WC for close coupled combination wash down rimless horizontal outlet flush volume 6/3 l including fixation set cistern to be ordered separately sanitary ware compatible with seat and cover 39 492 000 (standard), 39 493 000 (soft close) and 39 923 000 (slim seat soft close) | alpine white |
|  | 39 429 000 Bau Ceramic Floor standing WC for close coupled combination wash down rimless vertical outlet, concealed flush volume 6/3 l including fixation set cistern to be ordered separately sanitary ware compatible with seat and cover 39 492 000 (standard), 39 493 000 (soft close) and 39 923 000 (slim seat soft close) | alpine white |
|  | 39 436 000 Bau Ceramic Exposed flushing cistern bottom inlet inlet and outlet concealed including flushing set sanitary ware | alpine white |
|  | 39 437 000 Bau Ceramic Exposed flushing cistern side inlet including flushing set sanitary ware | alpine white |
|  | 39 492 000 Bau Ceramic WC seat with lid quick release function detachable material: Duroplast including fixation set stainless steel hinges compatible with all Bau Ceramic bowls except 39 910 000 168 pieces per pallet | alpine white |


GROHE BAU CERAMIC

| | Ref. no. | Colour |
|---|--|--------------|
|  | 39 493 000 Bau Ceramic WC seat soft close with lid quick release function detachable material: Duroplast including fixation set stainless steel hinges compatible with all Bau Ceramic bowls except 39 910 000 168 pieces per pallet | alpine white |
|  | 39 433 000 Bau Ceramic Wall hung bidet 1 hole punched with overflow sanitary ware 16 pieces per pallet | alpine white |
|  | 39 432 000 Bau Ceramic Floor standing bidet 1 hole punched with overflow including fixation set sanitary ware | alpine white |
|  | 39 438 000 Bau Ceramic Urinal concealed inlet flush volume 1 l including fixation set sanitary ware for installation please order urinal trap 39 732 000 (horizontal outlet) or 39 733 000 (vertical outlet), sold separately 16 pieces per pallet | alpine white |
|  | 39 439 000 Bau Ceramic Urinal top inlet flush volume 1 l including fixation set sanitary ware for installation please order urinal trap 39 732 000 (horizontal outlet) or 39 733 000 (vertical outlet), sold separately 16 pieces per pallet | alpine white |

GROHE BAU CERAMIC

Ref. no.

Colour



39 351 000 alpine white

Bau Ceramic

Wall hung WC set

consisting of:

Bau Ceramic wall hung WC (39 427 000)

for concealed cistern

horizontal outlet

wash down

rimless

flush volume 3/6 l

sanitary ware

Bau Ceramic WC seat (39 493 000)


soft close

quick release function

detachable

material: Duroplast

including fixation set



103849 SH0 0 alpine white

Rapid SL

5-in-1 set for WC, 1.13 m installation height

with flushing cistern GD 2, factory settings 3 & 6 l

consisting of:

Rapid SL element for WC (38 528 001)

Bau Ceramic wall hung WC including seat and lid, soft close (103 860 SH00)

Arena Cosmopolitan flush plate, chrome, vertical installation (38 844 000)

wall brackets (38 558 00M)

noise protection (37 131 000)



103860 SH0 0 alpine white

Bau Ceramic

Wall hung WC set

consisting of:

Bau Ceramic wall hung WC

for concealed cistern

horizontal outlet

wash down

rimless

flush volume 3/5 l

sanitary ware

Bau Ceramic WC seat with lid


soft close

quick release function

detachable

material: Duroplast

including fixation set



39 347 000 alpine white

Bau Ceramic


Bundle close coupled WC

Bau Ceramic floor standing toilet with horizontal outlet (39 428 000)

Bau Ceramic exposed flushing cistern (39 437 000)

Bau Ceramic WC seat (39 493 000)

GROHE BAU CERAMIC




Ref. no.

Colour


39 346 000 alpine white
Bau Ceramic
Bundle close coupled WC
Bau Ceramic floor standing toilet with vertical outlet (39 429 000)
Bau Ceramic exposed flushing cistern (39 437 000)
Bau Ceramic WC seat (39 493 000)

GROHE ACRYLIC SHOWER TRAYS


Ref. no. Colour




39 300 000 alpine white
Acrylic shower tray 1000 x 1000
dimensions: 1000 x 1000 mm
depth: 30 mm
material: acrylic
diameter of waste outlet: 90 mm
recommended GROHE waste sets: 49 533 000 (vertical) and 49 534 000 (horizontal), sold separately




39 301 000 alpine white
Acrylic shower tray 900 x 900
dimensions: 900 x 900 mm
depth: 30 mm
material: acrylic
diameter of waste outlet: 90 mm
recommended GROHE waste sets: 49 533 000 (vertical) and 49 534 000 (horizontal), sold separately




39 302 000 alpine white
Acrylic shower tray 800 x 800
dimensions: 800 x 800 mm
depth: 30 mm
material: acrylic
diameter of waste outlet: 90 mm
recommended GROHE waste sets: 49 533 000 (vertical) and 49 534 000 (horizontal), sold separately



39 306 000 alpine white
Acrylic shower tray 800 x 1000
dimensions: 800 x 1000 mm
depth: 30 mm
material: acrylic
diameter of waste outlet: 90 mm
recommended GROHE waste sets: 49 533 000 (vertical) and 49 534 000 (horizontal), sold separately




49 533 000 chrome
49 533 SH0 alpine white
Waste set for universal shower tray
Ø 112 mm
vertical outlet
GROHE Long-Life finish
flow rate 1.1 l/s according to DIN EN 274



49 534 000 chrome
49 534 SH0 alpine white
Waste set for universal shower tray
Ø 112 mm
horizontal outlet
GROHE Long-Life finish
flow rate 0.7 l/s (42 l/min) according to DIN EN 274

GROHE INSTALLATION SYSTEMS



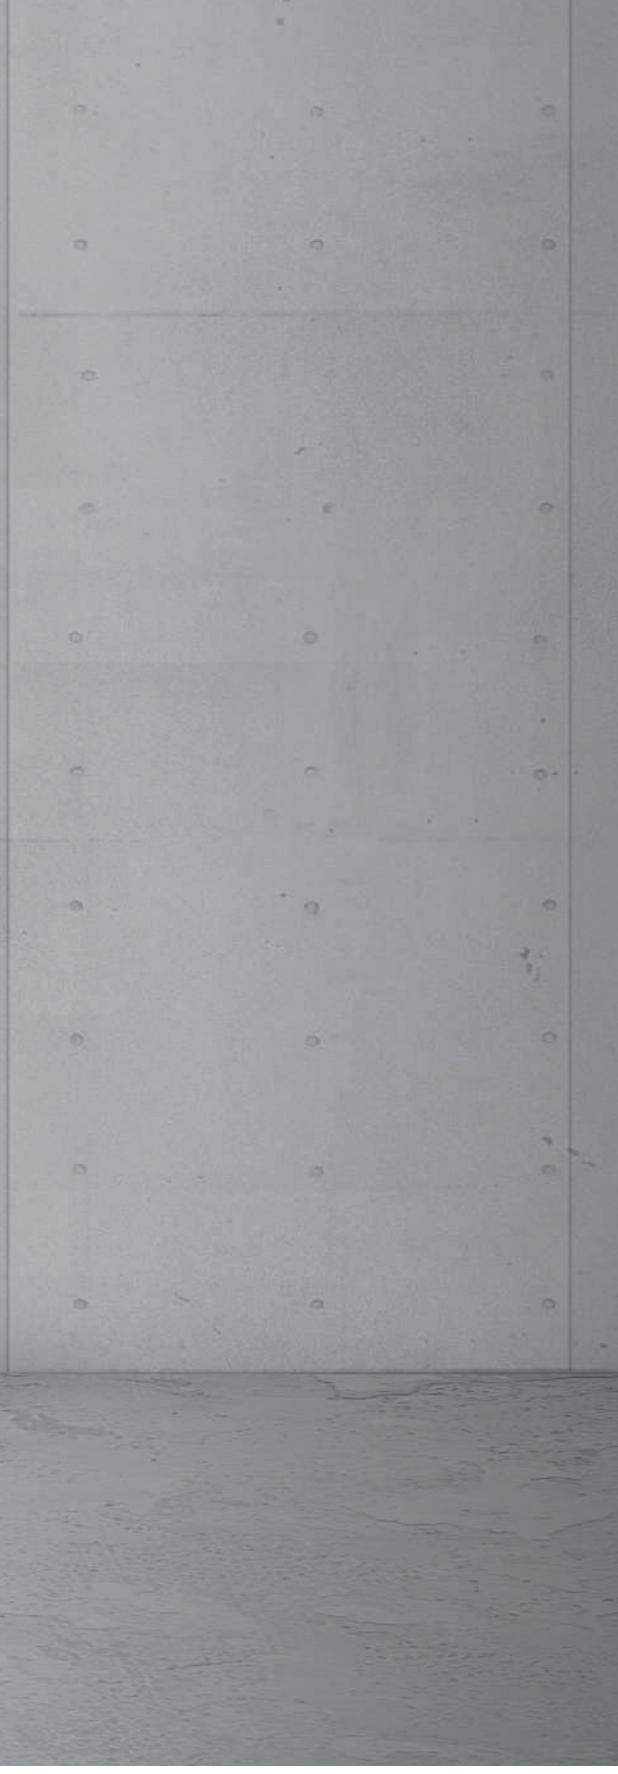


CONTENTS

| | | |
|-----------|-----------------------------------|-----|
| Rapid SLX | Rapid SLX | 444 |
| Rapid SL | Rapid SL for WC | 445 |
| | Rapid SL for urinal | 450 |
| | Rapid SL for wash basin and bidet | 451 |
| | Rapid SL for support rails | 453 |
| | Rapid SL accessories | 454 |
| Uniset | Rapido Shower Frame | 455 |
| | Uniset frames and accessories | 456 |

GROHE RAPID SLX

Ref. no.

Colour

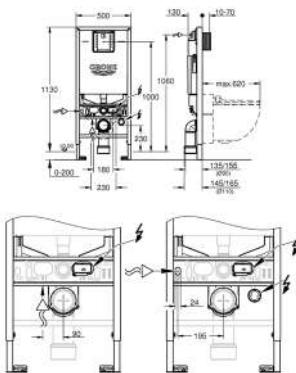

39 596 000

Rapid SLX

Element for WC, 1.13 m installation height with integrated socket and shower toilet connection

flushing cistern GDX, 6 l

small revision shaft for small flush plates
for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled

TÜV approved

2 WC fixing bolts

distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GDX, 6 l, containing following features:

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop
or single flush

water supply from right, back or top

low noise (group I acc. to German Noise Specification)

fully insulated against condensation

1/2" water supply connection including integrated angle valve and push fit

flexible hose union


no tools required for installation of inspection shaft, for vertical use

including flow manager

prevents overspill in rimless toilets

easy flow regulation via inspection shaft without removing the valves
for on-the-wall installation 38 558 00M needs to be ordered separately

for flush plates 156x197 mm revision shaft 66 791 needs to be ordered

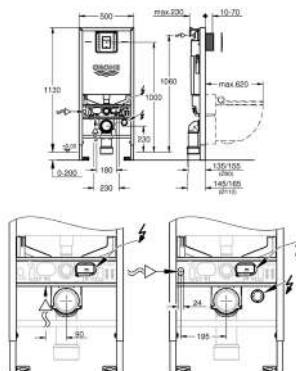

39 603 000

chrome


Rapid SLX

3-in-1 set for WC, 1.13 m installation height

flushing cistern GDX, 6 l

Rapid SLX element for WC (39 596 000) with integrated power socket
Skate Cosmopolitan S flush plate, chrome (37 535 000)
wall brackets (38 558 00M)

including flow manager

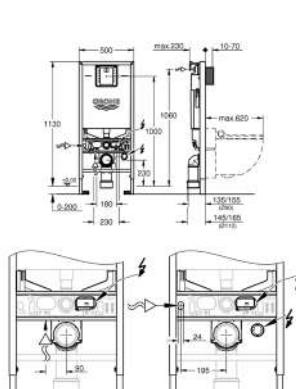

39 598 000

Rapid SLX

3-in-1 set for WC, 1.13 m installation height

flushing cistern GDX, 6 l

Rapid SLX element for WC (39 596 000) with integrated power socket
wall brackets (38 558 00M)


noise protection (37 131 000)

including flow manager

for flush plates 156x197 mm revision shaft 66 791 needs to be ordered

GROHE RAPID SL FOR WC

Ref. no. Colour



38 528 001

chrome

Rapid SL

Element for WC, 1.13 m installation height
for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

TÜV approved

2 WC fixing bolts, WC ceramics with small bearing area (< 205 mm)
require 38 779 000

distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GD 2, containing following features:

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop
or single flush

water supply from left/right or back

low noise (group I acc. to German Noise Specification)

insulated against condensation


1/2" water supply connection including integrated angle valve and push fit
flexible hose union

no tools required for installation of inspection shaft

for vertical or horizontal use

for on-the-wall installation 38 558 00M needs to be ordered separately

for mounting of small flush plates revision shaft 40 911 000 needs to be ordered
separately



38 763 001


chrome

Rapid SL

2-in-1 set for WC, 1.13 m installation height
with flushing cistern GD 2

Rapid SL element for WC (38 528 001)

Skate Air flush plate, chrome, vertical installation (38 505 000)



38 860 000

chrome

Rapid SL

3-in-1 set for WC, 1.13 m installation height

with flushing cistern GD 2


Rapid SL element for WC (38 528 001)

Nova Cosmopolitan flush plate, chrome (38 765 000)


wall brackets (38 558 00M)

GROHE RAPID SL FOR WC


Ref. no. Colour




39 501 000 chrome
Rapid SL
3-in-1 set for WC, 1.13 m installation height
with flushing cistern GD 2
Rapid SL element for WC (38 528 001)
Skate Cosmopolitan S flush plate, chrome (37 535 000)
wall brackets (38 558 00M)
including revision shaft 40 911 000 for mounting of small flush plates



39 939 000 phantom black
Rapid SL
3-in-1 set for WC, 1.13 m installation height
flushing cistern GD 2, 4.5 - 9 l
consisting of:
Rapid SL element for WC (38 528 001)
Skate Cosmopolitan flush plate, phantom black (38 732 KF0)
wall brackets (38 558 00M)




38 721 001 chrome
Rapid SL
3-in-1 set for WC, 1.13 m installation height
with flushing cistern GD 2
Rapid SL element for WC (38 528 001)
Skate Air flush plate, chrome, vertical installation (38 505 000)
wall brackets (38 558 00M)



38 772 001 chrome
Rapid SL
3-in-1 set for WC, 1.13 m installation height
with flushing cistern GD 2
Rapid SL element for WC (38 528 001)
Skate Cosmopolitan flush plate, chrome (38 732 000)
wall brackets (38 558 00M)

GROHE RAPID SL FOR WC

Ref. no. Colour



38 536 001

Rapid SL


2-in-1 set for WC, 1.13 m installation height

consisting of:

Rapid SL element for WC (38 528 001)

wall brackets (38 558 00M)

for use with Rapid SL and Uniset with GD 2 cistern please order shaft 40 911 000



39 687 000

Rapid SL Slim

Element for WC with flushing cistern 88.9 mm, 1.13 m installation height

for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

2 WC fixing bolts, distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern SLIM, 3 - 6 l, containing following features:

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

water supply from top

insulated against condensation


1/2" water supply connection including integrated angle valve and push fit

flexible hose union

Shortable inspection shaft incl. protection during construction phase, for vertical use

for on-the-wall installation wall brackets 39 699 000 need to be ordered separately

for mounting of small flush plates revision shaft 40 949 000 to be ordered separately



38 994 000

Rapid SL

Element for WC with flushing cistern 80 mm, 1.13 m installation height

element width 0.62 m

for small, narrow bathrooms

for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

quick adjustment, lockable

fixing material

TÜV approved

2 WC fixing bolts, fixing device for ceramic

distance of fixing bolts 180/230 mm

PP outlet bend Ø 90 mm

depth adjustable

PP reducer Ø 90/110 mm

inlet and outlet connecting set

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

water supply from top or back

low noise (group I acc. to German Noise Specification)

insulated against condensation

water supply 1/2" and push fit flexible hose union


no tools required for installation of inspection shaft

for vertical use

including wall brackets 38 558 00M for on-the-wall installation

for mounting of small flush plates revision shaft 40 949 000 to be ordered separately

GROHE RAPID SL FOR WC



Ref. no. Colour

38 525 001

Rapid SL

Element for WC, 1.00 m installation height
for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

TÜV approved

2 WC fixing bolts, WC ceramics with small bearing area (< 205 mm) require 38 779 000

distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern containing the following features:

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

front or top actuation

water supply from left/right or back

low noise (group I acc. to German Noise Specification)

insulated against condensation


1/2" water supply connection including integrated angle valve and push fit

flexible hose union

Shortable inspection shaft incl. protection during construction phase

for on-the-wall installation 38 558 00M needs to be ordered separately

for mounting of small flush plates please order revision shaft 40 950 000 (sold separately)



38 526 000

Rapid SL

Element for WC, 0.82 m installation height
for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

TÜV approved

2 WC fixing bolts, distance of fixing bolts 180/230 mm

PP outlet bend Ø 90 mm

depth adjustable

reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern containing the following features:

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

front or top actuation

water supply from left/right or back

low noise (group I acc. to German Noise Specification)

insulated against condensation


1/2" water supply connection including integrated angle valve and push fit

flexible hose union

Shortable inspection shaft incl. protection during construction phase

for on-the-wall installation 38 558 00M needs to be ordered separately

for mounting of small flush plates please order revision shaft 40 950 000 (sold separately)



38 519 001 chrome

Rapid SL

Element for WC with flush valve, 1.13 m installation height
with flush valve 6 - 9 l

for manual/electronic actuation

for on-the-wall installations or studded walls
steel frame with foil coating/hot galvanized, self-supporting
for dry-cladding, completely pre-assembled

TÜV approved

2 WC fixing bolts, distance of fixing bolts 180/230 mm

WC ceramics with small bearing area (< 205 mm) require 38 779 000

PP outlet bend Ø 90 mm

depth adjustable

PP reducer Ø 90/110 mm

inlet and outlet connecting set

manual/electronic actuation

low noise (group I acc. to German Noise Specification)

stop valve

6 - 9 l adjustable

flush bend

flow rate adjustment

for on-the-wall installation 38 558 00M needs to be ordered separately

GROHE RAPID SL FOR WC


Ref. no.

Colour



39 699 000

Wall brackets for slim cistern
for use with 88.9 mm cistern




42 333 000

chrome

4.5 l adapter for GD2

to reduce the maximum flush volume to 3.8 l - 6.0 l (big flush) and 1.8 l - 5.0 l (small flush)



42 327 000

chrome


PP-outlet bend Ø 90 mm

variable depth adjustment
including lip seal DN 90

GROHE RAPID SL FOR URINAL

Ref. no.

Colour



38 786 001

Rapid SL

Element for urinal with GROHE Rapido U

1.13 and 1.30 m installation height

for manual actuation or Tectron infra-red electronic 6 V or 230 V

for on-the-wall installations or studded walls

powder coated steel frame, self-supporting

for dry-cladding, completely pre-assembled

height adjustable fitting connections

TÜV approved

HT-outlet bend Ø 50 mm

fixing bolts M8, with fixing device for the ceramic

inlet connection and inlet connecting set

stop valve

flow pressure min 0.5 bar

operating pressure max 10 bar

flush aid

functional unit checked ex factory

water supply connections 1/2" outer thread


connecting box for mains supply 230 V

installation box with gasket

shortable inspection shaft incl. protection during construction phase for sets for

final installation with dimensions 116 x 144 mm

for on-the-wall installation 38 558 00M needs to be ordered separately



39 376 000

Rapid SL

Element for urinal with temperature sensor

with roughing-in set for T sensor

1.13 and 1.30 m installation height

for on-the-wall installations or studded walls

powder coated steel frame, self-supporting

for dry-cladding, completely pre-assembled

height adjustable fitting connections

TÜV approved

HT-outlet bend Ø 50 mm

fixing bolts M8, with fixing device for the ceramic

inlet connection and inlet connecting set

box for concealed installation including roughing-in box

stop valve and flush elbow

for T sensor electronic installation set 39 368 or 39 369 needs to be ordered

separately

for on-the-wall installation 38 558 00M needs to be ordered separately

GROHE RAPID SL FOR WASH BASIN AND BIDET

Ref. no.

Colour



38 554 001

Rapid SL

Element for wash basin, single hole installation with noise protection

1.13 m installation height

for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

TÜV approved

wash basin fixing bolts M10 with fixing device for ceramic
variable distance of fixing bolts

HT-outlet bend Ø 50 mm

seal Ø 32 mm

2 noise protected fitting connections 1/2"

for on-the-wall installation 38 558 00M needs to be ordered separately



39 052 000

Rapid SL

Element for wash basin, single hole installation, height adjustable with noise protection

1.13 m installation height

for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

TÜV approved

fixing and connecting traverse, height adjustable
wash basin fixing bolts M10 with fixing device for ceramic
variable distance of fixing bolts

HT-outlet bend Ø 50 mm

seal Ø 32 mm

2 noise protected fitting connections 1/2"

for on-the-wall installation 38 558 00M needs to be ordered separately



38 748 002

Rapid SL

Element for wash basin with roughin-in set for infra-red electronic
suitable for trim sets Essence E 36 447 000 and Eurocube E 36 442 000

1.13 m installation height

for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
wash basin fixing bolts M10 with fixing device for ceramic
variable distance of fixing bolts

HT-outlet bend Ø 50 mm

seal Ø 32 mm

pre-mounted roughing-in set with protecting block
fire-proof pipe for laying electronic cables
installation box with water group, stop valve and flush elbow

connection with noise protected fitting holder 1/2"

connecting box for mains supply 230 V

CE approved

for installation with pre-mixed or cold water

for on-the-wall installation 38 558 00M needs to be ordered separately



38 553 001

Rapid SL

Element for bidet, 1.13 m installation height

vertical support for ceramics with small bearing area (< 205 mm)
powder coated steel frame, self-supporting

for on-the-wall installations or studded walls
pre-assembled

height adjustable fitting connections

TÜV approved

bidet fixing bolts

HT-outlet bend Ø 50 mm

seal Ø 32 mm



2 fitting connections 1/2"

for on-the-wall installation 38 558 00M needs to be ordered separately

GROHE RAPID SL FOR WASH BASIN AND BIDET

Ref. no.

Colour



38 543 000

Rapid SL

Element for bidet, 0.82 m installation height

powder coated steel frame, self-supporting

for on-the-wall installations or studded walls

pre-assembled

height adjustable fitting connections

TÜV approved

bidet fixing bolts

HT-outlet bend Ø 50 mm

seal Ø 32 mm

2 fitting connections 1/2"

for on-the-wall installation 38 558 00M needs to be ordered separately

GROHE RAPID SL FOR SUPPORT RAILS

Ref. no.

Colour

39 140 000

Rapid SL

Element for WC, 1.13 m installation height
with fixing element for back support and support rails
for WC bowls 70 cm projection

for on-the-wall installations or studded walls
powder coated steel frame, self-supporting
for dry-cladding, completely pre-assembled
with fixed connections

TÜV approved

2 WC fixing bolts

4 wall brackets

distance of fixing bolts 180/230 mm

PP outlet bend Ø 90 mm

depth adjustable

PP reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GD 2, containing following features:

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop
or single flush

water supply from left/right or back

low noise (group I acc. to German Noise Specification)

insulated against condensation

1/2" water supply connection including integrated angle valve and push fit


flexible hose union

no tools required for installation of inspection shaft




for vertical or horizontal use

including wall brackets 38 558 00M for on-the-wall installation

for mounting of small flush plates revision shaft 40 911 000 needs to be ordered
separately




GROHE RAPID SL ACCESSORIES
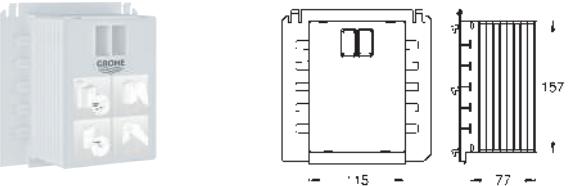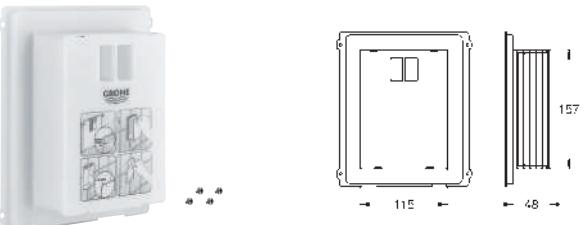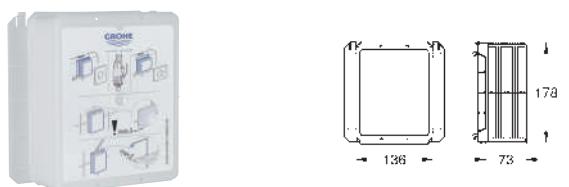
| | Ref. no. | Colour |
|---|--|--------|
|  | 38 558 00M Rapid SL Wall brackets for on-the-wall installations for fixing elements at the brick-wall or in front of the studded wall steady vertical adjustment from 130 - 230 mm cladding for single or series installation 2 pieces | chrome |
|  | 39 699 000 Wall brackets for slim cistern for use with 88.9 mm cistern | |
|  | 40 911 000 Revision shaft for small flush plates for combination with Rapid SL and Uniset with GD 2 cisterns | |
|  | 40 949 000 Revision shaft for small flush plates for combination with 80 mm cistern | chrome |
|  | 66 791 000 Revision shaft for combination with Rapid SLX cisterns | chrome |
|  | 42 632 00M 4" outlet adaptor for Rapid SL material HDPE to enable welding packaging unit: 10 pieces | |

GROHE RAPIDO SHOWER FRAME

Ref. no.


Colour



103993 999 0

Rapido Shower Frame

Element for mono concealed shower installation
 for shower installations with one hand shower and a Mono head shower
 pre-mounted rough-in set GROHE Rapido SmartBox (35 604)
 pre-mounted wall outlets for hand and head shower
 pre-mounted and insulated mixed water pipes
 for on-the-wall installations or dry-cladding
 powder coated steel frame, self-supporting
 completely pre-assembled
 depth adjustable
 2 inlets below, 1/2"
 min. installation depth (from rough wall to end finish) 77-107 mm
 min. installation depth (from rough wall to frame front) 67 mm
 head shower outlet height adjustable by 180 mm
 sealing fleeces
 leak test done ex factory
 suitable for concealed 2-function trim sets
 suitable for GROHE shower outlet elbows with male connection threads, 1/2"
 suitable for GROHE shower arms with male connection threads, 1/2"
 for on-the-wall installation please order wall brackets 103 999 9990 (sold separately)

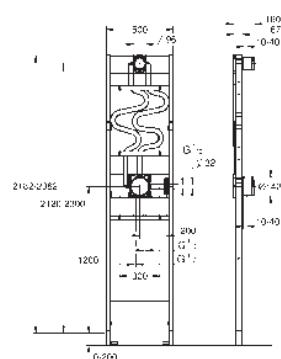

103994 999 0

Rapido Shower Frame

Element for duo concealed shower installation
 for shower installations with one hand shower and a duo spray head shower
 pre-mounted rough-in set GROHE Rapido SmartBox (35 604)
 pre-mounted rough-in set 9.5 l/min for head shower (26 484)
 pre-mounted wall outlet for hand shower
 pre-mounted and insulated mixed water pipes
 for on-the-wall installations or dry-cladding
 powder coated steel frame, self-supporting
 completely pre-assembled
 depth adjustable
 2 inlets below, 1/2"
 min. installation depth (from rough wall to end finish) 77-107 mm
 min. installation depth (from rough wall to frame front) 67 mm
 head shower outlet height adjustable by 180 mm
 sealing fleeces
 leak test done ex factory
 suitable for concealed 3-function trim sets
 suitable for GROHE shower outlet elbows with male connection threads, 1/2"
 suitable for Rainshower SmartActive 310 2-spray head shower with 430 mm shower arm
 for on-the-wall installation please order wall brackets 103 999 9990 (sold separately)



103999 999 0


Wall brackets

for against-the-wall installations
 for fixing elements at the brick-wall or in front of the studded wall
 adjustment 85 - 145 mm
 installation depth (from rough wall to frame front) 112 - 172 mm
 4 pieces
 professional edition

GROHE UNISET FRAMES AND ACCESSORIES

Ref. no.

Colour



39 840 000

Uniset Slim

Element for WC with flushing cistern 88.9 mm

inlet and outlet connecting set

angle valve 15 mm (1/2")

2 WC fixing bolts

distance of fixing bolts 180/230 mm

Shortable inspection shaft incl. protection during construction phase, for vertical use

for mounting of small flush plates revision shaft 40 949 000 to be ordered separately

flushing cistern SLIM, 3 - 6 l, containing following features:


adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

water supply from top

for on-the-wall installation wall brackets 39 699 000 need to be ordered separately

support feet (37 304 000)



39 452 000

chrome

Uniset


3-in-1 set for WC

with flushing cistern GD 2

Uniset element for WC (38 643 001)

Skate Air flush plate, chrome, vertical installation (38 505 000)

support feet (37 304 000)



38 723 001


Uniset

2-in-1 set for WC

with flushing cistern GD 2

Uniset element for WC (38 643 001)

Skate Air flush plate, chrome, vertical installation (38 505 000)



38 825 000

chrome

Uniset

2-in-1 set for WC

with flushing cistern GD 2


Uniset element for WC (38 643 001)

Skate Cosmopolitan flush plate, chrome (38 732 000)

GROHE UNISET FRAMES AND ACCESSORIES

Ref. no.

Colour



38 643 001

Uniset

Element for WC with EPS housing
sound-insulating EPS module for masonry-in
830 x 480 x 130 mm


rail adaptors for modular fixing
wall rail with fixing accessories for single installation
2 WC fixing bolts, distance of fixing bolts 180/230 mm
outlet bend Ø 90 mm, depth adjustable
reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GD 2, containing following features:

adjustment ex factory 6 l and 3 l
pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
water supply from left/right/back or top
low noise (group I acc. to German Noise Specification)
insulated against condensation
1/2" water supply connection including integrated angle valve and push fit
flexible hose union
for vertical or horizontal use
no tools required for installation of inspection shaft

preparation for shower toilets with additional accessory 40 899 000
for mounting of small flush plates revision shaft 40 911 000 needs to be ordered separately



38 642 001

Uniset

Element for WC with EPS housing and support feet
sound-insulating EPS module for masonry-in
830 x 470 x 130 mm


rail adaptors for modular fixing
wall rail with fixing accessories for single installation
2 WC fixing bolts, distance of fixing bolts 180/230 mm
outlet bend Ø 90 mm, depth adjustable
reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GD 2, containing following features:

adjustment ex factory 6 l and 3 l
pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
water supply from left/right/back or top
low noise (group I acc. to German Noise Specification)
insulated against condensation
1/2" water supply connection including integrated angle valve and push fit
flexible hose union
no tools required for installation of inspection shaft

preparation for shower toilets with additional accessory 40 899 000
for mounting of small flush plates revision shaft 40 911 000 needs to be ordered separately



39 165 000

Uniset

Element for WC

778 x 440 x 116 mm
for single installation
2 WC fixing bolts, distance of fixing bolts 180/230 mm
outlet bend Ø 90 mm
reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern GD 2, containing following features:


adjustment ex factory 6 l and 3 l
pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
water supply from left/right/back or top
low noise (group I acc. to German Noise Specification)
cistern insulated against condensation
1/2" angle valve with push fit flexible hose union
no tools required for installation of inspection shaft
for vertical or horizontal use

preparation for shower toilets with additional accessory 40 899 000
for mounting of small flush plates revision shaft 40 911 000 needs to be ordered separately

GROHE UNISET FRAMES AND ACCESSORIES

Ref. no.

Colour



39 683 000

Uniset Slim

Element for WC with flushing cistern 88.9 mm
module for masonry-in
793 x 426 x 130 mm

2 WC fixing bolts, distance of fixing bolts 180/230 mm
outlet bend Ø 90 mm, depth adjustable
reducer Ø 90/110 mm

inlet and outlet connecting set

flushing cistern SLIM, 3 - 6 l, containing following features:

adjustment ex factory 6 l and 3 l

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

water supply from top

1/2" water supply connection including integrated angle valve and push fit


flexible hose union

low noise (group I acc. to German Noise Specification)

insulated against condensation

Shortable inspection shaft incl. protection during construction phase, for vertical use

for mounting of small flush plates revision shaft 40 949 000 to be ordered separately



38 729 000

Uniset

Element for WC with flushing cistern 80 mm

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

outlet bend Ø 80 mm

inlet and outlet connecting set

steel frame, hot galvanized, with 4 fixing brackets

2 WC fixing bolts, distance of fixing bolts 180/230 mm

fixing device for ceramic

water supply connection from top

low noise (group I acc. to German Noise Specification)


with plaster base coating made of vinyl fleece

angle valve 15 mm (1/2")

with push fit flexible hose union

Shortable inspection shaft incl. protection during construction phase, for vertical use

for mounting of small flush plates revision shaft 40 949 000 to be ordered separately



38 415 001

Uniset

Element for WC, 0.82 m installation height

front or top actuation

sound-insulating EPS module for masonry-in

rail adaptors for modular fixing

wall rail with fixing accessories for single installation

2 WC fixing bolts, distance of fixing bolts 180/230 mm

outlet bend Ø 90 mm

depth adjustable

inlet and outlet connecting set

flushing cistern containing the following features:

pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush

water supply from left/right or top

low noise (group I acc. to German Noise Specification)


insulated against condensation

1/2" water supply connection

angle valve 15 mm (1/2")

Shortable inspection shaft incl. protection during construction phase

preparation for shower toilets with additional accessory 40 899 000
for mounting of small flush plates please order revision shaft 40 950 000 (sold separately)



37 578 001

Uniset

Element for bidet with EPS housing

sound-insulating EPS module for masonry-in with closed surface

rail adaptors for modular fixing

wall rail with fixing accessories for single installation

bidet fixing bolts

height adjustabel fitting and outlet connections

HT-outlet bend Ø 50 mm

seal Ø 32 mm


2 variable fitting connections

for on-the-wall installation please order support feet 37 304 000 (sold separately)

GROHE UNISET FRAMES AND ACCESSORIES

Ref. no.


Colour



38 703 000

Uniset


Element for bidet
steel frame, hot galvanized, with 4 fixing brackets
2 bidet fixing bolts
height adjustabel fitting and outlet connections
HT-outlet bend Ø 50 mm
seal Ø 32 mm
2 variable fitting connections 1/2"



37 304 000


Uniset

Support feet
matching Uniset for WC and bidet
made of hot galvanized steel
fixing material
for on-the-wall installations



40 911 000

Revision shaft for small flush plates
for combination with Rapid SL and Uniset with GD 2 cisterns



40 949 000

chrome

Revision shaft for small flush plates
for combination with 80 mm cistern

GROHE FLUSHING SYSTEMS





CONTENTS

| | | |
|--------|-----------------------------------|-----|
| WC | Flushing cisterns | 462 |
| | Accessories for flushing cisterns | 463 |
| | WC flush valves | 466 |
| | Electronic actuations for WC | 468 |
| Urinal | Electronic actuations for urinal | 470 |
| | Urinal flush valves | 473 |

GROHE FLUSHING CISTERNS

Ref. no. Colour



38 661 000 chrome
Flushing cistern GD 2
adjustment ex factory 6 l and 3 l
pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
water supply from left/right/back or top
low noise (group I acc. to German Noise Specification)
insulated against condensation
1/2" water supply connection including integrated angle valve and push fit
flexible hose union
no tools required for installation of inspection shaft
for vertical or horizontal use
flush pipe insulated against condensation
fixing brackets
for mounting of small flush plates revision shaft 40 911 000 needs to be ordered separately



39 694 000
Solo Slim
Flushing cistern for WC 88.9 mm
flushing cistern SLIM, 3 - 6 l, containing following features:
adjustment ex factory 6 l and 3 l
pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
water supply from top
1/2" water supply connection including integrated angle valve and push fit
flexible hose union
low noise (group I acc. to German Noise Specification)
insulated against condensation
Shortable inspection shaft incl. protection during construction phase, for vertical use
for mounting of small flush plates revision shaft 40 949 000 to be ordered separately



38 863 000
Flushing cistern for WC 80 mm
pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
water supply connection from top
low noise (group I acc. to German Noise Specification)
with push fit flexible hose union
angle valve 15 mm (1/2")
Shortable inspection shaft incl. protection during construction phase, for vertical use
fixing brackets
without wall plate/actuation
GROHE Water Saving - Less water, perfect flow
for mounting of small flush plates revision shaft 40 949 000 to be ordered separately




38 422 000
Flushing cistern for WC
0.82 m installation height
dual flush discharge valve, pneumatic
front or top actuation
water supply from left/right or top
low noise (group I acc. to German Noise Specification)
insulated against condensation
415 x 410 x 360 mm
1/2" water supply connection
fixing brackets
flush pipe
Shortable inspection shaft incl. protection during construction phase
for mounting of small flush plates please order revision shaft 40 950 000 (sold separately)

GROHE ACCESSORIES FOR FLUSHING CISTERNS

Ref. no.

Colour



37 095 000

chrome

Filling valve

3/8"


universal application

without adapter for the pipe connection

cap, restrictor

**) max. shortening 100 mm


37 092 000
ditto, with adapter



43 537 000

Filling valve

for concealed flushing cisterns 6 l



37 522 PIO

matt chrome/chrome

Servo-set

retrofit unit for close-coupled
flushing cisterns

connection from below

with filling valve, servo discharge valve


interruptible flush cycle

fixing set with 100 mm screws and cellular rubber joint Ø 100 mm
centring for filling and discharge valve

when having larger bore holes

GROHE Long-Life finish

**) max. shortening 100 mm



37 521 PIO

matt chrome/chrome

Servo-set

retrofit unit for close-coupled
flushing cisterns

connection from the side

with filling valve, servo discharge valve


interruptible flush cycle

fixing set with 100 mm screws and cellular rubber joint Ø 100 mm
centring for filling and discharge valve

when having larger bore holes

GROHE Long-Life finish

**) max. shortening 100 mm



37 078 PIO

matt chrome/chrome

Servo-set

retrofit unit for close-coupled
flushing cisterns

connection from the side

with filling valve, servo discharge valve

interruptible flush cycle

fixing set with 100 mm screws and cellular rubber joint Ø 100 mm
centring for filling and discharge valve

when having larger bore holes


GROHE Long-Life finish

**) max. shortening 100 mm

GROHE ACCESSORIES FOR FLUSHING CISTERNS

Ref. no.

Colour




37 088 PIO

matt chrome/chrome

Servo discharge valve
interruptible flush cycle
with short discharge valve housing
decide for maintenance opening
and complete before installation
escutcheon
push button for lid holes Ø 16 - 35 mm
fixing material
GROHE Long-Life finish

37 085 PIO


matt chrome/chrome
ditto, with push button for lid hole Ø 40 mm



42 320 000

chrome


Dual Flush discharge valve AV1
AV1 complete with pipe extension
6 - 9 l adjustable
without valve seat
without actuation



42 253 000

chrome

Dual Flush discharge valve AV1
pneumatic discharge valve offering
2 modes of operation: dual flush or
start/stop
including plug seat



37 311 K00

black


WC inlet and outlet connecting set
for wall hung WC
connecting pipe Ø 45 mm
waste sleeve Ø 90 mm
150 mm long
cover for WC fixing bolts



37 489 000

chrome

Extension
for concealed flush pipe
length 200 mm



37 104 K00


black

WC inlet and outlet connecting set
for wall hung WC
connecting pipe Ø 45 mm
length 200 mm
connector
waste sleeve Ø 110 mm
150 mm long
cover for WC fixing bolts

GROHE ACCESSORIES FOR FLUSHING CISTERNS

Ref. no.


Colour



42 327 000

PP-outlet bend Ø 90 mm
variable depth adjustment
including lip seal DN 90

chrome



42 333 000


4.5 l adapter for GD2
to reduce the maximum flush volume to 3.8 l - 6.0 l (big flush) and 1.8 l - 5.0 l (small flush)

chrome




42 300 000

Flow restrictor
reduces flow rate



40 911 000


Revision shaft for small flush plates
for combination with Rapid SL and Uniset with GD 2 cisterns



40 949 000

Revision shaft for small flush plates
for combination with 80 mm cistern

chrome




66 791 000

Revision shaft
for combination with Rapid SLX cisterns


chrome

GROHE WC FLUSH VALVES


Ref. no. Colour



37 349 000 chrome
Rondo A.S.
Flush valve for WC
(3/4")
chrome plated brass
integrated stop valve
GROHE Long-Life finish
for wash-down and wash-out bowls
control cap and connection to
plastic flush pipe
with flow rate adjustment
6 - 9 l adjustable
with escutcheon
flow pressure min 1.2 bar
operating pressure max 5 bar
minimum 1" supply pipe
low noise (group I acc. to German Noise Specification)




37 139 000 chrome
DAL-Automatic flush valve for WC
3/4"
chrome plated brass
GROHE Long-Life finish
for wash-down and wash-out bowls
with flow rate adjustment



37 108 000 chrome
Flush pipe
for WC flush valve
Ø 28 x 26 mm
1000 x 200 mm
straight
chrome plated brass
without flush pipe fixing device
for distance to the wall 15 - 85 mm
connector

GROHE WC FLUSH VALVES

Ref. no. Colour




37 153 000

chrome

Flush valve for WC
concealed installation
($\frac{3}{4}$ "")

stop valve

6 - 9 l adjustable
flow pressure range from 1.2 - 5.0 bar
with flow rate adjustment
box for concealed installation with
flush elbow
flush pipe adjustable in length
without wall plate/actuation
low noise (group I acc. to German Noise Specification)




37 157 000

Flush valve for WC
concealed installation
($\frac{3}{4}$ "")

stop valve

6 - 14 l adjustable
for low pressure
for wash-down and wash-out bowls
flow pressure range from 0.6 - 3.0 bar
(min. static pressure 1.5 bar)
with flow rate adjustment
box for concealed installation with
flush elbow
flush pipe adjustable in length
without wall plate/actuation
volume needed: 1.6 l/sec



37 048 000

Flush valve for WC
concealed installation
($\frac{3}{4}$ "")

stop valve

6 - 9 l adjustable
flow pressure range from 1.2 - 5.0 bar
with flow rate adjustment
2 m connecting cable
box for concealed installation with
flush elbow
concealed flush pipe
without electronic actuation



37 102 SH0

alpine white


Inlet set

connecting pipe from flush pipe of
concealed flush valve 6 to 91 and
concealed flushing cistern
to **pedestal WC**
connector
escutcheon

GROHE ELECTRONIC ACTUATIONS FOR WC

Ref. no.

Colour



38 698 SD1

stainless steel

Tectron Skate

Infra-red electronic for WC flushing cistern
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose
with transformer 100-230 V AC, 50-60 Hz, 6 V DC
for flushing cistern GD 2

servo motor

front plate 156 x 197 mm

7 pre-set programs:


auto flush, cleaning mode, pre-flush on/off

additional functions and precise settings by remote control 36 407

adjustable flush (3 - 9 l) by hand and remote

CE approved

for use with Rapid SLX please order shaft 66 791 000 (sold separately)



38 699 001

chrome

Tectron Surf

Infra-red electronic for WC flushing cistern
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose
GROHE Long-Life finish

with transformer 100-230 V AC, 50-60 Hz, 6 V DC

for flushing cistern GD 2

servo motor

front plate 156 x 197 mm

7 pre-set programs:


auto flush, cleaning mode, pre-flush on/off

additional functions and precise settings by remote control 36 407

adjustable flush (3 - 9 l) by hand and remote

CE approved

for use with Rapid SLX please order shaft 66 791 000 (sold separately)



37 419 000

chrome

37 419 SD0

stainless steel

Tectron Skate

Infra-red electronic for WC flushing cistern
with additional manual actuation
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose
with transformer 100-230 V AC, 50-60 Hz, 6 V DC

for start stop actuation

for flushing cistern GD 2

servo motor

front plate 156 x 197 mm

7 pre-set programs:


auto flush, cleaning mode, pre-flush on/off

additional functions and precise settings by remote control 36 407

adjustable flush (3 - 9 l) by hand and remote

CE approved

for use with Rapid SLX please order shaft 66 791 000 (sold separately)



38 393 SD1

stainless steel

Tectron Skate

Infra-red electronic for WC flush valve
with transformer 100-230 V AC, 50-60 Hz, 6 V DC
concealed installation

front plate 156 x 197 mm

solenoid valve

7 pre-set programs:

auto flush, cleaning mode, pre-flush on/off, additional functions and precise

settings by remote control 36 407


CE approved

for use with concealed WC flush valve 37 048 000 and 38 519 001

GROHE ELECTRONIC ACTUATIONS FOR WC

Ref. no.

Colour



39 881 000
39 881 SH0
39 881 KF0

chrome
alpine white
phantom black

Tectron Bau E

Infra-red electronic for WC flushing cistern
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose

GROHE Long-Life finish

with transformer (42470000) 100-230 V AC 50-60 Hz, 6.75 V 4 W DC
for new installations and retrofit to all GD2 cisterns

servo motor

front plate 156 x 197 mm

hidden anti-theft device


7 pre-set programs:

auto flush, cleaning mode, pre-flush on/off

additional functions and precise settings by remote control 36 407

adjustable flush (3 - 9 l) by hand and remote

CE approved



39 882 000
39 882 SH0
39 882 KF0

chrome
alpine white
phantom black

Tectron Bau E

Infra-red electronic for WC flushing cistern
with infrared sensor for bi-directional communication
for monitoring, configuration and service purpose

GROHE Long-Life finish

6V lithium battery, type CR-P2

for new installations and retrofit to all GD2 cisterns

servo motor

front plate 156 x 197 mm

hidden anti-theft device

7 pre-set programs:

auto flush, cleaning mode, pre-flush on/off

additional functions and precise settings by remote control 36 407

adjustable flush (3 - 9 l) by hand and remote

CE approved




36 340 000

Power extension cable
length 3.00 m

GROHE ELECTRONIC ACTUATIONS FOR URINAL

Ref. no.

Colour



37 421 000

chrome

Tectron Rondo

Infra-red electronic for Urinal

with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

metal housing

exposed installation

flow pressure min 0.5 bar

operating pressure max 10 bar

with **integrated stop valve**

flush pipe with rubber connector

multistage battery status display

7 pre-set programs:

auto flush

cleaning mode

pre-flush on/off

additional functions and precise settings by remote control 36 407


adjustable flow time by hand or remote

CE approved

GROHE ELECTRONIC ACTUATIONS FOR URINAL

Ref. no.

Colour



37 336 001 chrome

Tectron Surf

Infra-red electronic for Urinal

with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

with transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

cartridge with solenoid valve and dirt strainer

front plate 116 x 144 mm

flow pressure min 0.5 bar, operating pressure max 10 bar

7 pre-set programs:

auto flush, cleaning mode, pre-flush on/off


additional functions and precise settings by remote control 36 407

adjustable flow time by hand or remote

set for final installation

for Rapido U

CE approved



37 337 001 chrome

Tectron Surf

Infra-red electronic for Urinal

with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

cartridge with solenoid valve and dirt strainer

front plate 116 x 144 mm

flow pressure min 0.5 bar, operating pressure max 10 bar

multistage battery status display

7 pre-set programs:

auto flush, cleaning mode, pre-flush on/off


additional functions and precise settings by remote control 36 407

adjustable flow time by hand or remote

set for final installation

for Rapido U or Rapido UMB

CE approved



37 321 001 chrome
37 321 SD1 stainless steel

Tectron Skate

Infra-red electronic for Urinal

with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

with transformer 100-230 V AC, 50-60 Hz, 6 V DC

GROHE Long-Life finish

cartridge with solenoid valve and dirt strainer

front plate 116 x 144 mm

flow pressure min 0.5 bar, operating pressure max 10 bar

7 pre-set programs:

auto flush, cleaning mode, pre-flush on/off


additional functions and precise settings by remote control 36 407

adjustable flow time by hand or remote

set for final installation

for Rapido U

CE approved



37 324 001 chrome
37 324 SD1 stainless steel

Tectron Skate

Infra-red electronic for Urinal

with infrared sensor for bi-directional communication

for monitoring, configuration and service purpose

6V lithium battery, type CR-P2

battery lifetime: approx. 7 years (150 actuations a day)

GROHE Long-Life finish

cartridge with solenoid valve and dirt strainer

front plate 116 x 144 mm

flow pressure min 0.5 bar, operating pressure max 10 bar

multistage battery status display

7 pre-set programs:

auto flush, cleaning mode, pre-flush on/off

additional functions and precise settings by remote control 36 407

adjustable flow time by hand or remote

set for final installation


for Rapido U or Rapido UMB

CE approved

GROHE ELECTRONIC ACTUATIONS FOR URINAL

Ref. no.

Colour




37 338 000

chrome

GROHE Rapido U

roughing-in set for urinal
for manual actuation or Tectron infra-red electronic 6 V or 230 V
stop valve
flow pressure min 0.5 bar
operating pressure max 10 bar
flush aid
functional unit checked ex factory
water supply connections 1/2" outer thread
connecting box for mains supply
installation box with gasket
fixing points for dry cladding and masonry-in
shortable inspection shaft incl. protection




36 407 001

chrome

Remote control


for all GROHE one eye infra-red products as of 06/2015
monitoring
consumption and usage data
thermal disinfection cycles
auto flush cycles
configuration
cleaning mode on/off
thermal disinfection
detection range
shut off delay
auto flush
service
send and save profile
reset to factory or user settings
service details, demo mode
3 x 1.5 V DC (AAA) battery supply



39 368 000

Temperature sensor for urinal

with transformer 100-240 V AC, 50-60 Hz, 6.75 V DC
siphon with temperature sensor
cartridge with solenoid valve and dirt strainer
flow pressure min 0.5 bar
operating pressure max 10 bar
7 pre-set programs:
auto flush, cleaning mode, pre-flush on/off
CE approved




39 367 000

Temperature sensor for urinal


6V lithium battery, type CR-P2
with water connection set and stop valve
siphon with temperature sensor
cartridge with solenoid valve and dirt strainer
flow pressure min 0.5 bar
operating pressure max 10 bar
7 pre-set programs:
auto flush, cleaning mode, pre-flush on/off
CE approved

GROHE URINAL FLUSH VALVES


Ref. no. Colour




| | |
|--|--------|
| 37 339 000 | chrome |
| Rondo | |
| Flush valve for urinal | |
| 15 mm (1/2") | |
| chrome plated brass | |
| integrated stop valve | |
| GROHE Long-Life finish | |
| with control cap and flush pipe connection | |
| flow rate adjustment | |
| flush volume adjustable 1.0 - 4.0 l | |
| with wall escutcheon | |
| flush pipe 200 mm | |
| rubber connector with escutcheon | |
| flow pressure min 0.5 bar | |
| operating pressure max 5 bar | |
| minimum 1" supply pipe | |




| | |
|--|--------|
| 37 342 000 | chrome |
| Rondo | |
| Flush valve for urinal | |
| 15 mm (1/2") | |
| chrome plated brass | |
| vandal proof by metal actuation knob | |
| integrated stop valve | |
| GROHE Long-Life finish | |
| with control cap and flush pipe connection | |
| flow rate adjustment | |
| flush volume adjustable 1.0 - 4.0 l | |
| with wall escutcheon | |
| flush pipe 200 mm | |
| rubber connector with escutcheon | |
| flow pressure min 0.5 bar | |
| operating pressure max 5 bar | |
| minimum 1" supply pipe | |



| | |
|---------------------------------|--------|
| 37 396 000 | chrome |
| Press urinal flush valve | |
| 15 mm (1/2") | |
| chrome plated brass | |
| GROHE Long-Life finish | |
| with wall escutcheon | |



| | |
|---------------------------------------|--------|
| 37 044 000 | chrome |
| Inlet connecting set | |
| for urinal bowls with inlet from back | |
| connector Ø 33.5 - 38 mm | |



| | |
|---------------------------------------|--------|
| 37 044 000 | chrome |
| Inlet connecting set | |
| for urinal bowls with inlet from back | |
| connector Ø 33.5 - 38 mm | |

GROHE ACTUATIONS






CONTENTS

| | | |
|--------|----------------------------------|-----|
| WC | Flush plates for WC | 476 |
| | GROHE Fresh | 483 |
| | Flush plates for WC flush valves | 484 |
| Urinal | Flush plates for urinal | 485 |

GROHE FLUSH PLATES FOR WC

Ref. no. Colour



| | |
|------------|-----------------------|
| 37 535 000 | chrome |
| 37 535 P00 | matt chrome |
| 37 535 SH0 | alpine white |
| 37 535 DC0 | supersteel |
| 37 535 GL0 | cool sunrise |
| 37 535 GN0 | brushed cool sunrise |
| 37 535 DAO | warm sunset |
| 37 535 DL0 | brushed warm sunset |
| 37 535 A00 | hard graphite |
| 37 535 AL0 | brushed hard graphite |

Skate Cosmopolitan S

Flush plate
for dual flush
for pneumatic discharge valve AV1
GD 2 cistern
vertical installation

130 x 172 mm


material: ABS

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
flush plate with magnetic holder and fixing brackets included
compatible with Rapid SLX

for use with Rapid SL and Uniset with GD 2 cistern please order shaft 40 911 000
for use with Rapid SL and Uniset 0.82 m installation height please order shaft
40 950 000 (sold separately)

37 535 KF0 phantom black
ditto, Professional exclusive



| | |
|------------|-----------------------|
| 37 601 000 | chrome |
| 37 601 P00 | matt chrome |
| 37 601 SH0 | alpine white |
| 37 601 DC0 | supersteel |
| 37 601 GL0 | cool sunrise |
| 37 601 GN0 | brushed cool sunrise |
| 37 601 DAO | warm sunset |
| 37 601 DL0 | brushed warm sunset |
| 37 601 A00 | hard graphite |
| 37 601 AL0 | brushed hard graphite |

Nova Cosmopolitan S

Flush plate
for dual flush
for pneumatic discharge valve AV1
GD 2 cistern
vertical installation

130 x 172 mm


material: ABS

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
flush plate with magnetic holder and fixing brackets included
compatible with Rapid SLX

for use with Rapid SL and Uniset with GD 2 cistern please order shaft 40 911 000
for use with Rapid SL and Uniset 0.82 m installation height please order shaft
40 950 000 (sold separately)

37 601 KF0 phantom black
ditto, Professional exclusive



38 809 000 chrome

Nova Cosmopolitan Light

Flush plate
for dual flush
external highlighted outline
with LEDs in blue, red, yellow, white
colour gradient adjustable
on/off button
timer for individual regulation of illuminating period
3 m connecting cable

transformer for external installation

operating voltage 230 V AC, 50/60 Hz, 2.0 VA

Product contains built-in LED lamps, which

cannot be changed: energy efficiency class: A+

CE approved

for pneumatic discharge valve AV1

vertical and horizontal installation

156 x 197 mm

material: ABS

GROHE Long-Life finish


GROHE Water Saving - Less water, perfect flow

for combination with Rapid SL and Uniset with GD 2 cisterns

for use with Rapid SLX please order shaft 66 791 000 (sold separately)

GROHE FLUSH PLATES FOR WC

Ref. no. Colour



| | |
|------------|-----------------------|
| 37 624 000 | chrome |
| 37 624 P00 | matt chrome |
| 37 624 SH0 | alpine white |
| 37 624 DC0 | supersteel |
| 37 624 GL0 | cool sunrise |
| 37 624 GN0 | brushed cool sunrise |
| 37 624 DAO | warm sunset |
| 37 624 DL0 | brushed warm sunset |
| 37 624 A00 | hard graphite |
| 37 624 AL0 | brushed hard graphite |

Arena Cosmopolitan S

Flush plate
for dual flush
for pneumatic discharge valve AV1
GD 2 cistern
vertical installation

130 x 172 mm


material: ABS

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
flush plate with magnetic holder and fixing brackets included
compatible with Rapid SLX

for use with Rapid SL and Uniset with GD 2 cistern please order shaft 40 911 000
for use with Rapid SL and Uniset 0.82 m installation height please order shaft
40 950 000 (sold separately)

37 624 KF0 phantom black
ditto, Professional exclusive




40 911 000

Revision shaft for small flush plates

for combination with Rapid SL and Uniset with GD 2 cisterns

40 949 000 chrome
ditto, for combination with SLIM cistern



| | |
|------------|--------------|
| 38 765 000 | chrome |
| 38 765 SH0 | alpine white |
| 38 765 P00 | matt chrome |

Nova Cosmopolitan

Flush plate
for dual flush
for pneumatic discharge valve AV1
vertical and horizontal installation


156 x 197 mm

material: ABS

GROHE Long-Life finish

GROHE Water Saving - Less water, perfect flow
for combination with Rapid SL and Uniset with GD 2 cisterns
for use with Rapid SLX please order shaft 66 791 000 (sold separately)

38 765 KF0 phantom black
38 765 KV0 glossy black
ditto, Professional exclusive



| | |
|------------|----------------------|
| 38 845 LS0 | moon white |
| 38 845 KS0 | velvet black |
| 38 845 MF0 | chrome/daVinci satin |

Skate Cosmopolitan

Flush plate
with glass surface
for dual flush
for pneumatic discharge valve AV1
vertical and horizontal installation

156 x 197 mm

made of security glass

mounting-set


GROHE Water Saving

- Less water, perfect flow
for combination with Rapid SL and Uniset with GD 2 cisterns


for use with Rapid SLX please order shaft 66 791 000 (sold separately)

GROHE FLUSH PLATES FOR WC


Ref. no. Colour



38 916 0AO mirror glass
Skate Cosmopolitan
Flush plate
with mirror surface
plastic actuation buttons, titanium
for dual flush
for pneumatic discharge valve AV1
vertical and horizontal installation
156 x 197 mm
made of security glass
mounting-set
GROHE Water Saving - Less water, perfect flow
for combination with Rapid SL and Uniset with GD 2 cisterns
for use with Rapid SLX please order shaft 66 791 000 (sold separately)




38 821 000 chrome
Skate Cosmopolitan
Flush plate
for dual flush
vandal-proof
for pneumatic discharge valve AV1
vertical installation
156 x 197 mm
made of brass
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
for combination with Rapid SL and Uniset with GD 2 cisterns
for use with Rapid SLX please order shaft 66 791 000 (sold separately)



38 732 SD0 stainless steel
Skate Cosmopolitan
Flush plate, stainless steel
for dual flush
for pneumatic discharge valve AV1
vertical installation
156 x 197 mm
plastic fixing frame
not suitable for GROHE Fresh
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
for combination with Rapid SL and Uniset with GD 2 cisterns
for use with Rapid SLX please order shaft 66 791 000 (sold separately)

38 776 SD0 stainless steel
ditto, horizontal installation




38 732 000 chrome
38 732 DC0 supersteel
38 732 SH0 alpine white
38 732 P00 matt chrome
38 732 GL0 cool sunrise
38 732 GN0 brushed cool sunrise
38 732 DAO warm sunset
38 732 DL0 brushed warm sunset
38 732 A00 hard graphite
38 732 AL0 brushed hard graphite
Skate Cosmopolitan
Flush plate
for dual flush
for pneumatic discharge valve AV1
vertical and horizontal installation
156 x 197 mm
material: ABS
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
for combination with Rapid SL and Uniset with GD 2 cisterns
for use with Rapid SLX please order shaft 66 791 000 (sold separately)

38 732 KF0 phantom black
38 732 KV0 glossy black
ditto, Professional exclusive


38 732 BR0 titanium
ditto, with anti-fingerprint surface

GROHE FLUSH PLATES FOR WC

Ref. no. Colour




38 732 SHH alpine white
Skate Cosmopolitan
Flush plate
 for dual flush
 for pneumatic discharge valve AV1
 vertical and horizontal installation
 156 x 197 mm
 material: ABS
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
 anti-bacterial finish for increased hygiene
 for combination with Rapid SL and Uniset with GD 2 cisterns
 for use with Rapid SLX please order shaft 66 791 000 (sold separately)



38 844 000 chrome
 38 844 SH0 alpine white
 38 844 P00 matt chrome
Arena Cosmopolitan
Flush plate
 for dual flush
 for pneumatic discharge valve AV1
 vertical installation
 156 x 197 mm
 material: ABS
GROHE Water Saving - Less water, perfect flow
GROHE Long-Life finish
 for combination with Rapid SL and Uniset with GD 2 cisterns
 for use with Rapid SLX please order shaft 66 791 000 (sold separately)

38 844 KF0 phantom black
 38 844 KV0 glossy black
 ditto, Professional exclusive


38 858 000 chrome
 38 858 P00 matt chrome
 38 858 SH0 alpine white
 ditto, horizontal installation



38 505 000 chrome
 38 505 SH0 alpine white
 38 505 P00 matt chrome
Skate Air
Flush plate
 for dual flush
 for pneumatic discharge valve AV1
 vertical installation
 156 x 197 mm
 material: ABS
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
 for combination with Rapid SL and Uniset with GD 2 cisterns
 for use with Rapid SLX please order shaft 66 791 000 (sold separately)




38 505 KF0 phantom black
 38 505 KV0 glossy black
 ditto, Professional exclusive

38 506 000 chrome
 38 506 SH0 alpine white
 38 506 P00 matt chrome
 ditto, horizontal installation



38 505 SHH alpine white
Skate Air
Flush plate
 for dual flush
 for pneumatic discharge valve AV1
 vertical installation
 156 x 197 mm
 material: ABS
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
 anti-bacterial finish for increased hygiene
 for combination with Rapid SL and Uniset with GD 2 cisterns
 for use with Rapid SLX please order shaft 66 791 000 (sold separately)

GROHE FLUSH PLATES FOR WC

| | Ref. no. | Colour |
|---|--|---------------------------------------|
|  | 38 862 000 38 862 SH0 38 862 P00 | chrome alpine white matt chrome |
|  | Skate Flush plate for dual flush for pneumatic discharge valve AV1 vertical and horizontal installation 156 x 197 mm material: ABS GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow for combination with Rapid SL and Uniset with GD 2 cisterns for use with Rapid SLX please order shaft 66 791 000 (sold separately) | |
|  | 38 862 SD0 | stainless steel |
|  | Skate Flush plate for dual flush for pneumatic discharge valve AV1 vertical installation 156 x 197 mm material: stainless steel GROHE Water Saving - Less water, perfect flow for combination with Rapid SL and Uniset with GD 2 cisterns for use with Rapid SLX please order shaft 66 791 000 (sold separately) | |
|  | 38 861 000 | chrome |
|  | Surf Flush plate for dual flush for pneumatic discharge valve AV1 vertical and horizontal installation 156 x 197 mm material: ABS GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow for combination with Rapid SL and Uniset with GD 2 cisterns for use with Rapid SLX please order shaft 66 791 000 (sold separately) | |


GROHE FLUSH PLATES FOR WC

| | Ref. no. | Colour |
|---|--|----------------------------|
|  | 38 564 000 38 564 SH0 Skate Air Flush plate for start stop actuation for pneumatic discharge valve vertical installation 156 x 197 mm material: ABS GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow | chrome alpine white |
|  | 38 565 000 38 565 SH0 ditto, horizontal installation | chrome alpine white |
|  | 38 573 000 38 573 SH0 Skate Flush plate for start stop actuation for pneumatic discharge valve vertical and horizontal installation 156 x 197 mm material: ABS GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow | chrome alpine white |
|  | 38 672 SD0 Skate Flush plate, stainless steel for start stop actuation vandal-proof for pneumatic discharge valve vertical installation 156 x 197 mm push button actuation plastic fixing frame hidden fixing screws GROHE Water Saving - Less water, perfect flow | stainless steel |
|  | 38 574 000 Surf Flush plate for start stop actuation for pneumatic discharge valve vertical and horizontal installation 156 x 197 mm material: ABS GROHE Long-Life finish GROHE Water Saving - Less water, perfect flow | chrome |
|  | 38 915 KS0 38 915 LS0 Veris Light Flush plate for dual flush for SoftTouch flushing activation external highlighted outline with LEDs in blue, red, yellow, white colour gradient adjustable on/off timer for individual regulation of illuminating period 3 m connecting cable transformer for external installation servo motor 110 V to 240 V 50/60 Hz broad range power supply, 9 VA CE approved for GD 2 cisterns with pneumatic discharge valve AV1 200 x 200 mm made of security glass GROHE Water Saving - Less water, perfect flow | velvet black moon white |

GROHE FLUSH PLATES FOR WC

Ref. no.

Colour




37 060 000

chrome



Pneumatic actuation
GROHE Long-Life finish
push button actuation with
escutcheon Ø 100 mm
pneumatic hose 1.50 m
without flush plate

GROHE FRESH

Ref. no. Colour



38 805 000 chrome
Skate Cosmopolitan Set Fresh
Flush plate
 for dual flush
 with **GROHE Fresh**
 fixing frame with opening function
 with box for support of aromatic tabs
 for chlorine-free tabs only
 for pneumatic discharge valve AV1
 vertical and horizontal installation
 156 x 197 mm
 material: ABS
GROHE Long-Life finish
GROHE Water Saving - Less water, perfect flow
 for combination with Rapid SL and Uniset with GD 2 cisterns
 for use with Rapid SLX please order shaft 66 791 000 (sold separately)



38 796 000 chrome
GROHE Fresh
Adaptor
 for GROHE flushing cistern GD 2 with pneumatic
 discharge valve and regular inspection shaft
 not suitable for Skate Cosmopolitan with
 wood or glass surface
 fixing frame with opening function
 with box for support of aromatic tabs
 for chlorine-free tabs only
 for all GROHE flush plates
 156 x 197 mm



38 882 000
GROHE Fresh
Tabs
 2 x 50 g WC tabs
 every flush creates foam which cleans the toilet
 fragrance ensures long-lasting freshness
 protects against re-pollution and maintains long term cleanliness
 reduces limescale and ensures radiant purity in the toilet
 true feeling of freshness
 This product is a hazardous substance. Find more information in the safety data sheet. You can download the safety data at: www.grohe.com/safety-data-sheets/

GROHE FLUSH PLATES FOR WC FLUSH VALVES

| | Ref. no. | Colour |
|--|--|---------------------------------------|
|  | 37 547 000 37 547 P00 37 547 SH0 Skate Flush plate vertical installation 156 x 197 mm manual activation push button actuation material: ABS GROHE Long-Life finish | chrome matt chrome alpine white |
|  | 38 445 SD0 Skate Flush plate, stainless steel vertical installation 156 x 197 mm push button actuation plastic fixing frame hidden fixing screws | stainless steel |
|  | 37 063 000 37 063 SH0 Surf Flush plate 156 x 197 mm manual activation push button actuation material: ABS GROHE Long-Life finish | chrome alpine white |

GROHE FLUSH PLATES FOR URINAL

| | Ref. no. | Colour |
|---|--|---------------------------------------|
|  | 38 784 000 38 784 SH0 38 784 P00 Skate Cosmopolitan Actuation plate manual activation for urinal set for final installation for Rapido U or Rapido UMB 116 x 144 mm mechanical functional cartridge flow pressure min 0.5 bar operating pressure max 6 bar 1.0 - 6.0 adjustable GROHE Long-Life finish | chrome alpine white matt chrome |
|  | 38 784 SD0 Skate Cosmopolitan Flush plate, stainless steel manual activation for urinal set for final installation for Rapido U or Rapido UMB 116 x 144 mm mechanical functional cartridge flow pressure min 0.5 bar operating pressure max 6 bar 1.0 - 6.0 adjustable plastic fixing frame hidden fixing screws | stainless steel |
|  | 38 804 000 38 804 SH0 38 804 P00 Nova Cosmopolitan Actuation plate manual activation for urinal set for final installation for Rapido U or Rapido UMB 116 x 144 mm mechanical functional cartridge flow pressure min 0.5 bar operating pressure max 6 bar 1.0 - 6.0 adjustable GROHE Long-Life finish | chrome alpine white matt chrome |
|  | 38 857 000 38 857 SH0 38 857 P00 Arena Cosmopolitan Actuation plate manual activation for urinal set for final installation for Rapido U or Rapido UMB 116 x 144 mm mechanical functional cartridge flow pressure min 0.5 bar operating pressure max 6 bar 1.0 - 6.0 adjustable GROHE Long-Life finish | chrome alpine white matt chrome |
|  | 38 808 000 38 808 SH0 38 808 P00 Surf Actuation plate manual activation for urinal set for final installation for Rapido U or Rapido UMB 116 x 144 mm mechanical functional cartridge flow pressure min 0.5 bar operating pressure max 6 bar 1.0 - 6.0 adjustable GROHE Long-Life finish | chrome alpine white matt chrome |

GROHE CONNECTION AND SECURITY TECHNOLOGY





CONTENTS


| | |
|----------------|-----|
| Angle valves | 488 |
| Safety systems | 490 |

GROHE ANGLE VALVES

| Ref. no. | Colour |
|--|--|
| 22 037 000 22 037 DCO 22 037 GLO 22 037 GN0 22 037 DAO 22 037 DL0 22 037 A00 22 037 AL0 | chrome supersteel cool sunrise brushed cool sunrise warm sunset brushed warm sunset hard graphite brushed hard graphite |
| Angle valve 1/2" pre-roughened connection thread for easy sealing wall connection 1/2" outlet thread 3/8" with length compensation with compression nut Ø 10mm water protected spindle shutoff, brass, with grease chamber and double o-ring sealing long connecting shaft ergonomic metal handle marking: neutral metal push-on escutcheon Ø 55 mm GROHE Long-Life finish | |
| 22 074 KF0 ditto, Professional exclusive | phantom black |
| 22 041 001 102342 243 0 | chrome matte black |
| Angle valve 1/2" pre-roughened connection thread for easy sealing wall connection 1/2" outlet 1/2" water protected spindle shutoff, brass, with grease chamber and double o-ring sealing long connecting shaft ergonomic metal handle marking: neutral metal push-on escutcheon Ø 55 mm GROHE Long-Life finish | |
| 22 018 000 | chrome |
| Angle valve 1/2" pre-roughened connection thread for easy sealing wall connection 1/2" outlet thread 3/8" with length compensation with compression nut Ø 10mm water protected spindle shutoff, brass, with grease chamber and double o-ring sealing ergonomic handle marking: neutral metal push-on escutcheon Ø 55 mm GROHE Long-Life finish | |
| 22 025 000 | chrome |
| Angle valve 1/2" pre-roughened connection thread for easy sealing wall connection 1/2" outlet 1/2" water protected spindle shutoff, brass, with grease chamber and double o-ring sealing ergonomic handle marking: neutral metal push-on escutcheon Ø 55 mm GROHE Long-Life finish | |
| 22 939 000 | chrome |
| Angle valve 1/2" connector set 3/8" for copper pipe Ø 10 mm TDL handles marking: neutral escutcheon GROHE Long-Life finish | |


GROHE ANGLE VALVES

Ref. no. Colour




22 940 000 chrome

Angle valve 1/2"
without connector set 1/2"
for copper pipe Ø 10 mm
TDL handles
marking: neutral
escutcheon
GROHE Long-Life finish



22 012 000 chrome
22 012 DC0
22 012 AL0 supersteel
brushed hard graphite

Eurocube
Angle valve 1/2"
wall connection 1/2"
outlet thread 3/8"
Cartridge headpart
metal handle
marking: neutral
metal push-on escutcheon




22 013 000 chrome

Eurocube
Angle valve 1/2"
wall connection 1/2"
outlet 1/2"
Cartridge headpart
metal handle
marking: neutral
metal push-on escutcheon

GROHE SAFETY SYSTEMS

Ref. no.

Colour



41 238 000

chrome

Vacuum breaker 1/2"

type HB

vertical installation

for intrinsic safety against backflow according to DIN 1988.100 and DIN EN 1717

GROHE Long-Life finish

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|--------------|------|--------------|----------|-------------|----------|-------------|------|-------------|------|
| 10 | | 102215 243 0 | 232 | 13 404 DC3 | 131 | 19 317 GL1 | 40 | 19 854 001 | 196 |
| 100961 000 0 | 83 | 102218 243 0 | 286 | 13 425 001 | 185, 189 | 19 317 GN1 | 40 | 19 855 001 | 196 |
| 100961 AL0 0 | 84 | 102251 243 0 | 209 | 13 448 003 | 173 | 19 334 001 | 44 | 19 895 000 | 122 |
| 100961 DAO 0 | 84 | 102256 243 0 | 208 | 13 448 2433 | 173 | 19 334 AL1 | 44 | 19 895 AL0 | 122 |
| 100961 GL0 0 | 84 | 102257 243 0 | 208 | 13 449 001 | 140 | 19 334 DA1 | 44 | 19 895 DC0 | 122 |
| 100961 KF0 0 | 84 | 102279 KF0 0 | 203 | 13 449 A01 | 140 | 19 334 DC1 | 44 | 19 897 001 | 124 |
| 100961 KF0 0 | 84 | 102342 243 0 | 488 | 13 449 AL1 | 140 | 19 334 DL1 | 44 | 19 897 AL1 | 124 |
| 100961 KI0 0 | 84 | 102460 243 0 | 210 | 13 449 DA1 | 140 | 19 334 GL1 | 44 | 19 897 DC1 | 124 |
| 100964 000 0 | 81 | 102461 243 0 | 208 | 13 449 DC1 | 140 | 19 334 GN1 | 44 | 19 910 000 | 125 |
| 100964 AL0 0 | 82 | 102465 243 0 | 212 | 13 449 DL1 | 140 | 19 345 001 | 147 | 19 952 000 | 198 |
| 100964 DAO 0 | 82 | 102466 243 0 | 207 | 13 449 GL1 | 140 | 19 346 001 | 147 | 19 952 2430 | 198 |
| 100964 GL0 0 | 82 | 102467 243 0 | 209 | 13 449 GN1 | 140 | 19 380 002 | 41 | 19 952 A00 | 198 |
| 100964 KF0 0 | 82 | 102468 243 0 | 212 | 13 471 001 | 180 | 19 380 AL2 | 41 | 19 952 AL0 | 198 |
| 100964 KI0 0 | 82 | 102469 243 0 | 212 | 13 484 000 | 67 | 19 380 DA2 | 41 | 19 952 DAO | 198 |
| 101458 SH0 0 | 419 | 102470 243 0 | 207 | 13 484 IG0 | 67 | 19 380 DC2 | 41 | 19 952 DC0 | 198 |
| 101672 999 0 | 84 | 102471 243 0 | 210 | 13 485 000 | 52 | 19 380 DL2 | 41 | 19 952 DL0 | 198 |
| 101673 000 0 | 85 | 102472 243 0 | 211 | 13 485 AL0 | 52 | 19 380 GL2 | 41 | 19 952 GL0 | 198 |
| 101673 AL0 0 | 85 | 102473 243 0 | 210 | 13 485 DC0 | 52 | 19 380 GN2 | 41 | 19 952 GN0 | 198 |
| 101673 DAO 0 | 85 | 102530 243 1 | 319 | 13 486 000 | 52 | 19 381 000 | 164 | 19 965 001 | 119 |
| 101673 GL0 0 | 85 | 103849 SH0 0 | 439 | 13 486 AL0 | 52 | 19 381 ALC | 164 | 19 976 001 | 139 |
| 101673 KF0 0 | 85 | 103860 SH0 0 | 439 | 13 486 DC0 | 52 | 19 381 GLC | 164 | 20 | |
| 101676 000 0 | 84 | 103993 999 0 | 249, 455 | 13 487 000 | 24 | 19 382 000 | 166 | 20 187 000 | 164 |
| 101676 AL0 0 | 85 | 103994 999 0 | 249, 455 | 13 487 AL0 | 24 | 19 383 000 | 166 | 20 188 001 | 38 |
| 101676 DAO 0 | 85 | 103999 999 0 | 249, 455 | 13 487 DAO | 24 | 19 386 002 | 39 | 20 188 AL1 | 38 |
| 101676 GL0 0 | 85 | 105334 000 0 | 161 | 13 487 DC0 | 24 | 19 386 AL2 | 39 | 20 188 DA1 | 38 |
| 101676 KF0 0 | 85 | 105334 243 0 | 161 | 13 487 DL0 | 24 | 19 386 DA2 | 39 | 20 188 DC1 | 38 |
| 101676 KI0 0 | 85 | 105335 000 0 | 161 | 13 487 GL0 | 24 | 19 386 DC2 | 39 | 20 188 DL1 | 38 |
| 101677 000 0 | 85 | 105335 243 0 | 161 | 13 487 GNO | 24 | 19 386 DL2 | 39 | 20 188 GL1 | 38 |
| 101677 AL0 0 | 85 | 105336 000 0 | 162 | 14 | | 19 386 GL2 | 39 | 20 188 GN1 | 38 |
| 101677 DAO 0 | 85 | 105336 243 0 | 162 | 14 047 000 | 278 | 19 409 001 | 116 | 20 189 002 | 38 |
| 101677 GL0 0 | 85 | 12 | | 14 048 000 | 248, 250 | 19 409 AL1 | 116 | 20 189 AL2 | 38 |
| 101677 KF0 0 | 85 | 12 435 000 | 328 | 14 056 000 | 248 | 19 409 DC1 | 116 | 20 189 DA2 | 38 |
| 101677 KI0 0 | 85 | 13 | | 14 057 000 | 248 | 19 446 002 | 42 | 20 189 DC2 | 38 |
| 101694 000 0 | 159 | 13 252 000 | 192, 194 | 14 058 000 | 248 | 19 446 AL2 | 42 | 20 189 DL2 | 38 |
| 101694 243 0 | 159 | 13 254 000 | 192, 194 | 14 077 XH0 | 101, 114 | 19 446 DA2 | 42 | 20 189 GL2 | 38 |
| 101699 000 0 | 159 | 13 255 001 | 185, 188 | 14 079 XH0 | 231, 261 | 19 446 DC2 | 42 | 20 189 GN2 | 38 |
| 101729 000 0 | 159 | 13 261 000 | 167 | 14 926 002 | 421 | 19 446 DL2 | 42 | 20 193 002 | 38 |
| 101729 243 0 | 159 | 13 258 000 | 191 | 19 | | 19 446 GL2 | 42 | 20 193 AL2 | 38 |
| 101749 000 0 | 159 | 13 261 000 | 167 | 19 025 000 | 198 | 19 446 GN2 | 42 | 20 193 DA2 | 38 |
| 101749 243 0 | 159 | 13 261 AL0 | 167 | 19 309 002 | 39 | 19 450 003 | 173 | 20 193 DC2 | 38 |
| 101755 000 0 | 159 | 13 261 GL0 | 167 | 19 309 AL2 | 39 | 19 450 2433 | 173 | 20 193 DL2 | 38 |
| 101755 243 0 | 159 | 13 262 000 | 167 | 19 309 DA2 | 39 | 19 451 003 | 173 | 20 193 GL2 | 38 |
| 101777 000 0 | 161 | 13 264 001 | 43 | 19 309 DC2 | 39 | 19 451 2433 | 173 | 20 193 GN2 | 38 |
| 101777 243 0 | 161 | 13 264 AL1 | 43 | 19 309 DL2 | 39 | 19 506 002 | 151 | 20 201 000 | 197 |
| 101778 000 0 | 161 | 13 264 DA1 | 43 | 19 309 GL2 | 39 | 19 506 003 | 157 | 20 202 000 | 197 |
| 101778 243 0 | 161 | 13 264 DC1 | 43 | 19 315 000 | 40 | 19 507 002 | 150 | 20 203 000 | 197 |
| 101810 000 0 | 159 | 13 264 DL1 | 43 | 19 315 GN2 | 39 | 19 507 003 | 157 | 20 205 000 | 197 |
| 101810 243 0 | 159 | 13 264 GL1 | 43 | 19 315 001 | 40 | 19 571 002 | 149 | 20 208 002 | 149 |
| 101813 000 0 | 160 | 13 264 GN1 | 43 | 19 315 AL1 | 40 | 19 571 003 | 154 | 20 216 001 | 145 |
| 101813 243 0 | 160 | 13 276 002 | 151 | 19 315 DA1 | 40 | 19 573 002 | 142 | 20 287 000 | 193 |
| 101814 000 0 | 160 | 13 277 002 | 152 | 19 315 DC1 | 40 | 19 575 001 | 145 | 20 288 000 | 192 |
| 101824 000 0 | 160 | 13 278 002 | 143 | 19 315 DL1 | 40 | 19 576 002 | 148 | 20 289 001 | 187 |
| 101824 243 0 | 160 | 13 279 002 | 143 | 19 315 GL1 | 40 | 19 577 001 | 119 | 20 296 001 | 135 |
| 101825 000 0 | 160 | 13 280 001 | 148 | 19 315 GN1 | 40 | 19 577 AL1 | 119 | 20 296 AL1 | 135 |
| 102165 243 0 | 372 | 13 281 001 | 148 | 19 316 001 | 42 | 19 577 DC1 | 119 | 20 296 DA1 | 135 |
| 102166 KF0 0 | 224 | 13 303 000 | 124 | 19 316 AL1 | 42 | 19 590 001 | 43 | 20 296 DC1 | 135 |
| 102167 KF0 0 | 225 | 13 303 AL0 | 124 | 19 316 DA1 | 42 | 19 590 AL1 | 43 | 20 296 DL1 | 135 |
| 102168 KF0 0 | 231 | 13 303 DC0 | 124 | 19 316 DC1 | 42 | 19 590 DA1 | 43 | 20 296 GL1 | 135 |
| 102169 KF0 0 | 231 | 13 304 000 | 125 | 19 316 DL1 | 42 | 19 590 DC1 | 43 | 20 296 GN1 | 135 |
| 102202 243 0 | 244 | 13 378 000 | 402, 411 | 19 316 GL1 | 42 | 19 590 DL1 | 43 | 20 301 003 | 128 |
| 102203 243 0 | 244 | 13 380 000 | 402, 411 | 19 316 GN1 | 42 | 19 590 GL1 | 43 | 20 304 001 | 116 |
| 102208 243 0 | 234 | 13 383 001 | 120 | 19 317 001 | 40 | 19 590 GN1 | 43 | 20 393 001 | 195 |
| 102209 243 0 | 232 | 13 383 DC1 | 120 | 19 317 AL1 | 40 | 19 806 001 | 196 | 20 404 001 | 195 |
| 102210 243 0 | 234 | 13 390 000 | 192, 194 | 19 317 DA1 | 40 | 19 807 001 | 196 | 20 421 001 | 182 |
| 102211 243 0 | 232 | 13 404 003 | 131 | 19 317 DC1 | 40 | 19 808 001 | 196 | 20 470 000 | 190 |
| 102212 243 0 | 234 | 13 404 AL3 | 131 | 19 317 DL1 | 40 | 19 809 001 | 196 | 20 474 001 | 183 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|------------|------|------------|------|------------|----------|-------------|--------|-------------|----------|
| 20 587 000 | 33 | 20 658 DA0 | 19 | 21 142 DC0 | 28 | 23 127 00E | 121 | 23 569 003 | 153 |
| 20 587 AL0 | 33 | 20 658 DC0 | 19 | 21 142 DL0 | 28 | 23 127 AL0 | 121 | 23 570 003 | 154 |
| 20 587 DAO | 33 | 20 658 DL0 | 19 | 21 142 GL0 | 28 | 23 127 DC0 | 121 | 23 570 LS3 | 154 |
| 20 587 DCO | 33 | 20 658 GL0 | 19 | 21 142 GN0 | 28 | 23 132 00E | 121 | 23 571 000 | 116, 117 |
| 20 587 DL0 | 33 | 20 658 GNO | 19 | 21 144 000 | 20 | 23 135 00E | 122 | 23 601 000 | 194 |
| 20 587 GL0 | 33 | 20 661 000 | 22 | 21 144 AL0 | 20 | 23 135 AL0 | 122 | 23 603 001 | 188 |
| 20 587 GNO | 33 | 20 661 AL0 | 22 | 21 144 DAO | 20 | 23 135 DC0 | 122 | 23 605 001 | 184 |
| 20 589 000 | 29 | 20 661 DAO | 22 | 21 144 DCO | 20 | 23 137 000 | 121 | 23 631 000 | 192 |
| 20 589 AL0 | 29 | 20 661 DC0 | 22 | 21 144 DL0 | 20 | 23 138 000 | 122 | 23 632 000 | 193 |
| 20 589 DAO | 29 | 20 661 DL0 | 22 | 21 144 GL0 | 20 | 23 140 000 | 123 | 23 634 001 | 188 |
| 20 589 DCO | 29 | 20 661 GL0 | 22 | 21 144 GNO | 20 | 23 140 AL0 | 123 | 23 636 001 | 183 |
| 20 589 DL0 | 29 | 20 661 GN0 | 22 | 21 145 000 | 20 | 23 140 DC0 | 123 | 23 672 001 | 124 |
| 20 589 GL0 | 29 | 20 662 000 | 21 | 21 145 AL0 | 20 | 23 141 000 | 123 | 23 672 AL1 | 124 |
| 20 589 GNO | 29 | 20 662 AL0 | 21 | 21 145 DAO | 20 | 23 145 000 | 123 | 23 672 DC1 | 124 |
| 20 593 000 | 34 | 20 662 DAO | 21 | 21 145 DCO | 20 | 23 145 AL0 | 123 | 23 707 003 | 153 |
| 20 593 AL0 | 34 | 20 662 DC0 | 21 | 21 145 DL0 | 20 | 23 145 DC0 | 123 | 23 718 003 | 154 |
| 20 593 DAO | 34 | 20 662 DL0 | 21 | 21 145 GL0 | 20 | 23 200 002 | 50 | 23 719 003 | 154 |
| 20 593 DCO | 34 | 20 662 GL0 | 21 | 21 145 GNO | 20 | 23 262 001 | 177 | 23 720 003 | 155 |
| 20 593 DL0 | 34 | 20 662 GN0 | 21 | 21 149 000 | 20 | 23 263 001 | 179 | 23 722 003 | 156 |
| 20 593 GL0 | 34 | 20 664 SD0 | 14 | 21 149 AL0 | 20 | 23 296 001 | 116 | 23 726 003 | 156 |
| 20 593 GNO | 34 | 20 665 SD0 | 14 | 21 149 DAO | 20 | 23 296 AL1 | 116 | 23 739 002 | 145 |
| 20 595 000 | 29 | 20 666 000 | 64 | 21 149 DCO | 20 | 23 296 DC1 | 116 | 23 751 000 | 193 |
| 20 595 AL0 | 29 | 20 666 IGO | 64 | 21 149 DL0 | 20 | 23 319 000 | 65 | 23 752 000 | 193 |
| 20 595 DAO | 29 | 20 667 000 | 58 | 21 149 GL0 | 20 | 23 322 003 | 169 | 23 753 000 | 193 |
| 20 595 DCO | 29 | 20 667 AL0 | 58 | 21 149 GNO | 20 | 23 322 2433 | 169 | 23 754 000 | 193 |
| 20 595 DL0 | 29 | 20 667 DC0 | 58 | 21 375 001 | 195 | 23 324 003 | 169 | 23 760 001 | 182 |
| 20 595 GL0 | 29 | 20 668 000 | 58 | 22 | | 23 324 2433 | 169 | 23 761 001 | 183 |
| 20 595 GNO | 29 | 20 668 AL0 | 58 | 21 | | 23 325 000 | 163 | 23 762 001 | 186 |
| 20 616 001 | 177 | 20 668 DC0 | 58 | 22 012 000 | 125, 489 | 23 325 ALC | 163 | 23 763 001 | 187 |
| 20 619 000 | 64 | 20 669 000 | 58 | 22 012 AL0 | 125, 489 | 23 325 GLC | 163 | 23 764 001 | 187 |
| 20 619 IGO | 64 | 20 669 AL0 | 58 | 22 012 DC0 | 125, 489 | 23 328 001 | 182 | 23 791 001 | 115 |
| 20 622 000 | 65 | 20 669 DC0 | 58 | 22 013 000 | 125, 489 | 23 330 001 | 182 | 23 791 AL1 | 115 |
| 20 622 IGO | 65 | 20 670 000 | 59 | 22 018 000 | 488 | 23 331 001 | 183 | 23 791 DC1 | 115 |
| 20 623 000 | 65 | 20 670 AL0 | 59 | 22 025 000 | 488 | 23 335 001 | 186 | 23 792 001 | 119 |
| 20 623 IGO | 65 | 20 670 DC0 | 59 | 22 037 000 | 488 | 23 337 001 | 186 | 23 792 AL1 | 119 |
| 20 624 000 | 64 | 20 671 000 | 59 | 22 037 A00 | 488 | 23 338 001 | 187 | 23 792 DC1 | 119 |
| 20 624 IGO | 64 | 20 671 AL0 | 59 | 22 037 AL0 | 488 | 23 393 243E | 169 | 23 843 003 | 127 |
| 20 626 000 | 50 | 20 671 DC0 | 59 | 22 037 DAO | 488 | 23 403 001 | 37 | 23 843 AL3 | 127 |
| 20 626 AL0 | 50 | 20 672 000 | 59 | 22 037 DCO | 488 | 23 403 AL1 | 37 | 23 843 DC3 | 127 |
| 20 626 DC0 | 50 | 20 672 AL0 | 59 | 22 037 DL0 | 488 | 23 403 DA1 | 37 | 23 844 003 | 128 |
| 20 627 000 | 49 | 20 672 DC0 | 59 | 22 037 GL0 | 488 | 23 403 DC1 | 37 | 23 846 003 | 131 |
| 20 627 AL0 | 49 | 21 | | 22 037 GNO | 488 | 23 403 DL1 | 37 | 23 846 AL3 | 131 |
| 20 627 DC0 | 49 | 21 | | 22 041 001 | 488 | 23 403 GL1 | 37 | 23 846 DC3 | 131 |
| 20 628 000 | 50 | 21 134 000 | 33 | 22 074 KF0 | 488 | 23 403 GN1 | 37 | 23 851 003 | 127 |
| 20 628 AL0 | 50 | 21 134 AL0 | 33 | 22 115 000 | 323 | 23 405 001 | 116 | 23 851 AL3 | 127 |
| 20 628 DCO | 50 | 21 134 DAO | 33 | 22 117 KF0 | 325 | 23 405 AL1 | 116 | 23 851 DC3 | 127 |
| 20 629 000 | 50 | 21 134 DC0 | 33 | 22 118 KF0 | 327 | 23 405 DC1 | 116 | 23 871 003 | 127 |
| 20 629 AL0 | 50 | 21 134 DL0 | 33 | 22 119 KF0 | 256 | 23 406 000 | 122 | 23 871 AL3 | 127 |
| 20 629 DCO | 50 | 21 134 GL0 | 33 | 22 120 KF0 | 259 | 23 406 AL0 | 122 | 23 871 DC3 | 127 |
| 20 634 SD0 | 14 | 21 134 GNO | 33 | 22 121 KF0 | 282 | 23 406 DC0 | 122 | 23 872 003 | 127 |
| 20 635 SD0 | 14 | 21 138 000 | 28 | 22 122 KF0 | 283 | 23 429 000 | 16, 39 | 23 877 001 | 186 |
| 20 643 000 | 21 | 21 138 AL0 | 28 | 22 123 KF0 | 281 | 23 432 000 | 142 | 23 878 001 | 186 |
| 20 643 AL0 | 21 | 21 138 DAO | 28 | 22 124 KF0 | 281 | 23 444 001 | 117 | 23 886 001 | 186 |
| 20 643 DAO | 21 | 21 138 DC0 | 28 | 22 125 KF0 | 300, 324 | 23 444 AL1 | 117 | 23 891 001 | 187 |
| 20 643 DCO | 21 | 21 138 DL0 | 28 | 22 126 KF0 | 305 | 23 444 DC1 | 117 | 23 894 001 | 182 |
| 20 643 DL0 | 21 | 21 138 GL0 | 28 | 22 127 KF0 | 294 | 23 445 000 | 121 | 23 895 001 | 182 |
| 20 643 GL0 | 21 | 21 138 GN0 | 28 | 22 939 000 | 488 | 23 445 AL0 | 121 | 23 911 001 | 183 |
| 20 643 GNO | 21 | 21 140 000 | 33 | 22 940 000 | 489 | 23 445 DC0 | 121 | 23 917 001 | 186 |
| 20 649 000 | 21 | 21 140 AL0 | 33 | 23 | | 23 446 000 | 121 | 23 920 001 | 145 |
| 20 649 AL0 | 21 | 21 140 DAO | 33 | 23 043 003 | 149 | 23 447 000 | 122 | 23 921 000 | 164 |
| 20 649 DAO | 21 | 21 140 DC0 | 33 | 23 048 003 | 151 | 23 447 AL0 | 122 | 23 922 003 | 168 |
| 20 649 DCO | 21 | 21 140 DL0 | 33 | 23 054 003 | 141 | 23 447 DC0 | 122 | 23 922 2433 | 168 |
| 20 649 DL0 | 21 | 21 140 GL0 | 33 | 23 106 001 | 115 | 23 448 002 | 141 | 23 923 003 | 169 |
| 20 649 GLO | 21 | 21 140 GNO | 33 | 23 106 AL1 | 115 | 23 449 002 | 141 | 23 925 000 | 163 |
| 20 649 GNO | 21 | 21 142 000 | 28 | 23 106 DC1 | 115 | 23 450 001 | 144 | 23 926 000 | 163 |
| 20 658 000 | 19 | 21 142 AL0 | 28 | 23 124 003 | 168 | 23 537 003 | 170 | 23 931 001 | 144 |
| 20 658 AL0 | 19 | 21 142 DAO | 28 | 23 | | 23 564 003 | 153 | 23 932 001 | 144 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|-------------|------|------------|------------|------------|------------|------------|------------|------------|------|
| 23 958 003 | 126 | 24 095 DC1 | 118 | 24 172 GN1 | 132 | 24 344 DC0 | 49 | 24 362 DL0 | 15 |
| 23 958 DC3 | 126 | 24 153 000 | 236, 238 | 24 172 KF1 | 132 | 24 345 000 | 49 | 24 362 GL0 | 15 |
| 23 959 003 | 126 | 24 153 AL0 | 236, 238 | 24 173 001 | 133 | 24 345 AL0 | 49 | 24 362 GNO | 15 |
| 23 970 003 | 170 | 24 153 DC0 | 236, 238 | 24 173 A01 | 133 | 24 345 DC0 | 49 | 24 363 000 | 15 |
| 23 971 003 | 170 | 24 154 000 | 236, 238 | 24 173 AL1 | 133 | 24 346 000 | 49 | 24 363 AL0 | 15 |
| 23 971 2433 | 170 | 24 154 AL0 | 236, 238 | 24 173 DA1 | 133 | 24 346 AL0 | 49 | 24 363 DAO | 15 |
| 23 975 003 | 169 | 24 154 DC0 | 236, 238 | 24 173 DC1 | 133 | 24 346 DC0 | 49 | 24 363 DCO | 15 |
| 23 975 2433 | 169 | 24 155 000 | 236, 239 | 24 173 DL1 | 133 | 24 347 000 | 51 | 24 363 DL0 | 15 |
| 23 976 003 | 170 | 24 155 AL0 | 236, 239 | 24 173 GL1 | 133 | 24 347 AL0 | 51 | 24 363 GLO | 15 |
| 23 980 003 | 174 | 24 155 DC0 | 236, 239 | 24 173 GN1 | 133 | 24 347 DC0 | 51 | 24 363 GNO | 15 |
| 23 981 003 | 174 | 24 160 001 | 39 | 24 174 001 | 134 | 24 348 000 | 52 | 24 364 000 | 16 |
| 23 982 003 | 175 | 24 160 AL1 | 39 | 24 174 A01 | 134 | 24 348 001 | 52 | 24 364 AL0 | 16 |
| 23 983 003 | 175 | 24 160 DA1 | 39 | 24 174 AL1 | 134 | 24 348 AL0 | 52 | 24 364 DAO | 16 |
| 23 988 003 | 174 | 24 160 DC1 | 39 | 24 174 DA1 | 134 | 24 348 DC0 | 52 | 24 364 DCO | 16 |
| 23 989 003 | 174 | 24 160 DL1 | 39 | 24 174 DC1 | 134 | 24 353 000 | 22 | 24 364 DL0 | 16 |
| 24 | | 24 160 GL1 | 39 | 24 174 DL1 | 134 | 24 353 AL0 | 22 | 24 364 GLO | 16 |
| 24 160 GN1 | | 39 | 24 174 GL1 | 134 | 24 353 DA0 | 22 | 24 364 GNO | 16 | |
| 24 042 003 | 172 | 24 167 001 | 138 | 24 174 GN1 | 134 | 24 353 DC0 | 22 | 24 365 000 | 15 |
| 24 043 003 | 172 | 24 167 A01 | 138 | 24 175 001 | 132 | 24 353 DL0 | 22 | 24 365 AL0 | 15 |
| 24 044 000 | 165 | 24 167 AL1 | 138 | 24 176 001 | 133 | 24 353 GL0 | 22 | 24 365 DAO | 15 |
| 24 045 000 | 166 | 24 167 DA1 | 138 | 24 176 KF1 | 133 | 24 353 GN0 | 22 | 24 365 DCO | 15 |
| 24 045 AL0 | 166 | 24 167 DC1 | 138 | 24 177 001 | 134 | 24 354 000 | 17 | 24 365 DL0 | 15 |
| 24 045 GL0 | 166 | 24 167 DL1 | 138 | 24 177 KF1 | 134 | 24 354 AL0 | 17 | 24 365 GL0 | 15 |
| 24 046 003 | 156 | 24 167 GL1 | 138 | 24 178 001 | 136 | 24 354 DA0 | 17 | 24 365 GNO | 15 |
| 24 047 003 | 157 | 24 167 GN1 | 138 | 24 178 A01 | 136 | 24 354 DC0 | 17 | 24 366 000 | 16 |
| 24 048 003 | 156 | 24 167 KF1 | 138 | 24 178 AL1 | 136 | 24 354 DL0 | 17 | 24 366 AL0 | 16 |
| 24 048 LS3 | 156 | 24 168 001 | 138 | 24 178 DA1 | 136 | 24 354 GL0 | 17 | 24 366 DAO | 16 |
| 24 049 003 | 157 | 24 168 A01 | 138 | 24 178 DC1 | 136 | 24 354 GN0 | 17 | 24 366 DCO | 16 |
| 24 049 LS3 | 157 | 24 168 AL1 | 138 | 24 178 DL1 | 136 | 24 355 000 | 17 | 24 366 DL0 | 16 |
| 24 051 002 | 150 | 24 168 DA1 | 138 | 24 178 GL1 | 136 | 24 355 AL0 | 17 | 24 366 GL0 | 16 |
| 24 052 002 | 150 | 24 168 DC1 | 138 | 24 178 GN1 | 136 | 24 355 DA0 | 17 | 24 366 GNO | 16 |
| 24 053 001 | 146 | 24 168 DL1 | 138 | 24 181 001 | 133 | 24 355 DC0 | 17 | 24 367 000 | 17 |
| 24 054 001 | 147 | 24 168 GL1 | 138 | 24 182 001 | 134 | 24 355 DL0 | 17 | 24 367 AL0 | 17 |
| 24 055 002 | 143 | 24 168 GN1 | 138 | 24 226 000 | 166 | 24 355 GL0 | 17 | 24 367 DAO | 17 |
| 24 056 002 | 143 | 24 168 KF1 | 138 | 24 256 001 | 177 | 24 355 GN0 | 17 | 24 367 DCO | 17 |
| 24 059 003 | 130 | 24 169 001 | 138 | 24 257 001 | 177 | 24 356 000 | 18 | 24 367 DL0 | 17 |
| 24 059 AL3 | 130 | 24 169 A01 | 138 | 24 258 001 | 178 | 24 356 AL0 | 18 | 24 367 GLO | 17 |
| 24 059 DC3 | 130 | 24 169 AL1 | 138 | 24 259 000 | 66 | 24 356 DAO | 18 | 24 367 GNO | 17 |
| 24 060 003 | 130 | 24 169 DA1 | 138 | 24 259 IG0 | 66 | 24 356 DC0 | 18 | 24 368 000 | 19 |
| 24 060 AL3 | 130 | 24 169 DC1 | 138 | 24 260 000 | 66 | 24 356 DL0 | 18 | 24 368 AL0 | 19 |
| 24 060 DC3 | 130 | 24 169 DL1 | 138 | 24 260 IG0 | 66 | 24 356 GL0 | 18 | 24 368 DAO | 19 |
| 24 061 000 | 123 | 24 169 GL1 | 138 | 24 265 001 | 178 | 24 356 GN0 | 18 | 24 368 DCO | 19 |
| 24 061 AL0 | 123 | 24 169 GN1 | 138 | 24 266 001 | 178 | 24 357 000 | 18 | 24 368 DL0 | 19 |
| 24 061 DC0 | 123 | 24 170 001 | 135 | 24 267 001 | 178 | 24 357 AL0 | 18 | 24 368 GL0 | 19 |
| 24 062 000 | 123 | 24 170 A01 | 135 | 24 268 001 | 178 | 24 357 DA0 | 18 | 24 368 GNO | 19 |
| 24 062 AL0 | 123 | 24 170 AL1 | 135 | 24 269 001 | 179 | 24 357 DC0 | 18 | 24 369 000 | 64 |
| 24 062 DC0 | 123 | 24 170 DA1 | 135 | 24 272 001 | 179 | 24 357 DL0 | 18 | 24 369 IG0 | 64 |
| 24 063 001 | 118 | 24 170 DC1 | 135 | 24 273 001 | 179 | 24 357 GL0 | 18 | 24 370 000 | 64 |
| 24 063 AL1 | 118 | 24 170 DL1 | 135 | 24 274 001 | 179 | 24 357 GN0 | 18 | 24 370 IG0 | 64 |
| 24 063 DC1 | 118 | 24 170 GL1 | 135 | 24 277 000 | 51 | 24 358 000 | 18 | 24 371 000 | 64 |
| 24 064 001 | 118 | 24 170 GN1 | 135 | 24 277 AL0 | 51 | 24 358 AL0 | 18 | 24 371 IG0 | 64 |
| 24 064 AL1 | 118 | 24 170 KF1 | 135 | 24 277 DC0 | 51 | 24 358 DA0 | 18 | 24 372 000 | 65 |
| 24 064 DC1 | 118 | 24 171 001 | 132 | 24 278 001 | 180 | 24 358 DC0 | 18 | 24 372 IG0 | 65 |
| 24 075 000 | 234 | 24 171 A01 | 132 | 24 279 000 | 51 | 24 358 DL0 | 18 | 24 373 000 | 65 |
| 24 076 000 | 234 | 24 171 AL1 | 132 | 24 279 AL0 | 51 | 24 358 GL0 | 18 | 24 373 IG0 | 65 |
| 24 077 000 | 234 | 24 171 DA1 | 132 | 24 279 DC0 | 51 | 24 358 GN0 | 18 | 24 374 000 | 66 |
| 24 078 000 | 232 | 24 171 DC1 | 132 | 24 340 000 | 51 | 24 359 000 | 19 | 24 374 IG0 | 66 |
| 24 079 000 | 232 | 24 171 DL1 | 132 | 24 340 AL0 | 51 | 24 359 AL0 | 19 | 24 375 000 | 67 |
| 24 080 000 | 232 | 24 171 GL1 | 132 | 24 340 DC0 | 51 | 24 359 DA0 | 19 | 24 375 IG0 | 67 |
| 24 093 003 | 130 | 24 171 GN1 | 132 | 24 341 000 | 49 | 24 359 DC0 | 19 | 24 395 KF1 | 136 |
| 24 093 AL3 | 130 | 24 172 001 | 132 | 24 341 AL0 | 49 | 24 359 DL0 | 19 | 24 396 000 | 32 |
| 24 093 DC3 | 130 | 24 172 A01 | 132 | 24 341 DC0 | 49 | 24 359 GL0 | 19 | 24 396 AL0 | 32 |
| 24 094 000 | 124 | 24 172 AL1 | 132 | 24 342 000 | 49 | 24 359 GN0 | 19 | 24 396 DA0 | 32 |
| 24 094 AL0 | 124 | 24 172 DA1 | 132 | 24 342 AL0 | 49 | 24 362 000 | 15 | 24 396 DCO | 32 |
| 24 094 DC0 | 124 | 24 172 DC1 | 132 | 24 342 DC0 | 49 | 24 362 AL0 | 15 | 24 396 DL0 | 32 |
| 24 095 001 | 118 | 24 172 DL1 | 132 | 24 344 000 | 49 | 24 362 DA0 | 15 | 24 396 GLO | 32 |
| 24 095 AL1 | 118 | 24 172 GL1 | 132 | 24 344 AL0 | 49 | 24 362 DC0 | 15 | 24 396 GNO | 32 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|------------|------|------------|------|-------------|----------|-------------|----------|------------|------|
| 24 397 000 | 56 | 25 224 GNO | 36 | 25 268 DL0 | 23 | 26 335 001 | 322 | 26 481 AL0 | 282 |
| 24 397 AL0 | 56 | 25 226 000 | 31 | 25 268 GL0 | 23 | 26 346 001 | 322 | 26 481 DAO | 282 |
| 24 397 DC0 | 56 | 25 226 AL0 | 31 | 25 268 GNO | 23 | 26 352 000 | 319 | 26 481 DCO | 282 |
| 24 398 000 | 56 | 25 226 DAO | 31 | 25 272 000 | 23 | 26 353 000 | 319 | 26 481 DL0 | 282 |
| 24 398 AL0 | 56 | 25 226 DC0 | 31 | 25 272 AL0 | 23 | 26 354 000 | 320 | 26 481 GL0 | 282 |
| 24 398 DC0 | 56 | 25 226 DL0 | 31 | 25 272 DAO | 23 | 26 356 IL0 | 320 | 26 481 GNO | 282 |
| 24 399 000 | 56 | 25 226 GL0 | 31 | 25 272 DCO | 23 | 26 357 000 | 320 | 26 481 LS0 | 282 |
| 24 399 AL0 | 56 | 25 226 GNO | 31 | 25 272 DL0 | 23 | 26 358 000 | 320 | 26 483 000 | 282 |
| 24 399 DC0 | 56 | 25 227 000 | 34 | 25 272 GL0 | 23 | 26 361 000 | 254 | 26 484 000 | 282 |
| 24 400 000 | 56 | 25 227 AL0 | 34 | 25 272 GNO | 23 | 26 362 LN1 | 264, 279 | 26 496 000 | 279 |
| 24 400 AL0 | 56 | 25 227 DAO | 34 | 25 288 000 | 172 | 26 370 000 | 94, 328 | 26 507 000 | 259 |
| 24 400 DCO | 56 | 25 227 DC0 | 34 | 25 290 000 | 184 | 26 370 A00 | 94, 328 | 26 507 A00 | 259 |
| 24 408 000 | 57 | 25 227 DL0 | 34 | 25 291 000 | 184 | 26 370 AL0 | 94, 328 | 26 507 AL0 | 259 |
| 24 408 AL0 | 57 | 25 227 GL0 | 34 | 25 450 001 | 195 | 26 370 DA0 | 94, 328 | 26 507 DAO | 259 |
| 24 408 DC0 | 57 | 25 227 GNO | 34 | 25 452 001 | 196 | 26 370 DC0 | 94, 328 | 26 507 DCO | 259 |
| 24 414 000 | 57 | 25 229 000 | 29 | 26 | | 26 370 DL0 | 94, 328 | 26 507 DL0 | 259 |
| 24 414 AL0 | 57 | 25 229 AL0 | 29 | 26 | | 26 370 GL0 | 94, 328 | 26 507 GL0 | 259 |
| 24 414 DC0 | 57 | 25 229 DAO | 29 | 26 010 001 | 196 | 26 370 GNO | 94, 328 | 26 507 GNO | 259 |
| 24 417 000 | 57 | 25 229 DC0 | 29 | 26 030 000 | 280 | 26 385 000 | 255, 279 | 26 507 LS0 | 259 |
| 24 417 AL0 | 57 | 25 229 DL0 | 29 | 26 066 000 | 284 | 26 404 000 | 305 | 26 508 000 | 259 |
| 24 417 DC0 | 57 | 25 229 GL0 | 29 | 26 066 A00 | 284 | 26 405 000 | 306 | 26 508 A00 | 259 |
| 24 418 000 | 57 | 25 229 GNO | 29 | 26 066 AL0 | 284 | 26 406 003 | 313 | 26 508 AL0 | 259 |
| 24 418 AL0 | 57 | 25 241 003 | 175 | 26 066 DAO | 284 | 26 406 2433 | 313 | 26 508 DAO | 259 |
| 24 418 DC0 | 57 | 25 242 003 | 175 | 26 066 DCO | 284 | 26 409 000 | 291 | 26 508 DCO | 259 |
| 24 419 000 | 58 | 25 243 003 | 175 | 26 066 DL0 | 284 | 26 410 000 | 291 | 26 508 DL0 | 259 |
| 24 419 AL0 | 58 | 25 244 003 | 176 | 26 066 GL0 | 284 | 26 412 000 | 286 | 26 508 GL0 | 259 |
| 24 419 DC0 | 58 | 25 248 001 | 140 | 26 066 GNO | 284 | 26 443 000 | 255 | 26 508 GNO | 259 |
| 24 422 000 | 62 | 25 248 A01 | 140 | 26 067 000 | 284 | 26 443 LS0 | 255 | 26 508 LS0 | 259 |
| 24 422 AL0 | 62 | 25 248 AL1 | 140 | 26 067 A00 | 284 | 26 449 000 | 255 | 26 509 000 | 260 |
| 24 422 DC0 | 62 | 25 248 DA1 | 140 | 26 067 AL0 | 284 | 26 452 002 | 271 | 26 510 000 | 261 |
| 24 423 000 | 62 | 25 248 DC1 | 140 | 26 067 DAO | 284 | 26 456 000 | 290 | 26 513 000 | 301 |
| 24 423 AL0 | 62 | 25 248 DL1 | 140 | 26 067 DCO | 284 | 26 457 000 | 290 | 26 545 000 | 294 |
| 24 423 DC0 | 62 | 25 248 GL1 | 140 | 26 067 DL0 | 284 | 26 459 000 | 284 | 26 545 A00 | 294 |
| 24 424 000 | 63 | 25 248 GN1 | 140 | 26 067 GL0 | 284 | 26 461 000 | 284 | 26 545 GNO | 294 |
| 24 424 AL0 | 63 | 25 248 KF1 | 140 | 26 067 GNO | 284 | 26 464 000 | 280 | 26 547 000 | 294 |
| 24 424 DC0 | 63 | 25 249 001 | 137 | 26 073 000 | 285, 307 | 26 466 000 | 305 | 26 548 000 | 295 |
| 24 425 000 | 60 | 25 250 001 | 137 | 26 075 001 | 262 | 26 468 000 | 290 | 26 552 000 | 296 |
| 24 425 AL0 | 60 | 25 250 A01 | 137 | 26 075 A00 | 262 | 26 472 000 | 289 | 26 554 LS0 | 298 |
| 24 425 DC0 | 60 | 25 250 AL1 | 137 | 26 075 AL0 | 262 | 26 475 000 | 281 | 26 558 000 | 282 |
| 24 426 000 | 60 | 25 250 DA1 | 137 | 26 075 DAO | 262 | 26 475 A00 | 281 | 26 558 A00 | 282 |
| 24 426 AL0 | 60 | 25 250 DC1 | 137 | 26 075 DCO | 262 | 26 475 AL0 | 281 | 26 558 AL0 | 282 |
| 24 426 DC0 | 60 | 25 250 DL1 | 137 | 26 075 DL0 | 262 | 26 475 DAO | 281 | 26 558 DAO | 282 |
| 24 427 000 | 61 | 25 250 GL1 | 137 | 26 075 GL0 | 262 | 26 475 DC0 | 281 | 26 558 DC0 | 282 |
| 24 427 AL0 | 61 | 25 250 GN1 | 137 | 26 075 GNO | 262 | 26 475 DL0 | 281 | 26 558 DL0 | 282 |
| 24 427 DC0 | 61 | 25 250 KF1 | 137 | 26 087 000 | 265 | 26 475 GL0 | 281 | 26 558 GL0 | 282 |
| 25 | | 25 251 001 | 139 | 26 088 001 | 287 | 26 475 GN0 | 281 | 26 558 GNO | 282 |
| | | 25 251 A01 | 139 | 26 145 000 | 292 | 26 475 LS0 | 281 | 26 560 000 | 283 |
| 25 221 001 | 42 | 25 251 AL1 | 139 | 26 146 000 | 292 | 26 477 000 | 281 | 26 560 A00 | 283 |
| 25 221 AL1 | 42 | 25 251 DA1 | 139 | 26 161 003 | 308 | 26 477 A00 | 281 | 26 560 AL0 | 283 |
| 25 221 DA1 | 42 | 25 251 DC1 | 139 | 26 161 2433 | 308 | 26 477 AL0 | 281 | 26 560 DAO | 283 |
| 25 221 DC1 | 42 | 25 251 DL1 | 139 | 26 162 003 | 310 | 26 477 DAO | 281 | 26 560 DCO | 283 |
| 25 221 DL1 | 42 | 25 251 GL1 | 139 | 26 162 2433 | 310 | 26 477 DC0 | 281 | 26 560 DL0 | 283 |
| 25 221 GL1 | 42 | 25 251 GN1 | 139 | 26 163 003 | 311 | 26 477 DL0 | 281 | 26 560 GL0 | 283 |
| 25 221 GN1 | 42 | 25 251 KF1 | 139 | 26 163 2433 | 311 | 26 477 GL0 | 281 | 26 560 GNO | 283 |
| 25 222 001 | 43 | 25 252 001 | 137 | 26 164 003 | 313 | 26 477 GN0 | 281 | 26 562 000 | 288 |
| 25 222 AL1 | 43 | 25 252 A01 | 137 | 26 164 2433 | 313 | 26 477 LS0 | 281 | 26 564 000 | 283 |
| 25 222 DA1 | 43 | 25 252 AL1 | 137 | 26 244 002 | 268 | 26 479 000 | 282 | 26 564 A00 | 283 |
| 25 222 DC1 | 43 | 25 252 DA1 | 137 | 26 250 000 | 254 | 26 479 A00 | 282 | 26 564 AL0 | 283 |
| 25 222 DL1 | 43 | 25 252 DC1 | 137 | 26 250 LSO | 254 | 26 479 AL0 | 282 | 26 564 DAO | 283 |
| 25 222 GL1 | 43 | 25 252 DL1 | 137 | 26 254 000 | 281 | 26 479 DAO | 282 | 26 564 DCO | 283 |
| 25 222 GN1 | 43 | 25 252 GL1 | 137 | 26 254 LSO | 281 | 26 479 DC0 | 282 | 26 564 DL0 | 283 |
| 25 222 000 | 36 | 25 252 GN1 | 137 | 26 256 000 | 283 | 26 479 DL0 | 282 | 26 564 GL0 | 283 |
| 25 222 AL0 | 36 | 25 252 KF1 | 137 | 26 264 001 | 255, 281 | 26 479 GL0 | 282 | 26 564 GNO | 283 |
| 25 222 DAO | 36 | 25 268 000 | 23 | 26 267 001 | 287 | 26 479 GNO | 282 | 26 565 000 | 283 |
| 25 222 DCO | 36 | 25 268 AL0 | 23 | 26 305 002 | 269 | 26 479 LS0 | 282 | 26 566 000 | 283 |
| 25 222 DL0 | 36 | 25 268 DAO | 23 | 26 330 001 | 195 | 26 481 000 | 282 | 26 566 A00 | 283 |
| 25 222 GL0 | 36 | 25 268 DC0 | 23 | 26 334 001 | 322 | 26 481 A00 | 282 | 26 566 AL0 | 283 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|------------|---------|-------------|---------|-------------|--------|-------------|----------|-------------|----------|
| 26 566 DAO | 283 | 26 658 AL0 | 94, 327 | 26 802 000 | 91 | 26 897 000 | 69 | 27 075 GNO | 95, 326 |
| 26 566 DC0 | 283 | 26 658 DAO | 94, 327 | 26 802 A00 | 91 | 26 897 IGO | 69 | 27 076 000 | 95, 327 |
| 26 566 DL0 | 283 | 26 658 DC0 | 94, 327 | 26 802 AL0 | 91 | 26 898 000 | 68 | 27 076 A00 | 95, 327 |
| 26 566 GL0 | 283 | 26 658 DL0 | 94, 327 | 26 802 DCO | 91 | 26 898 IGO | 68 | 27 076 AL0 | 95, 327 |
| 26 566 GNO | 283 | 26 658 GL0 | 94, 327 | 26 802 DL0 | 91 | 26 899 000 | 68, 95 | 27 076 DAO | 95, 327 |
| 26 568 000 | 288 | 26 658 GNO | 94, 327 | 26 802 GNO | 91 | 26 900 000 | 69, 95 | 27 076 DCO | 95, 327 |
| 26 568 LSO | 288 | 26 659 000 | 94, 328 | 26 811 001 | 266 | 26 900 IGO | 69, 95 | 27 076 DL0 | 95, 327 |
| 26 569 000 | 288 | 26 659 A00 | 94, 328 | 26 828 000 | 79 | 26 901 000 | 68 | 27 076 GL0 | 95, 327 |
| 26 570 000 | 288 | 26 659 AL0 | 94, 328 | 26 837 A00 | 256 | 26 901 IGO | 68 | 27 076 GNO | 95, 327 |
| 26 574 000 | 294 | 26 659 DAO | 94, 328 | 26 837 AL0 | 256 | 26 902 003 | 314 | 27 137 001 | 322 |
| 26 574 A00 | 294 | 26 659 DC0 | 94, 328 | 26 837 DAO | 256 | 26 902 2433 | 314 | 27 180 000 | 279 |
| 26 574 AL0 | 294 | 26 659 DL0 | 94, 328 | 26 837 DCO | 256 | 26 904 003 | 316 | 27 206 000 | 328 |
| 26 574 DAO | 294 | 26 659 GL0 | 94, 328 | 26 837 DL0 | 256 | 26 905 003 | 316 | 27 222 000 | 301 |
| 26 574 DCO | 294 | 26 659 GNO | 94, 328 | 26 837 GL0 | 256 | 26 907 003 | 315 | 27 225 001 | 303 |
| 26 574 DL0 | 294 | 26 662 000 | 291 | 26 837 GNO | 256 | 26 908 003 | 316 | 27 226 001 | 302 |
| 26 574 GL0 | 294 | 26 663 000 | 285 | 26 847 000 | 93, 96 | 26 908 2433 | 316 | 27 226 AL1 | 302 |
| 26 574 GNO | 294 | 26 664 000 | 285 | 26 850 000 | 93, 96 | 26 909 003 | 316 | 27 227 001 | 302 |
| 26 574 LSO | 294 | 26 666 000 | 291 | 26 852 000 | 68 | 26 910 003 | 317 | 27 232 001 | 302 |
| 26 575 000 | 294 | 26 668 000 | 285 | 26 852 IGO | 68 | 26 914 003 | 308 | 27 238 000 | 301 |
| 26 577 LSO | 295 | 26 668 2430 | 285 | 26 853 000 | 68 | 26 915 003 | 310 | 27 239 001 | 301 |
| 26 579 LSO | 295 | 26 669 000 | 285 | 26 853 IGO | 68 | 26 915 2433 | 310 | 27 265 00E | 301 |
| 26 580 000 | 296 | 26 669 2430 | 285 | 26 855 000 | 89 | 26 917 003 | 309 | 27 266 00E | 302 |
| 26 580 LSO | 296 | 26 670 001 | 266 | 26 858 000 | 90 | 26 918 003 | 309 | 27 267 001 | 303 |
| 26 581 000 | 295 | 26 670 2431 | 266 | 26 859 000 | 90 | 26 919 003 | 309 | 27 354 000 | 303 |
| 26 581 LSO | 295 | 26 672 001 | 267 | 26 860 000 | 89 | 26 920 003 | 312 | 27 355 000 | 303 |
| 26 582 000 | 296 | 26 672 2431 | 267 | 26 862 000 | 89 | 26 921 003 | 313 | 27 368 000 | 305 |
| 26 582 A00 | 296 | 26 673 001 | 268 | 26 863 000 | 76 | 26 971 001 | 318, 325 | 27 369 000 | 305 |
| 26 582 AL0 | 296 | 26 674 001 | 269 | 26 864 000 | 77 | 26 975 001 | 274 | 27 389 003 | 272 |
| 26 582 DAO | 296 | 26 675 001 | 270 | 26 865 000 | 76 | 26 976 001 | 276 | 27 400 000 | 305 |
| 26 582 DCO | 296 | 26 681 000 | 291 | 26 866 000 | 92 | 26 976 2431 | 276 | 27 406 000 | 293 |
| 26 582 DL0 | 296 | 26 682 000 | 286 | 26 866 2430 | 92 | 26 977 001 | 276 | 27 421 002 | 265 |
| 26 582 GL0 | 296 | 26 683 000 | 286 | 26 866 A00 | 92 | 26 977 2431 | 276 | 27 470 000 | 288 |
| 26 582 GNO | 296 | 26 685 000 | 291 | 26 866 AL0 | 92 | 26 978 001 | 267 | 27 473 002 | 264 |
| 26 582 LSO | 296 | 26 687 000 | 286 | 26 866 DAO | 92 | 26 979 001 | 270 | 27 475 002 | 264 |
| 26 584 000 | 296 | 26 687 2430 | 286 | 26 866 DCO | 92 | 26 979 2431 | 270 | 27 478 000 | 289 |
| 26 584 LSO | 297 | 26 688 000 | 286 | 26 866 DL0 | 92 | 26 980 001 | 271 | 27 484 000 | 293 |
| 26 585 000 | 296 | 26 688 2430 | 286 | 26 866 GL0 | 92 | 26 980 2431 | 271 | 27 485 000 | 293 |
| 26 587 000 | 297 | 26 689 001 | 273 | 26 866 GNO | 92 | 26 981 001 | 272 | 27 488 000 | 292 |
| 26 587 LSO | 297 | 26 689 2431 | 273 | 26 868 000 | 90 | | | 27 492 000 | 290 |
| 26 588 000 | 298 | 26 691 001 | 273 | 26 872 000 | 89 | | | 27 499 000 | 304, 324 |
| 26 588 LSO | 298 | 26 691 2431 | 273 | 26 873 000 | 87 | 27 055 000 | 325 | 27 500 000 | 304, 324 |
| 26 589 000 | 297 | 26 692 001 | 274 | 26 874 000 | 88 | 27 056 000 | 325 | 27 512 001 | 319 |
| 26 589 LSO | 298 | 26 693 001 | 275 | 26 877 000 | 90 | 27 057 000 | 95, 327 | 27 513 001 | 319 |
| 26 590 000 | 298 | 26 694 001 | 275 | 26 878 000 | 98 | 27 057 A00 | 95, 327 | 27 513 A01 | 319 |
| 26 592 000 | 299 | 26 723 000 | 263 | 26 879 000 | 97 | 27 057 AL0 | 95, 327 | 27 513 AL1 | 319 |
| 26 592 LSO | 299 | 26 731 000 | 86 | 26 880 000 | 97 | 27 057 DA0 | 95, 327 | 27 513 DA1 | 319 |
| 26 594 000 | 299 | 26 733 000 | 86 | 26 881 000 | 89 | 27 057 DCO | 95, 327 | 27 513 DC1 | 319 |
| 26 594 LSO | 299 | 26 734 000 | 86 | 26 883 000 | 88 | 27 057 DL0 | 95, 327 | 27 513 DL1 | 319 |
| 26 602 000 | 324 | 26 735 000 | 86 | 26 885 000 | 92 | 27 057 GL0 | 95, 327 | 27 513 GL1 | 319 |
| 26 603 000 | 324 | 26 737 000 | 86 | 26 885 DAO | 92 | 27 057 GN0 | 95, 327 | 27 513 GN1 | 319 |
| 26 603 A00 | 324 | 26 739 000 | 86, 87 | 26 885 GL0 | 92 | 27 058 000 | 258 | 27 514 001 | 320 |
| 26 603 AL0 | 324 | 26 746 003 | 314 | 26 886 000 | 93 | 27 062 000 | 290 | 27 523 001 | 317, 324 |
| 26 603 DAO | 324 | 26 746 2433 | 314 | 26 887 000 | 89 | 27 074 000 | 94, 325 | 27 523 2431 | 317, 324 |
| 26 603 DCO | 324 | 26 748 003 | 315 | 26 888 000 | 87 | 27 074 A00 | 94, 325 | 27 524 001 | 318, 324 |
| 26 603 DL0 | 324 | 26 748 2433 | 315 | 26 890 000 | 89 | 27 074 AL0 | 94, 325 | 27 524 2431 | 318, 324 |
| 26 603 GL0 | 324 | 26 771 003 | 310 | 26 892 000 | 92 | 27 074 DAO | 94, 325 | 27 541 001 | 291 |
| 26 603 GNO | 324 | 26 784 000 | 87 | 26 893 000 | 92 | 27 074 DCO | 94, 325 | 27 571 30E | 314 |
| 26 604 000 | 300 | 26 785 000 | 87 | 26 894 000 | 92 | 27 074 DL0 | 94, 325 | 27 574 003 | 314 |
| 26 608 000 | 260 | 26 786 000 | 87 | 26 895 000 | 22 | 27 074 GL0 | 94, 325 | 27 576 003 | 314 |
| 26 634 000 | 307 | 26 801 000 | 91 | 26 895 AL0 | 22 | 27 074 GN0 | 94, 325 | 27 578 30E | 315 |
| 26 638 003 | 309 | 26 801 A00 | 91 | 26 895 DAO | 22 | 27 075 000 | 95, 326 | 27 579 003 | 315 |
| 26 639 003 | 312 | 26 801 AL0 | 91 | 26 895 DCO | 22 | 27 075 A00 | 95, 326 | 27 584 003 | 317 |
| 26 648 000 | 256 | 26 801 DAO | 91 | 26 895 DL0 | 22 | 27 075 AL0 | 95, 326 | 27 588 003 | 317 |
| 26 652 000 | 256 | 26 801 DCO | 91 | 26 895 GL0 | 22 | 27 075 DAO | 95, 326 | 27 595 001 | 325 |
| 26 657 000 | 257 | 26 801 DL0 | 91 | 26 895 GNO | 22 | 27 075 DC0 | 95, 326 | 27 595 2431 | 325 |
| 26 658 000 | 94, 327 | 26 801 GL0 | 91 | 26 896 000 | 69 | 27 075 DL0 | 95, 326 | 27 596 000 | 329 |
| 26 658 A00 | 94, 327 | 26 801 GNO | 91 | 26 896 IGO | 69 | 27 075 GL0 | 95, 326 | 27 597 30E | 308 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|------------|----------|-------------|----------|------------|----------|-------------|------|------------|------|
| 27 598 30E | 310 | 28 410 002 | 322 | 29 121 DL0 | 101, 228 | 29 192 001 | 135 | 29 407 AL0 | 24 |
| 27 600 003 | 309 | 28 413 002 | 322 | 29 121 GL0 | 101, 228 | 29 192 A01 | 135 | 29 407 DAO | 24 |
| 27 601 003 | 311 | 28 417 001 | 321 | 29 121 GN0 | 228 | 29 192 AL1 | 135 | 29 407 DLO | 24 |
| 27 601 30E | 311 | 28 419 003 | 308 | 29 122 000 | 101, 228 | 29 192 DA1 | 135 | 29 407 GL0 | 24 |
| 27 615 002 | 263 | 28 497 000 | 293 | 29 122 A00 | 101, 228 | 29 192 DC1 | 135 | 29 407 GN0 | 24 |
| 27 618 000 | 97 | 28 576 000 | 292 | 29 122 AL0 | 101, 228 | 29 192 DL1 | 135 | 29 408 000 | 24 |
| 27 619 000 | 97 | 28 605 001 | 326 | 29 122 DAO | 101, 228 | 29 192 GL1 | 135 | 29 408 AL0 | 24 |
| 27 644 003 | 309 | 28 628 001 | 328 | 29 122 DC0 | 101, 228 | 29 192 GN1 | 135 | 29 408 DAO | 24 |
| 27 646 30E | 311 | 28 628 2431 | 328 | 29 122 DL0 | 101, 228 | 29 192 KF1 | 135 | 29 408 DC0 | 24 |
| 27 693 000 | 326 | 28 671 001 | 326 | 29 122 GL0 | 101, 228 | 29 193 001 | 136 | 29 408 DLO | 24 |
| 27 699 000 | 306 | 28 724 000 | 293 | 29 122 GN0 | 228 | 29 193 A01 | 136 | 29 408 GL0 | 24 |
| 27 700 000 | 306 | 28 724 LS0 | 293 | 29 123 000 | 98, 224 | 29 193 AL1 | 136 | 29 408 GN0 | 24 |
| 27 703 000 | 306 | 28 778 000 | 289 | 29 123 A00 | 98, 224 | 29 193 DA1 | 136 | 29 410 000 | 16 |
| 27 704 000 | 327 | 28 939 000 | 198 | 29 123 AL0 | 98, 224 | 29 193 DC1 | 136 | 29 410 AL0 | 16 |
| 27 705 000 | 290 | 28 982 000 | 292 | 29 123 DC0 | 98, 224 | 29 193 DL1 | 136 | 29 410 DAO | 16 |
| 27 709 000 | 90, 292 | 28 990 000 | 198 | 29 123 DL0 | 98, 224 | 29 193 GL1 | 136 | 29 410 DCO | 16 |
| 27 711 000 | 90, 293 | 28 990 A00 | 198 | 29 123 GN0 | 98, 224 | 29 193 GN1 | 136 | 29 410 DL0 | 16 |
| 27 799 30E | 313 | 28 990 AL0 | 198 | 29 124 000 | 98, 224 | 29 193 KF1 | 136 | 29 410 GL0 | 16 |
| 27 803 30E | 312 | 28 990 DAO | 198 | 29 124 A00 | 98, 224 | 29 197 000 | 136 | 29 410 GN0 | 16 |
| 27 812 IL1 | 320 | 28 990 DC0 | 198 | 29 124 AL0 | 98, 224 | 29 303 003 | 128 | 29 412 000 | 78 |
| 27 814 001 | 289 | 28 990 DL0 | 198 | 29 124 DAO | 98, 224 | 29 303 AL3 | 128 | 29 413 000 | 78 |
| 27 841 000 | 324 | 28 990 GL0 | 198 | 29 124 DC0 | 98, 224 | 29 303 DC3 | 128 | 29 414 000 | 79 |
| 27 845 000 | 307, 329 | 28 990 GN0 | 198 | 29 124 DL0 | 98, 224 | 29 306 003 | 128 | 29 415 000 | 67 |
| 27 869 001 | 287 | 28 991 000 | 198 | 29 124 GL0 | 98, 224 | 29 307 003 | 130 | 29 415 IG0 | 67 |
| 27 870 001 | 286 | | | 29 124 GN0 | 98, 224 | 29 307 AL3 | 130 | 29 416 000 | 65 |
| 27 891 000 | 306 | | | 29 125 000 | 99, 224 | 29 307 DC3 | 130 | 29 416 IG0 | 65 |
| 27 892 000 | 324 | 29 025 002 | 21, 22 | 29 126 000 | 99, 225 | 29 337 003 | 170 | 29 417 000 | 65 |
| 27 921 000 | 280 | 29 032 000 | 44, 53 | 29 126 A00 | 99, 225 | 29 338 003 | 171 | 29 417 IG0 | 65 |
| 27 923 003 | 308 | 29 033 000 | 43, 53 | 29 126 AL0 | 99, 225 | 29 338 2433 | 171 | 29 418 000 | 66 |
| 27 924 003 | 310 | 29 037 000 | 52, 61 | 29 126 DAO | 99, 225 | 29 353 001 | 185 | 29 418 IG0 | 66 |
| 27 925 003 | 311 | 29 037 002 | 24 | 29 126 DC0 | 99, 225 | 29 396 000 | 24 | 29 420 000 | 67 |
| 27 933 000 | 279 | 29 039 001 | 185 | 29 126 DL0 | 99, 225 | 29 396 AL0 | 24 | 29 420 IG0 | 67 |
| 27 968 001 | 257 | 29 040 001 | 184 | 29 126 GL0 | 99, 225 | 29 396 DA0 | 24 | 29 507 KF0 | 227 |
| 28 | | 29 041 001 | 188 | 29 126 GN0 | 99, 225 | 29 396 DC0 | 24 | 29 508 KF0 | 228 |
| | | 29 042 001 | 188 | 29 127 000 | 99, 225 | 29 396 DL0 | 24 | 29 517 000 | 59 |
| 28 020 L01 | 319 | 29 045 000 | 194 | 29 127 A00 | 99, 225 | 29 396 GL0 | 24 | 29 517 AL0 | 59 |
| 28 025 001 | 321 | 29 046 000 | 194 | 29 127 AL0 | 99, 225 | 29 396 GN0 | 24 | 29 517 DCO | 59 |
| 28 105 001 | 321 | 29 047 000 | 191 | 29 127 DC0 | 99, 225 | 29 397 000 | 23 | 29 519 000 | 60 |
| 28 139 001 | 321 | 29 048 000 | 191 | 29 127 DL0 | 99, 225 | 29 397 AL0 | 23 | 29 519 AL0 | 60 |
| 28 140 001 | 321 | 29 079 001 | 184 | 29 127 GN0 | 99, 225 | 29 397 DA0 | 23 | 29 519 DCO | 60 |
| 28 142 002 | 321 | 29 081 001 | 188 | 29 144 000 | 112 | 29 397 DC0 | 23 | 29 521 000 | 60 |
| 28 143 001 | 321 | 29 086 000 | 52, 62 | 29 145 000 | 113 | 29 397 DL0 | 23 | 29 521 AL0 | 60 |
| 28 143 KS1 | 321 | 29 097 003 | 155 | 29 146 000 | 113 | 29 397 GL0 | 23 | 29 521 DCO | 60 |
| 28 143 LS1 | 321 | 29 098 003 | 157 | 29 147 000 | 112 | 29 397 GN0 | 23 | 29 523 000 | 61 |
| 28 145 001 | 321 | 29 099 003 | 158 | 29 148 000 | 112 | 29 398 000 | 53 | 29 523 AL0 | 61 |
| 28 150 002 | 323 | 29 118 000 | 100, 227 | 29 149 000 | 112 | 29 398 AL0 | 53 | 29 523 DCO | 61 |
| 28 151 002 | 323 | 29 118 A00 | 100, 227 | 29 150 LS0 | 228 | 29 398 DC0 | 53 | 29 525 000 | 61 |
| 28 154 002 | 323 | 29 118 AL0 | 100, 227 | 29 151 LS0 | 229 | 29 399 000 | 53 | 29 525 AL0 | 61 |
| 28 155 002 | 323 | 29 118 DAO | 100, 227 | 29 152 LS0 | 229 | 29 399 AL0 | 53 | 29 525 DCO | 61 |
| 28 158 001 | 323 | 29 118 DC0 | 100, 227 | 29 153 LS0 | 225 | 29 399 DC0 | 53 | 29 527 000 | 62 |
| 28 361 000 | 292 | 29 118 DL0 | 100, 227 | 29 156 LS0 | 226 | 29 402 000 | 50 | 29 527 AL0 | 62 |
| 28 362 001 | 322 | 29 118 GL0 | 100, 227 | 29 157 LS0 | 226 | 29 402 AL0 | 50 | 29 527 DCO | 62 |
| 28 362 A01 | 322 | 29 118 GN0 | 227 | 29 158 LS0 | 226 | 29 402 DC0 | 50 | 29 800 000 | 250 |
| 28 362 DA1 | 322 | 29 119 000 | 100, 227 | 29 176 001 | 41 | 29 403 000 | 50 | 29 802 000 | 250 |
| 28 362 DC1 | 322 | 29 119 A00 | 100, 227 | 29 176 AL1 | 41 | 29 403 AL0 | 50 | 29 805 000 | 250 |
| 28 362 GL1 | 322 | 29 119 AL0 | 100, 227 | 29 176 DA1 | 41 | 29 403 DC0 | 50 | 29 904 LS0 | 229 |
| 28 362 KF1 | 322 | 29 119 DAO | 100, 227 | 29 176 DC1 | 41 | 29 405 000 | 52 | | |
| 28 364 001 | 322 | 29 119 DC0 | 100, 227 | 29 176 DL1 | 41 | 29 405 AL0 | 52 | | |
| 28 368 00E | 289 | 29 119 DL0 | 100, 227 | 29 176 GL1 | 41 | 29 405 DC0 | 52 | 30 079 001 | 347 |
| 28 373 000 | 289 | 29 119 GL0 | 100, 227 | 29 176 GN1 | 41 | 29 406 000 | 16 | 30 079 DC1 | 347 |
| 28 388 001 | 322 | 29 119 GN0 | 227 | 29 181 002 | 41 | 29 406 AL0 | 16 | 30 080 001 | 348 |
| 28 388 A01 | 322 | 29 120 000 | 100, 227 | 29 181 AL2 | 41 | 29 406 DAO | 16 | 30 083 001 | 347 |
| 28 388 DA1 | 322 | 29 121 000 | 101, 228 | 29 181 DA2 | 41 | 29 406 DC0 | 16 | 30 083 AL1 | 347 |
| 28 388 DC1 | 322 | 29 121 A00 | 101, 228 | 29 181 DC2 | 41 | 29 406 DL0 | 16 | 30 083 DC1 | 347 |
| 28 388 GL1 | 322 | 29 121 AL0 | 101, 228 | 29 181 DL2 | 41 | 29 406 GL0 | 16 | 30 083 KS1 | 347 |
| 28 388 KF1 | 322 | 29 121 DAO | 101, 228 | 29 181 GL2 | 41 | 29 406 GN0 | 16 | 30 085 001 | 348 |
| 28 409 002 | 322 | 29 121 DC0 | 101, 228 | 29 181 GN2 | 41 | 29 407 000 | 24 | 30 085 AL1 | 348 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|-------------|------|-------------|------|------------|------|-------------|------|-------------|------|
| 30 085 DC1 | 348 | 30 543 000 | 369 | 31 456 001 | 339 | 31 647 AP0 | 386 | 32 322 DC2 | 357 |
| 30 098 001 | 368 | 30 547 000 | 369 | 31 456 DC1 | 339 | 31 648 AP0 | 386 | 32 322 DL2 | 357 |
| 30 193 000 | 364 | 30 567 000 | 365 | 31 481 001 | 364 | 31 649 AP0 | 386 | 32 467 003 | 168 |
| 30 193 DC0 | 364 | 30 567 2430 | 365 | 31 483 002 | 362 | 31 650 AP0 | 382 | 32 467 2433 | 168 |
| 30 219 002 | 351 | 30 567 DC0 | 365 | 31 483 DC2 | 362 | 31 651 AP0 | 382 | 32 469 20E | 141 |
| 30 219 DC2 | 351 | 30 580 000 | 342 | 31 491 000 | 362 | 31 652 AP0 | 382 | 32 482 003 | 367 |
| 30 273 001 | 363 | 30 582 000 | 342 | 31 491 DC0 | 362 | 31 653 AP0 | 384 | 32 488 000 | 359 |
| 30 273 DC1 | 363 | 30 583 000 | 342 | 31 498 001 | 340 | 31 654 AP0 | 384 | 32 488 AL0 | 359 |
| 30 274 000 | 357 | 30 583 DC0 | 342 | 31 498 AL1 | 340 | 31 655 AP0 | 384 | 32 488 DC0 | 359 |
| 30 274 A00 | 357 | 30 588 000 | 342 | 31 498 DC1 | 340 | 31 656 AP0 | 388 | 32 488 DL0 | 359 |
| 30 274 AL0 | 357 | 30 590 000 | 343 | 31 498 DL1 | 340 | 31 657 AP0 | 383 | 32 553 002 | 352 |
| 30 274 DAO | 357 | 30 590 DC0 | 343 | 31 509 003 | 367 | 31 658 AP0 | 383 | 32 553 DC2 | 352 |
| 30 274 DC0 | 357 | 30 590 KF0 | 343 | 31 536 001 | 370 | 31 680 000 | 370 | 32 612 003 | 126 |
| 30 274 DL0 | 357 | 30 609 000 | 27 | 31 539 000 | 339 | 31 693 000 | 370 | 32 612 AL3 | 126 |
| 30 274 GNO | 357 | 30 609 AL0 | 27 | 31 539 DC0 | 339 | 31 706 000 | 369 | 32 612 DC3 | 126 |
| 30 294 A00 | 354 | 30 609 DC0 | 27 | 31 539 KS0 | 339 | 31 719 SD0 | 381 | 32 618 003 | 128 |
| 30 294 AL0 | 354 | 30 609 DL0 | 27 | 31 541 000 | 337 | 31 720 SD0 | 381 | 32 618 AL3 | 128 |
| 30 294 DL0 | 354 | 30 609 GNO | 27 | 31 541 DC0 | 337 | 31 726 SD0 | 376 | 32 618 DC3 | 128 |
| 30 294 GL0 | 354 | 30 619 000 | 365 | 31 541 KS0 | 337 | 31 812 001 | 368 | 32 629 002 | 145 |
| 30 294 GNO | 354 | 30 619 2430 | 365 | 31 543 000 | 340 | 31 855 SD0 | 377 | 32 661 003 | 362 |
| 30 305 001 | 365 | 30 619 DC0 | 365 | 31 543 DC0 | 340 | 31 886 000 | 351 | 32 661 DC3 | 362 |
| 30 305 2431 | 365 | 31 | | 31 545 001 | 336 | 31 886 DC0 | 351 | 32 663 003 | 362 |
| 30 305 DC1 | 365 | 31 | | 31 552 SD1 | 380 | 31 889 000 | 356 | 32 663 DC3 | 362 |
| 30 321 DG0 | 354 | 31 128 001 | 363 | 31 562 SD1 | 379 | 31 889 DC0 | 356 | 32 667 001 | 363 |
| 30 321 DP0 | 354 | 31 128 DC1 | 363 | 31 563 SD1 | 378 | 31 892 000 | 353 | 32 734 001 | 177 |
| 30 321 DU0 | 354 | 31 129 001 | 363 | 31 564 SD1 | 379 | 31 892 DC0 | 353 | 32 740 001 | 180 |
| 30 321 GE0 | 354 | 31 129 DC1 | 363 | 31 565 SD1 | 379 | 31 892 KF0 | 353 | 32 742 001 | 180 |
| 30 321 HG0 | 354 | 31 187 001 | 368 | 31 571 SD1 | 377 | 31 928 KF0 | 353 | 32 743 001 | 180 |
| 30 321 MW0 | 354 | 31 191 001 | 368 | 31 572 SD1 | 378 | 32 | | 32 747 001 | 181 |
| 30 321 TY0 | 354 | 31 255 000 | 360 | 31 573 SD1 | 379 | 32 | | 32 757 001 | 37 |
| 30 321 XC0 | 354 | 31 255 DC0 | 360 | 31 574 AL1 | 375 | 32 067 000 | 358 | 32 757 AL1 | 37 |
| 30 321 YF0 | 354 | 31 302 002 | 334 | 31 574 DL1 | 375 | 32 109 001 | 115 | 32 757 DA1 | 37 |
| 30 321 YR0 | 354 | 31 302 DC2 | 334 | 31 574 GN1 | 375 | 32 109 AL1 | 115 | 32 757 DC1 | 37 |
| 30 325 001 | 347 | 31 323 002 | 332 | 31 574 SD1 | 375 | 32 109 DC1 | 115 | 32 757 DL1 | 37 |
| 30 325 DC1 | 347 | 31 323 DC2 | 332 | 31 575 SD1 | 375 | 32 114 001 | 115 | 32 757 GL1 | 37 |
| 30 327 001 | 348 | 31 325 002 | 333 | 31 576 SD1 | 375 | 32 114 AL1 | 115 | 32 757 GN1 | 37 |
| 30 327 AL1 | 348 | 31 325 DC2 | 333 | 31 577 SD1 | 376 | 32 114 DC1 | 115 | 32 762 000 | 412 |
| 30 327 DC1 | 348 | 31 326 002 | 333 | 31 578 SD1 | 376 | 32 146 001 | 37 | 32 763 000 | 412 |
| 30 327 KS1 | 348 | 31 326 DC2 | 333 | 31 580 SD1 | 377 | 32 146 AL1 | 37 | 32 765 000 | 412 |
| 30 339 001 | 349 | 31 347 003 | 332 | 31 581 SD1 | 373 | 32 146 DA1 | 37 | 32 767 000 | 412 |
| 30 339 DC1 | 349 | 31 347 DC3 | 332 | 31 582 SD1 | 373 | 32 146 DC1 | 37 | 32 778 000 | 412 |
| 30 463 000 | 366 | 31 358 002 | 356 | 31 583 SD1 | 373 | 32 146 DL1 | 37 | 32 788 000 | 413 |
| 30 463 2430 | 366 | 31 358 DC2 | 356 | 31 584 SD1 | 374 | 32 146 GL1 | 37 | 32 789 000 | 413 |
| 30 463 DC0 | 366 | 31 360 001 | 356 | 31 585 SD1 | 374 | 32 146 GN1 | 37 | 32 790 000 | 413 |
| 30 484 001 | 368 | 31 360 DC1 | 356 | 31 586 SD1 | 374 | 32 168 000 | 357 | 32 792 000 | 413 |
| 30 503 000 | 353 | 31 367 001 | 370 | 31 588 SD1 | 378 | 32 168 DC0 | 357 | 32 795 000 | 413 |
| 30 503 DC0 | 353 | 31 368 001 | 369 | 31 593 002 | 351 | 32 172 2433 | 171 | 32 825 00E | 163 |
| 30 503 KF0 | 353 | 31 375 000 | 358 | 31 593 DC2 | 351 | 32 204 10E | 144 | 32 826 001 | 40 |
| 30 504 000 | 354 | 31 375 AL0 | 358 | 31 613 000 | 356 | 32 207 001 | 144 | 32 826 AL1 | 40 |
| 30 504 A00 | 354 | 31 375 DC0 | 358 | 31 613 A00 | 356 | 32 208 001 | 146 | 32 826 DA1 | 40 |
| 30 504 AL0 | 354 | 31 375 DL0 | 358 | 31 613 DC0 | 356 | 32 210 001 | 146 | 32 826 DC1 | 40 |
| 30 504 DAO | 354 | 31 375 GNO | 358 | 31 615 000 | 353 | 32 211 001 | 146 | 32 826 DL1 | 40 |
| 30 504 DC0 | 354 | 31 379 000 | 350 | 31 615 A00 | 353 | 32 212 001 | 146 | 32 826 GL1 | 40 |
| 30 504 DL0 | 354 | 31 379 DC0 | 350 | 31 615 AL0 | 353 | 32 213 001 | 147 | 32 826 GN1 | 40 |
| 30 504 GL0 | 354 | 31 391 003 | 367 | 31 615 DAO | 353 | 32 214 001 | 147 | 32 830 001 | 164 |
| 30 504 GNO | 354 | 31 395 000 | 360 | 31 615 DC0 | 353 | 32 224 003 | 366 | 32 831 000 | 165 |
| 30 504 KF0 | 354 | 31 395 DC0 | 360 | 31 615 DL0 | 353 | 32 257 002 | 361 | 32 831 AL0 | 165 |
| 30 505 000 | 355 | 31 454 001 | 338 | 31 615 GL0 | 353 | 32 259 003 | 361 | 32 831 GL0 | 165 |
| 30 505 A00 | 355 | 31 454 AL1 | 338 | 31 615 GN0 | 353 | 32 294 002 | 351 | 32 832 000 | 165 |
| 30 505 AL0 | 355 | 31 454 DC1 | 338 | 31 639 AP0 | 387 | 32 294 DC2 | 351 | 32 837 000 | 165 |
| 30 505 DA0 | 355 | 31 454 DL1 | 338 | 31 640 AP0 | 387 | 32 321 002 | 357 | 32 837 AL0 | 165 |
| 30 505 DC0 | 355 | 31 454 KS1 | 338 | 31 641 AP0 | 387 | 32 321 AL2 | 357 | 32 837 GL0 | 165 |
| 30 505 DL0 | 355 | 31 455 001 | 336 | 31 642 AP0 | 388 | 32 321 DC2 | 357 | 32 839 000 | 165 |
| 30 505 GL0 | 355 | 31 455 AL1 | 336 | 31 643 AP0 | 388 | 32 321 DL2 | 357 | 32 842 000 | 364 |
| 30 505 GNO | 355 | 31 455 DC1 | 336 | 31 644 AP0 | 385 | 32 321 GN2 | 357 | 32 843 002 | 364 |
| 30 505 KF0 | 355 | 31 455 DL1 | 336 | 31 645 AP0 | 385 | 32 322 002 | 357 | 32 843 20E | 364 |
| 30 536 000 | 369 | 31 455 KS1 | 336 | 31 646 AP0 | 385 | 32 322 AL2 | 357 | 32 843 DC2 | 364 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|-------------|------|-------------|------|------------|----------|------------|------|------------|------|
| 32 846 001 | 39 | 33 591 002 | 150 | 34 864 DL0 | 230 | 36 442 000 | 392 | 37 535 A00 | 476 |
| 32 846 AL1 | 39 | 33 591 003 | 156 | 34 864 GL0 | 230 | 36 444 000 | 394 | 37 535 AL0 | 476 |
| 32 846 DA1 | 39 | 33 591 LS3 | 156 | 34 864 GNO | 230 | 36 445 000 | 394 | 37 535 DAO | 476 |
| 32 846 DC1 | 39 | 33 635 002 | 151 | 34 865 000 | 229 | 36 445 A00 | 394 | 37 535 DCO | 476 |
| 32 846 DL1 | 39 | 33 637 002 | 151 | 34 865 KF0 | 229 | 36 445 AL0 | 394 | 37 535 DLO | 476 |
| 32 846 GL1 | 39 | 33 770 002 | 361 | 34 866 000 | 230 | 36 445 DA0 | 394 | 37 535 GL0 | 476 |
| 32 846 GN1 | 39 | 33 848 001 | 117 | 34 867 000 | 230 | 36 445 DC0 | 394 | 37 535 GN0 | 476 |
| 32 848 000 | 192 | 33 848 AL1 | 117 | 34 868 000 | 236, 239 | 36 445 DL0 | 394 | 37 535 KF0 | 476 |
| 32 864 000 | 190 | 33 848 DC1 | 117 | 34 869 000 | 235 | 36 445 GL0 | 394 | 37 535 P00 | 476 |
| 32 865 000 | 190 | 33 849 001 | 117 | 34 870 000 | 233 | 36 445 GN0 | 394 | 37 535 SH0 | 476 |
| 32 867 000 | 190 | 33 849 AL1 | 117 | 34 871 000 | 233 | 36 446 000 | 394 | 37 547 000 | 484 |
| 32 868 000 | 190 | 33 849 DC1 | 117 | 34 872 000 | 235 | 36 447 000 | 395 | 37 547 P00 | 484 |
| 32 879 000 | 167 | 33 850 001 | 118 | 34 873 000 | 113 | 36 451 000 | 407 | 37 547 SH0 | 484 |
| 32 880 000 | 166 | 33 865 001 | 117 | 35 028 000 | 23, 24 | 36 452 000 | 407 | 37 578 001 | 458 |
| 32 917 000 | 358 | 33 865 AL1 | 117 | 35 031 000 | 97, 250 | 36 453 000 | 407 | 37 601 000 | 476 |
| 32 917 AL0 | 358 | 33 865 DC1 | 117 | 35 107 000 | 98, 251 | 36 454 000 | 401 | 37 601 A00 | 476 |
| 32 917 DC0 | 358 | 34 020 001 | 410 | 35 500 000 | 97 | 36 455 000 | 401 | 37 601 AL0 | 476 |
| 32 917 DL0 | 358 | 34 169 001 | 237 | 35 604 000 | 17 | 36 456 000 | 403 | 37 601 DAO | 476 |
| 32 917 KS0 | 358 | 34 174 001 | 237 | 36 015 001 | 397 | 36 457 000 | 403 | 37 601 DCO | 476 |
| 32 918 000 | 358 | 34 464 001 | 237 | 36 016 001 | 397 | 36 458 000 | 403 | 37 601 DL0 | 476 |
| 32 918 00E | 358 | 34 469 001 | 237 | 36 194 000 | 372 | 36 459 000 | 403 | 37 601 GL0 | 476 |
| 32 918 DC0 | 358 | 34 478 000 | 238 | 36 207 001 | 397 | 36 463 000 | 403 | 37 601 GN0 | 476 |
| 32 926 2433 | 168 | 34 497 000 | 238 | 36 208 001 | 397 | 36 464 000 | 403 | 37 601 KF0 | 476 |
| 32 929 003 | 171 | 34 558 000 | 244 | 36 209 000 | 398 | 36 472 000 | 78 | 37 601 P00 | 476 |
| 32 929 2433 | 171 | 34 565 002 | 244 | 36 264 001 | 392, 395 | 36 473 000 | 78 | 37 601 SH0 | 476 |
| 32 950 000 | 350 | 34 567 000 | 244 | 36 265 000 | 415 | 36 474 000 | 77 | 37 624 000 | 477 |
| 32 950 DC0 | 350 | 34 712 000 | 113 | 36 266 000 | 415 | 36 475 000 | 77 | 37 624 A00 | 477 |
| 33 163 003 | 126 | 34 718 000 | 231 | 36 267 000 | 415 | 36 476 000 | 77 | 37 624 AL0 | 477 |
| 33 190 20E | 141 | 34 719 000 | 231 | 36 268 000 | 415 | 36 508 SH0 | 418 | 37 624 DAO | 477 |
| 33 202 003 | 365 | 34 726 000 | 235 | 36 271 000 | 405 | 37 044 000 | 473 | 37 624 DC0 | 477 |
| 33 202 2433 | 365 | 34 730 000 | 233 | 36 273 000 | 405 | 37 048 000 | 467 | 37 624 DL0 | 477 |
| 33 241 003 | 129 | 34 732 000 | 235 | 36 274 000 | 405 | 37 060 000 | 482 | 37 624 GL0 | 477 |
| 33 244 002 | 142 | 34 734 000 | 233 | 36 315 000 | 402 | 37 063 000 | 484 | 37 624 GNO | 477 |
| 33 265 003 | 168 | 34 765 000 | 243 | 36 317 000 | 414 | 37 078 PI0 | 463 | 37 624 KF0 | 477 |
| 33 265 2433 | 168 | 34 766 000 | 243 | 36 318 000 | 414 | 37 088 PI0 | 464 | 37 624 P00 | 477 |
| 33 281 003 | 366 | 34 768 001 | 243 | 36 320 000 | 414 | 37 092 000 | 463 | 37 624 SH0 | 477 |
| 33 281 2433 | 366 | 34 793 000 | 245 | 36 321 000 | 414 | 37 095 000 | 463 | 38 393 SD1 | 468 |
| 33 281 243D | 366 | 34 793 2430 | 245 | 36 322 001 | 414 | 37 104 K00 | 464 | 38 415 001 | 458 |
| 33 281 30E | 366 | 34 796 001 | 245 | 36 325 002 | 399 | 37 108 000 | 466 | 38 422 000 | 462 |
| 33 281 DC3 | 366 | 34 813 001 | 132 | 36 327 002 | 399 | 37 139 000 | 466 | 38 445 SD0 | 484 |
| 33 300 003 | 172 | 34 814 003 | 240 | 36 330 002 | 400 | 37 153 000 | 467 | 38 505 000 | 479 |
| 33 300 2433 | 172 | 34 816 003 | 240 | 36 331 001 | 399 | 37 157 000 | 467 | 38 505 KF0 | 479 |
| 33 305 003 | 173 | 34 816 003 | 240 | 36 332 000 | 401 | 37 304 000 | 459 | 38 505 SHH | 479 |
| 33 330 002 | 142 | 34 819 005 | 241 | 36 333 000 | 401 | 37 311 K00 | 464 | 38 506 000 | 479 |
| 33 339 002 | 143 | 34 819 005 | 241 | 36 334 SD0 | 402 | 37 311 SD1 | 471 | 38 506 P00 | 479 |
| 33 395 002 | 143 | 34 824 005 | 240 | 36 335 SD0 | 402 | 37 321 SD1 | 471 | 38 506 SH0 | 479 |
| 33 547 003 | 129 | 34 827 000 | 242 | 36 336 001 | 402, 405 | 37 324 001 | 471 | 38 519 001 | 448 |
| 33 552 20E | 149 | 34 827 KF0 | 242 | 36 337 001 | 402, 405 | 37 324 SD1 | 471 | 38 525 001 | 448 |
| 33 553 003 | 129 | 34 830 000 | 242 | 36 338 000 | 393, 396 | 37 336 001 | 471 | 38 526 000 | 448 |
| 33 553 AL3 | 129 | 34 834 001 | 242 | 36 339 001 | 402 | 37 337 001 | 471 | 38 528 001 | 445 |
| 33 555 003 | 173 | 34 863 000 | 230 | 36 340 000 | 393, 395 | 37 338 000 | 472 | 38 536 001 | 447 |
| 33 558 LS3 | 153 | 34 863 AL0 | 230 | 36 376 000 | 402 | 37 339 000 | 473 | 38 543 000 | 452 |
| 33 565 002 | 149 | 34 863 DA0 | 230 | 36 386 001 | 401 | 37 342 000 | 473 | 38 553 001 | 451 |
| 33 565 003 | 155 | 34 863 DC0 | 230 | 36 407 001 | 393, 395 | 37 349 000 | 466 | 38 554 001 | 451 |
| 33 565 LS3 | 155 | 34 863 DL0 | 230 | 36 416 001 | 403 | 37 396 000 | 473 | 38 558 00M | 454 |
| 33 569 002 | 142 | 34 863 GL0 | 230 | 36 421 001 | 400 | 37 419 000 | 468 | 38 564 000 | 481 |
| 33 577 003 | 129 | 34 863 GNO | 230 | 36 422 001 | 399 | 37 419 SD0 | 468 | 38 564 SH0 | 481 |
| 33 577 AL3 | 129 | 34 863 KF0 | 230 | 36 439 001 | 400 | 37 421 000 | 470 | 38 565 000 | 481 |
| 33 577 DC3 | 129 | 34 864 000 | 230 | 36 440 000 | 392 | 37 489 000 | 464 | 38 565 SH0 | 481 |
| 33 590 002 | 150 | 34 864 AL0 | 230 | 36 441 000 | 392 | 37 521 PI0 | 463 | 38 573 000 | 481 |
| 33 590 003 | 155 | 34 864 DA0 | 230 | 36 441 AL0 | 392 | 37 522 PI0 | 463 | 38 573 SH0 | 481 |
| 33 590 LS3 | 155 | 34 864 DC0 | 230 | 36 441 DCO | 392 | 37 535 000 | 476 | 38 574 000 | 481 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|------------|----------|------------|----------|------------|----------|------------|------|------------|----------|
| 38 642 001 | 457 | 38 862 P00 | 480 | 39 479 00H | 428 | 40 279 DC1 | 47 | 40 367 DA1 | 212 |
| 38 643 001 | 457 | 38 862 SD0 | 480 | 39 480 00H | 428 | 40 279 DL1 | 47 | 40 367 DC1 | 212 |
| 38 661 000 | 462 | 38 862 SH0 | 480 | 39 481 00H | 428 | 40 279 GL1 | 47 | 40 367 DL1 | 212 |
| 38 672 SD0 | 481 | 38 863 000 | 462 | 39 482 00H | 428 | 40 279 GN1 | 47 | 40 367 GL1 | 212 |
| 38 698 SD1 | 468 | 38 882 000 | 483 | 39 483 00H | 429 | 40 284 001 | 46 | 40 367 GN1 | 212 |
| 38 699 001 | 468 | 38 915 KS0 | 481 | 39 488 000 | 429 | 40 284 AL1 | 46 | 40 368 001 | 207, 214 |
| 38 703 000 | 459 | 38 915 LS0 | 481 | 39 491 000 | 436 | 40 284 DA1 | 46 | 40 369 001 | 207 |
| 38 721 001 | 446 | 38 916 OA0 | 478 | 39 492 000 | 437 | 40 284 DC1 | 46 | 40 369 A01 | 207 |
| 38 723 001 | 456 | 38 994 000 | 447 | 39 493 000 | 438 | 40 284 DL1 | 46 | 40 369 AL1 | 207 |
| 38 729 000 | 458 | 39 | | 39 501 000 | 446 | 40 284 GL1 | 46 | 40 369 DA1 | 207 |
| 38 732 000 | 478 | | | 39 538 000 | 432 | 40 284 GN1 | 46 | 40 369 DC1 | 207 |
| 38 732 A00 | 478 | 39 052 000 | 451 | 39 554 000 | 431 | 40 339 001 | 46 | 40 369 DL1 | 207 |
| 38 732 AL0 | 478 | 39 140 000 | 453 | 39 564 00H | 424 | 40 339 AL1 | 46 | 40 369 GL1 | 207 |
| 38 732 BRO | 478 | 39 165 000 | 457 | 39 565 00H | 424 | 40 339 DA1 | 46 | 40 369 GN1 | 207 |
| 38 732 DAO | 478 | 39 201 000 | 431 | 39 566 00H | 424 | 40 339 DC1 | 46 | 40 371 001 | 209 |
| 38 732 DCO | 478 | 39 202 000 | 431 | 39 567 00H | 424 | 40 339 DL1 | 46 | 40 371 A01 | 209 |
| 38 732 DL0 | 478 | 39 206 000 | 432 | 39 568 00H | 424 | 40 339 GL1 | 46 | 40 371 AL1 | 209 |
| 38 732 GL0 | 478 | 39 208 000 | 433 | 39 570 000 | 425 | 40 339 GN1 | 46 | 40 371 DA1 | 209 |
| 38 732 GN0 | 478 | 39 245 00H | 429 | 39 571 00H | 425 | 40 340 001 | 47 | 40 371 DC1 | 209 |
| 38 732 KF0 | 478 | 39 300 000 | 441 | 39 572 00H | 425 | 40 340 AL1 | 47 | 40 371 DL1 | 209 |
| 38 732 KV0 | 478 | 39 301 000 | 441 | 39 573 00H | 425 | 40 340 DA1 | 47 | 40 371 GL1 | 209 |
| 38 732 P00 | 478 | 39 302 000 | 441 | 39 574 00H | 426 | 40 340 DC1 | 47 | 40 371 GN1 | 209 |
| 38 732 SD0 | 478 | 39 306 000 | 441 | 39 575 00H | 426 | 40 340 DL1 | 47 | 40 372 001 | 207, 214 |
| 38 732 SH0 | 478 | 39 323 000 | 430 | 39 577 001 | 426 | 40 340 GL1 | 47 | 40 374 001 | 212 |
| 38 732 SHH | 479 | 39 327 000 | 430 | 39 579 000 | 426 | 40 340 GN1 | 47 | 40 374 A01 | 212 |
| 38 748 002 | 393, 395 | 39 328 000 | 431 | 39 596 000 | 418, 420 | 40 341 001 | 46 | 40 374 AL1 | 212 |
| 38 763 001 | 445 | 39 328 10H | 432 | 39 598 000 | 418, 421 | 40 341 AL1 | 46 | 40 374 DA1 | 212 |
| 38 765 000 | 477 | 39 330 002 | 432 | 39 603 000 | 444 | 40 341 DA1 | 46 | 40 374 DC1 | 212 |
| 38 765 KF0 | 477 | 39 331 002 | 433 | 39 608 00H | 424 | 40 341 DC1 | 46 | 40 374 DL1 | 212 |
| 38 765 KV0 | 477 | 39 335 000 | 430 | 39 609 00H | 425 | 40 341 DL1 | 46 | 40 374 GL1 | 212 |
| 38 765 P00 | 477 | 39 336 000 | 430 | 39 683 000 | 458 | 40 341 GL1 | 46 | 40 374 GN1 | 212 |
| 38 765 SH0 | 477 | 39 337 000 | 430 | 39 687 000 | 447 | 40 341 GN1 | 46 | 40 385 001 | 212 |
| 38 772 001 | 446 | 39 339 000 | 432 | 39 694 000 | 462 | 40 342 001 | 46 | 40 385 A01 | 212 |
| 38 776 SD0 | 478 | 39 340 000 | 433 | 39 699 000 | 449, 454 | 40 342 AL1 | 46 | 40 385 AL1 | 212 |
| 38 784 000 | 485 | 39 346 000 | 440 | 39 806 000 | 434 | 40 342 DA1 | 46 | 40 385 DA1 | 212 |
| 38 784 P00 | 485 | 39 347 000 | 439 | 39 807 000 | 434 | 40 342 DC1 | 46 | 40 385 DC1 | 212 |
| 38 784 SD0 | 485 | 39 349 000 | 437 | 39 808 000 | 434 | 40 342 DL1 | 46 | 40 385 DL1 | 212 |
| 38 784 SH0 | 485 | 39 351 000 | 439 | 39 809 000 | 434 | 40 342 GL1 | 46 | 40 385 GL1 | 212 |
| 38 786 001 | 450 | 39 354 SH1 | 420 | 39 810 000 | 434 | 40 342 GN1 | 46 | 40 385 GN1 | 212 |
| 38 796 000 | 483 | 39 367 000 | 472 | 39 813 000 | 434 | 40 344 001 | 213 | 40 386 001 | 209 |
| 38 804 000 | 485 | 39 368 000 | 472 | 39 840 000 | 456 | 40 364 001 | 210 | 40 386 A01 | 209 |
| 38 804 P00 | 485 | 39 376 000 | 450 | 39 881 000 | 469 | 40 364 A01 | 210 | 40 386 AL1 | 209 |
| 38 804 SH0 | 485 | 39 386 00H | 427 | 39 881 KF0 | 469 | 40 364 AL1 | 210 | 40 386 DA1 | 209 |
| 38 805 000 | 483 | 39 420 000 | 435 | 39 881 SH0 | 469 | 40 364 DA1 | 210 | 40 386 DC1 | 209 |
| 38 808 000 | 485 | 39 421 000 | 435 | 39 882 000 | 469 | 40 364 DC1 | 210 | 40 386 DL1 | 209 |
| 38 808 P00 | 485 | 39 423 000 | 430, 435 | 39 882 KF0 | 469 | 40 364 DL1 | 210 | 40 386 GL1 | 209 |
| 38 808 SH0 | 485 | 39 425 000 | 435 | 39 882 SH0 | 469 | 40 364 GL1 | 210 | 40 386 GN1 | 209 |
| 38 809 000 | 476 | 39 426 000 | 435 | 39 910 000 | 436 | 40 364 GN1 | 210 | 40 392 000 | 212, 216 |
| 38 821 000 | 478 | 39 427 000 | 436 | 39 912 000 | 436 | 40 365 001 | 208 | 40 393 000 | 212, 216 |
| 38 825 000 | 456 | 39 428 000 | 437 | 39 913 000 | 436 | 40 365 A01 | 208 | 40 394 001 | 207, 214 |
| 38 844 000 | 479 | 39 429 000 | 437 | 39 939 000 | 446 | 40 365 AL1 | 208 | 40 394 A01 | 207 |
| 38 844 KF0 | 479 | 39 432 000 | 438 | 39 958 00H | 72 | 40 365 DA1 | 208 | 40 394 AL1 | 207, 214 |
| 38 844 KV0 | 479 | 39 433 000 | 438 | 39 966 00H | 72 | 40 365 DC1 | 208 | 40 394 DA1 | 207 |
| 38 844 P00 | 479 | 39 436 000 | 437 | 39 980 KS0 | 73 | 40 365 DL1 | 208 | 40 394 DC1 | 207, 214 |
| 38 844 SH0 | 479 | 39 437 000 | 437 | 39 980 LS0 | 73 | 40 365 GL1 | 208 | 40 394 DL1 | 207 |
| 38 845 KS0 | 477 | 39 438 000 | 438 | 40 | | 40 365 GN1 | 208 | 40 394 GL1 | 207 |
| 38 845 LS0 | 477 | 39 439 000 | 438 | | | 40 366 001 | 209 | 40 394 GN1 | 207 |
| 38 845 MF0 | 477 | 39 440 000 | 435 | 40 278 001 | 45 | 40 366 A01 | 209 | 40 400 AL0 | 389 |
| 38 857 000 | 485 | 39 452 000 | 456 | 40 278 AL1 | 45 | 40 366 AL1 | 209 | 40 400 DL0 | 389 |
| 38 857 P00 | 485 | 39 462 000 | 431 | 40 278 DA1 | 45 | 40 366 DA1 | 209 | 40 400 GN0 | 389 |
| 38 857 SH0 | 485 | 39 469 00H | 427 | 40 278 DC1 | 45 | 40 366 DC1 | 209 | 40 404 001 | 345 |
| 38 858 000 | 479 | 39 473 00H | 427 | 40 278 DL1 | 45 | 40 366 DL1 | 209 | 40 405 001 | 344 |
| 38 858 P00 | 479 | 39 474 00H | 427 | 40 278 GL1 | 45 | 40 366 GL1 | 209 | 40 407 001 | 213 |
| 38 858 SH0 | 479 | 39 475 00H | 427 | 40 278 GN1 | 45 | 40 366 GN1 | 209 | 40 407 DC1 | 213 |
| 38 860 000 | 445 | 39 476 00H | 427 | 40 279 001 | 47 | 40 367 001 | 212 | 40 412 001 | 345 |
| 38 861 000 | 480 | 39 477 00H | 428 | 40 279 AL1 | 47 | 40 367 A01 | 212 | 40 421 001 | 210 |
| 38 862 000 | 480 | 39 478 00H | 428 | 40 279 DA1 | 47 | 40 367 AL1 | 212 | 40 421 A01 | 210 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|-------------|------|------------|---------|-------------|--------|------------|----------|-------------|----------|
| 40 421 AL1 | 210 | 40 656 001 | 221 | 40 802 GN1 | 210 | 40 887 GL0 | 26 | 40 956 DA1 | 47 |
| 40 421 DA1 | 210 | 40 657 001 | 221 | 40 804 000 | 205 | 40 888 000 | 26 | 40 956 DC1 | 47 |
| 40 421 DC1 | 210 | 40 659 001 | 221 | 40 805 000 | 204 | 40 888 AL0 | 26 | 40 956 DL1 | 47 |
| 40 421 DL1 | 210 | 40 663 001 | 219 | 40 806 000 | 204 | 40 888 DA0 | 26 | 40 956 GL1 | 47 |
| 40 421 GL1 | 210 | 40 664 001 | 220 | 40 807 000 | 205 | 40 888 DC0 | 26 | 40 956 GN1 | 47 |
| 40 421 GN1 | 210 | 40 688 001 | 209 | 40 808 000 | 206 | 40 888 DL0 | 26 | 40 960 000 | 71 |
| 40 430 001 | 345 | 40 688 A01 | 209 | 40 809 000 | 206 | 40 888 GL0 | 26 | 40 960 IG0 | 71 |
| 40 432 000 | 349 | 40 688 AL1 | 209 | 40 830 001 | 349 | 40 888 GN0 | 26 | 40 962 000 | 346 |
| 40 434 001 | 345 | 40 688 DA1 | 209 | 40 831 001 | 349 | 40 889 000 | 26 | 40 963 001 | 45 |
| 40 437 000 | 344 | 40 688 DC1 | 209 | 40 843 000 | 346 | 40 889 AL0 | 26 | 40 963 AL1 | 45 |
| 40 444 001 | 208 | 40 688 DL1 | 209 | 40 848 AL0 | 344 | 40 889 DA0 | 26 | 40 963 DA1 | 45 |
| 40 444 DC1 | 208 | 40 688 GL1 | 209 | 40 848 DL0 | 344 | 40 889 DC0 | 26 | 40 963 DC1 | 45 |
| 40 447 001 | 208 | 40 688 GN1 | 209 | 40 848 GN0 | 344 | 40 889 DL0 | 26 | 40 963 DL1 | 45 |
| 40 447 DC1 | 208 | 40 689 001 | 211 | 40 848 SD0 | 344 | 40 889 GL0 | 26 | 40 963 GL1 | 45 |
| 40 448 001 | 208 | 40 689 A01 | 211 | 40 849 000 | 346 | 40 890 000 | 26 | 40 963 GN1 | 45 |
| 40 448 DC1 | 208 | 40 689 AL1 | 211 | 40 852 AL0 | 371 | 40 890 AL0 | 26 | 40 964 001 | 26, 46 |
| 40 457 001 | 219 | 40 689 DA1 | 211 | 40 852 DL0 | 371 | 40 890 DA0 | 26 | 40 965 001 | 47 |
| 40 459 001 | 218 | 40 689 DC1 | 211 | 40 852 GN0 | 371 | 40 890 DC0 | 26 | 40 967 001 | 48 |
| 40 460 001 | 218 | 40 689 DL1 | 211 | 40 852 SD0 | 371 | 40 890 DL0 | 26 | 40 967 AL1 | 48 |
| 40 461 001 | 219 | 40 689 GL1 | 211 | 40 853 AL0 | 371 | 40 890 GL0 | 26 | 40 967 DA1 | 48 |
| 40 462 001 | 219 | 40 689 GN1 | 211 | 40 853 DL0 | 371 | 40 891 000 | 27 | 40 967 DC1 | 48 |
| 40 463 001 | 219 | 40 691 002 | 345 | 40 853 GN0 | 371 | 40 891 AL0 | 27 | 40 967 DL1 | 48 |
| 40 507 001 | 216 | 40 694 000 | 345 | 40 853 SD0 | 371 | 40 891 DA0 | 27 | 40 967 GL1 | 48 |
| 40 507 AL1 | 216 | 40 696 AL0 | 213 | 40 854 AL0 | 371 | 40 891 DC0 | 27 | 40 967 GN1 | 48 |
| 40 507 DC1 | 216 | 40 696 DA0 | 213 | 40 854 DL0 | 371 | 40 891 DL0 | 27 | 40 986 AL0 | 371, 389 |
| 40 508 001 | 214 | 40 696 DC0 | 213 | 40 854 GN0 | 371 | 40 891 GL0 | 27 | 40 986 DL0 | 371, 389 |
| 40 508 AL1 | 214 | 40 696 GL0 | 213 | 40 854 SD0 | 371 | 40 892 000 | 27 | 40 986 GN0 | 371, 389 |
| 40 508 DC1 | 214 | 40 711 001 | 341 | 40 856 AL0 | 371 | 40 892 AL0 | 27 | 40 986 SD0 | 371, 389 |
| 40 509 001 | 215 | 40 752 L00 | 371 | 40 856 DL0 | 371 | 40 892 DA0 | 27 | 40 996 AL0 | 389 |
| 40 509 AL1 | 215 | 40 754 001 | 215 | 40 856 GN0 | 371 | 40 892 DC0 | 27 | 40 996 DL0 | 389 |
| 40 509 DC1 | 215 | 40 755 001 | 214 | 40 856 SD0 | 371 | 40 892 DL0 | 27 | 40 996 GN0 | 389 |
| 40 510 001 | 215 | 40 756 001 | 214 | 40 857 000 | 206 | 40 892 GL0 | 27 | 40 997 AL0 | 389 |
| 40 510 AL1 | 215 | 40 758 001 | 217 | 40 865 000 | 204 | 40 892 GN0 | 27 | 40 997 DL0 | 389 |
| 40 510 DC1 | 215 | 40 766 000 | 204 | 40 867 000 | 206 | 40 893 000 | 54 | 40 997 GN0 | 389 |
| 40 511 001 | 215 | 40 767 000 | 205 | 40 868 000 | 206 | 40 894 000 | 54 | 40 998 AL0 | 389 |
| 40 511 AL1 | 215 | 40 768 000 | 204 | 40 870 000 | 206 | 40 895 000 | 54 | 40 998 DL0 | 389 |
| 40 511 DC1 | 215 | 40 775 001 | 213 | 40 875 000 | 344 | 40 896 000 | 54 | 40 998 GN0 | 389 |
| 40 512 001 | 215 | 40 775 DC1 | 213 | 40 876 000 | 344 | 40 897 000 | 54 | 40 999 AL0 | 389 |
| 40 512 AL1 | 215 | 40 776 001 | 213 | 40 882 000 | 25, 45 | 40 898 000 | 54 | 40 999 DL0 | 389 |
| 40 512 DC1 | 215 | 40 778 001 | 216 | 40 883 000 | 25, 45 | 40 900 000 | 55 | 40 999 GN0 | 389 |
| 40 513 001 | 216 | 40 781 000 | 205 | 40 884 000 | 25 | 40 908 000 | 71 | | |
| 40 513 AL1 | 216 | 40 782 000 | 205 | 40 884 AL0 | 25 | 40 908 GL0 | 71 | | |
| 40 513 DC1 | 216 | 40 783 000 | 204 | 40 884 DAO | 25 | 40 909 000 | 70 | 41 027 000 | 199 |
| 40 514 001 | 216 | 40 784 000 | 205 | 40 884 DCO | 25 | 40 909 IG0 | 70 | 41 027 A00 | 199 |
| 40 514 AL1 | 216 | 40 791 001 | 27, 203 | 40 884 DL0 | 25 | 40 910 000 | 70 | 41 027 AL0 | 199 |
| 40 514 DC1 | 216 | 40 791 KS1 | 27, 203 | 40 884 GL0 | 25 | 40 910 IG0 | 70 | 41 027 DAO0 | 199 |
| 40 535 000 | 372 | 40 793 001 | 211 | 40 884 GNO | 25 | 40 911 000 | 454, 459 | 41 027 DC0 | 199 |
| 40 535 A00 | 372 | 40 793 DC1 | 211 | 40 885 000 | 25 | 40 923 000 | 70 | 41 027 DL0 | 199 |
| 40 535 AL0 | 372 | 40 794 001 | 211 | 40 885 AL0 | 25 | 40 923 IG0 | 70 | 41 027 GL0 | 199 |
| 40 535 DAO0 | 372 | 40 794 DC1 | 211 | 40 885 DAO0 | 25 | 40 928 000 | 70 | 41 027 GNO | 199 |
| 40 535 DC0 | 372 | 40 797 001 | 211 | 40 885 DCO | 25 | 40 928 IG0 | 70 | 41 028 000 | 199 |
| 40 535 DL0 | 372 | 40 799 001 | 211 | 40 885 DL0 | 25 | 40 929 000 | 70 | 41 028 A00 | 199 |
| 40 535 GL0 | 372 | 40 800 001 | 210 | 40 885 GL0 | 25 | 40 929 IG0 | 70 | 41 028 AL0 | 199 |
| 40 535 GNO | 372 | 40 800 A01 | 210 | 40 885 GNO | 25 | 40 930 000 | 70 | 41 028 DAO0 | 199 |
| 40 536 000 | 372 | 40 800 AL1 | 210 | 40 886 000 | 25, 45 | 40 930 IG0 | 70 | 41 028 DC0 | 199 |
| 40 536 DC0 | 372 | 40 800 DA1 | 210 | 40 886 A00 | 25, 45 | 40 946 000 | 71 | 41 028 DL0 | 199 |
| 40 554 002 | 334 | 40 800 DC1 | 210 | 40 886 AL0 | 25, 45 | 40 946 IG0 | 71 | 41 028 GL0 | 199 |
| 40 575 002 | 345 | 40 800 DL1 | 210 | 40 886 DAO | 25, 45 | 40 949 000 | 454, 459 | 41 028 GNO | 199 |
| 40 585 001 | 218 | 40 800 GL1 | 210 | 40 886 DCO | 25, 45 | 40 955 001 | 47 | 41 029 000 | 199 |
| 40 623 001 | 216 | 40 800 GN1 | 210 | 40 886 DL0 | 25, 45 | 40 955 AL1 | 47 | 41 035 000 | 199 |
| 40 623 AL1 | 216 | 40 802 001 | 210 | 40 886 GL0 | 25, 45 | 40 955 DA1 | 47 | 41 035 A00 | 199 |
| 40 623 DC1 | 216 | 40 802 A01 | 210 | 40 886 GNO | 25, 45 | 40 955 DC1 | 47 | 41 035 AL0 | 199 |
| 40 624 001 | 215 | 40 802 AL1 | 210 | 40 887 000 | 26 | 40 955 DL1 | 47 | 41 035 DAO0 | 199 |
| 40 624 AL1 | 215 | 40 802 DA1 | 210 | 40 887 AL0 | 26 | 40 955 GL1 | 47 | 41 035 DC0 | 199 |
| 40 624 DC1 | 215 | 40 802 DC1 | 210 | 40 887 DAO | 26 | 40 955 GN1 | 47 | 41 035 DL0 | 199 |
| 40 649 000 | 372 | 40 802 DL1 | 210 | 40 887 DCO | 26 | 40 956 001 | 47 | 41 035 GL0 | 199 |
| 40 649 DC0 | 372 | 40 802 GL1 | 210 | 40 887 DL0 | 26 | 40 956 AL1 | 47 | 41 035 GNO | 199 |

GROHE

SURVEY OF CONTENTS

| Ref. no. | Page | Ref. no. | Page | Ref. no. | Page | Ref. no. | Page |
|-------------|------|------------|----------|-------------|----------|------------|----------|
| 41 036 000 | 199 | 41 066 000 | 202 | 42 637 000 | 80 | 48 646 000 | 35 |
| 41 037 000 | 200 | 41 066 A00 | 202 | 43 | | 48 646 AL0 | 35 |
| 41 038 000 | 200 | 41 066 AL0 | 202 | 43 537 000 | 463 | 48 646 DAO | 35 |
| 41 038 A00 | 200 | 41 066 DAO | 202 | 45 | | 48 646 DC0 | 35 |
| 41 038 AL0 | 200 | 41 066 DC0 | 202 | | | 48 646 DL0 | 35 |
| 41 038 DAO0 | 200 | 41 066 DL0 | 202 | | | 48 646 GL0 | 35 |
| 41 038 DCO | 200 | 41 066 GL0 | 202 | 45 388 000 | 52, 61 | 48 646 GN0 | 35 |
| 41 038 DL0 | 200 | 41 066 GN0 | 202 | 45 459 000 | 329 | 48 651 000 | 36 |
| 41 038 GL0 | 200 | 41 067 000 | 202 | 45 914 XE0 | 329 | 48 651 AL0 | 36 |
| 41 038 GNO | 200 | 41 067 A00 | 202 | 45 984 001 | 19, 23 | 48 651 DAO | 36 |
| 41 039 000 | 200 | 41 067 AL0 | 202 | 46 | | 48 651 DC0 | 36 |
| 41 039 A00 | 200 | 41 067 DAO | 202 | | | 48 651 DL0 | 36 |
| 41 039 AL0 | 200 | 41 067 DC0 | 202 | 46 717 000 | 346 | 48 651 GL0 | 36 |
| 41 039 DAO0 | 200 | 41 067 DL0 | 202 | 46 944 001 | 419, 421 | 48 651 GNO | 36 |
| 41 039 DCO | 200 | 41 067 GL0 | 202 | 47 | | 49 | |
| 41 039 DL0 | 200 | 41 067 GN0 | 202 | 47 533 000 | 409 | 49 533 000 | 441 |
| 41 039 GL0 | 200 | 41 068 000 | 202 | 48 | | 49 533 SH0 | 441 |
| 41 039 GNO | 200 | 41 068 A00 | 202 | | | 49 534 000 | 441 |
| 41 049 000 | 200 | 41 068 AL0 | 202 | 48 053 000 | 278 | 49 534 SH0 | 441 |
| 41 049 A00 | 200 | 41 068 DAO | 202 | 48 054 000 | 278 | 66 | |
| 41 049 AL0 | 200 | 41 068 DC0 | 202 | 48 348 000 | 76, 255 | 66 791 000 | 454, 465 |
| 41 049 DAO0 | 200 | 41 068 DL0 | 202 | 48 349 000 | 277 | | |
| 41 049 DCO | 200 | 41 068 GL0 | 202 | 48 350 000 | 277 | | |
| 41 049 DL0 | 200 | 41 068 GN0 | 202 | 48 456 000 | 28 | | |
| 41 049 GL0 | 200 | 41 069 000 | 202 | 48 457 000 | 28 | | |
| 41 049 GNO | 200 | 41 069 A00 | 202 | 48 458 000 | 34 | | |
| 41 056 000 | 200 | 41 069 AL0 | 202 | 48 458 AL0 | 34 | | |
| 41 056 A00 | 200 | 41 069 DAO | 202 | 48 458 DAO | 34 | | |
| 41 056 AL0 | 200 | 41 069 DC0 | 202 | 48 458 DC0 | 34 | | |
| 41 056 DAO0 | 200 | 41 069 DL0 | 202 | 48 458 DL0 | 34 | | |
| 41 056 DCO | 200 | 41 069 GL0 | 202 | 48 458 GL0 | 34 | | |
| 41 056 DL0 | 200 | 41 069 GN0 | 202 | 48 458 GNO | 34 | | |
| 41 056 GL0 | 200 | 41 076 000 | 203 | 48 459 000 | 35 | | |
| 41 056 GNO | 200 | 41 076 A00 | 203 | 48 459 AL0 | 35 | | |
| 41 057 000 | 201 | 41 076 AL0 | 203 | 48 459 DAO | 35 | | |
| 41 058 000 | 201 | 41 076 DAO | 203 | 48 459 DC0 | 35 | | |
| 41 058 A00 | 201 | 41 076 DC0 | 203 | 48 459 DLO | 35 | | |
| 41 058 AL0 | 201 | 41 076 DLO | 203 | 48 459 GNO | 35 | | |
| 41 058 DAO0 | 201 | 41 076 GL0 | 203 | 48 459 GL0 | 35 | | |
| 41 058 DCO | 201 | 41 076 GN0 | 203 | 48 459 GN0 | 35 | | |
| 41 058 DL0 | 201 | 41 077 000 | 203 | 48 460 000 | 30 | | |
| 41 058 GL0 | 201 | 41 077 A00 | 203 | 48 461 000 | 30 | | |
| 41 058 GNO | 201 | 41 077 AL0 | 203 | 48 462 000 | 31 | | |
| 41 059 000 | 201 | 41 077 DAO | 203 | 48 463 000 | 31 | | |
| 41 059 A00 | 201 | 41 077 DC0 | 203 | 48 464 000 | 36 | | |
| 41 059 AL0 | 201 | 41 077 DL0 | 203 | 48 464 AL0 | 36 | | |
| 41 059 DAO0 | 201 | 41 077 GL0 | 203 | 48 464 DAO0 | 36 | | |
| 41 059 DCO | 201 | 41 077 GN0 | 203 | 48 464 DC0 | 36 | | |
| 41 059 DL0 | 201 | 41 215 KF0 | 203 | 48 464 DL0 | 36 | | |
| 41 059 GL0 | 201 | 41 216 KF0 | 200 | 48 464 GL0 | 36 | | |
| 41 059 GNO | 201 | 41 217 KF0 | 199 | 48 464 GNO | 36 | | |
| 41 063 000 | 201 | 41 218 KF0 | 199 | 48 465 000 | 36 | | |
| 41 063 A00 | 201 | 41 219 KF0 | 201 | 48 465 AL0 | 36 | | |
| 41 063 AL0 | 201 | 41 220 KF0 | 202 | 48 465 DAO | 36 | | |
| 41 063 DAO0 | 201 | 41 238 000 | 490 | 48 465 DC0 | 36 | | |
| 41 063 DCO | 201 | 42 | | 48 465 DL0 | 36 | | |
| 41 063 DL0 | 201 | | | 48 465 GL0 | 36 | | |
| 41 063 GL0 | 201 | 42 253 000 | 464 | 48 465 GNO | 36 | | |
| 41 063 GNO | 201 | 42 300 000 | 465 | 48 466 000 | 32 | | |
| 41 064 000 | 201 | 42 320 000 | 464 | 48 467 000 | 32 | | |
| 41 064 A00 | 201 | 42 327 000 | 449, 465 | 48 481 000 | 335, 346 | | |
| 41 064 AL0 | 201 | 42 333 000 | 449, 465 | 48 497 000 | 277 | | |
| 41 064 DAO0 | 201 | 42 632 00M | 454 | 48 498 000 | 278 | | |
| 41 064 DCO | 201 | 42 633 000 | 77 | 48 499 000 | 278 | | |
| 41 064 DL0 | 201 | 42 634 000 | 79 | 48 514 000 | 277 | | |
| 41 064 GL0 | 201 | 42 635 000 | 79 | 48 515 000 | 277 | | |
| 41 064 GNO | 201 | 42 636 000 | 79 | 48 543 001 | 329 | | |

Follow us on:



GROHE Regional HQ
Grome Marketing (Cyprus) Ltd.
P.O. Box 27048, CY-1641 Nicosia,
Cyprus
Phone: + 357 - 22 - 46 52 00

GROHE Headquarters:
GROHE AG
Feldmühleplatz 15
D-40545 Düsseldorf, Germany